



# XENON WALL LIGHT




## SCHEMATICS:




COVER DIAMETER



MOUNTING HOLE LOCATIONS



LOUVER, PRISM

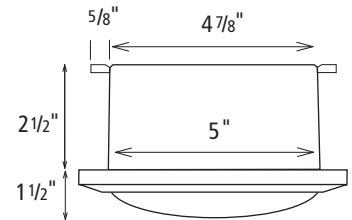

SCOOP

## DESCRIPTION:

Die cast aluminum surface or recessed mount Xenon light fixture of 18 watts. 110VAC input and output of fixture up to 66 fixtures per 15A tap. 10,000 hour average Xenon bulb life of 2800K color temperature. UL listed Wet Location. Offered in three cover styles and four fixture finishes.

## APPLICATIONS

- ▶ Interior steps
- ▶ Exterior steps
- ▶ Aisles
- ▶ Halls
- ▶ Paths
- ▶ Patio lighting
- ▶ Entry lighting
- ▶ Post lighting

## FEATURES

- ▶ Can be surface mounted or recessed into any hole 5" diameter and 3" deep
- ▶ "Knock off" surface mounting tabs
- ▶ 3 cover designs: Louver, Prism and Scoop
- ▶ 4 cover color options: White, Black, Bronze or Aluminum
- ▶ 10,000-hour average bulb life
- ▶ 110V Power Input
- ▶ Integral 12V class 2 transformer in each fixture
- ▶ Die cast aluminum can and cover; suitable for concrete pour
- ▶ UL listed for wet and IC locations
- ▶ Frosted glass lens
- ▶ Bulb replacement has low voltage safety
- ▶ 110V push-in connectors included for ease of power input
- ▶ Each fixture ships complete with can and cover

## ORDERING LOGIC:


XLW-Z-YY

## Z = FIXTURE TYPE

L = Louver Cover  
S = Scoop Cover  
P = Prism Cover

## YY = FIXTURE FINISH

WH = White  
BZ = Bronze  
BK = Black  
AL = Aluminum



WL-CC  
Wall Light Concrete Cap  
Required for all concrete pour and brick wall applications.

## SPECIFICATIONS:

<b>Voltage</b>	110V power input. Integral Class 2 12V transformer per fixture
<b>Fixture Energy Rating</b>	110VAC, 170mA, 18 watts
<b>Average Bulb Life</b>	10,000 hours
<b>Cover Finish</b>	White, black, bronze, or aluminum
<b>Can Finish</b>	White with white reflector
<b>Packaging</b>	Individually packaged in 2-color corrugated box
<b>Construction</b>	Both cover and can are die cast aluminum for corrosion protection, strength, weight, and consistency of finish
<b>Lens</b>	Frosted glass
<b>Wiring Options</b>	110V can be parallel wired ("daisy chained") up to 1188 watts (66 bulbs). One wire between each fixture completes chain. No custom cord required. Check local code and NEC for wiring selection
<b>Agency Approval</b>	UL listed and labeled wet and IC locations. Wall or surface mount only.



PROJECT:

TYPE:

NOTES: