


LED Outdoor Sconce combines the elegant design with high efficiency LEDs, making it ideal for use in up light and down light applications, for both indoor and outdoor.

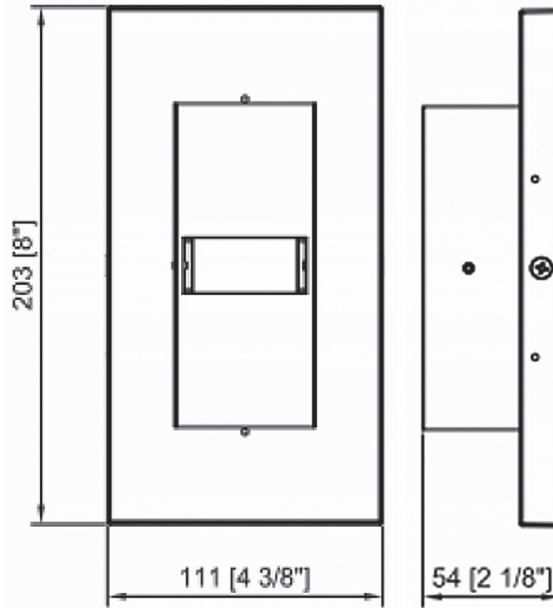

Features

- Housing – Rugged aluminum construction
- 120V - 277V AC input voltage
- Lumen output 1300LM
- CRI 80+
- Ambient temperature: -20C - 40C
- LED life: 50,000 hours
- Powder coated finish
- 120° beam angle
- cULus listed for wet locations
- 5 year limited warranty

Specifications

| | |
|-------------------|--|
| Electrical | 120V - 277V AC input voltage |
| CRI | 80+ |
| LED Lifetime | > 50,000 hrs. |
| CCT | 3000K/4000K |
| Lumen (lm) | 1300 |
| Beam Angle | 120° |
| Product Finish | Powder coated finish |
| Approved Location | cULus listed for wet locations |
| Appearance Size | 8" x 4 3/8" x 2 1/8" (203 x 111 x 54mm) |

Ordering Code

FIXTURE:

TLWMV15 WM

LED Color Temperature: 3(3000K), 4(4000K)
Finish: BR (Brown), BK (Black), SV (Silver)

COVERS:

TLWMV15XWM -01
TLWMV15XWM -02
TLWMV15XWM -04

Finish: BR (Brown), BK (Black), SV (Silver)

| | | | |
|---------|--|---------|--|
| Project | | Type | |
| Date | | Contact | |
| Notes | | | |

LED Outdoor Sconce combines the elegant design with high efficiency LEDs, making it ideal for use in up light and down light applications, for both indoor and outdoor.

Three Cover Options available
(Sold Separately)

