


T-LED Edge Light

T-LED Edge Light is an innovative solution for general and accent lighting in offices, hallways and commercial applications. Its perimeter illumination offers a unique edge lit look, replacing the traditional flat panels and troffers at a fraction of the cost.

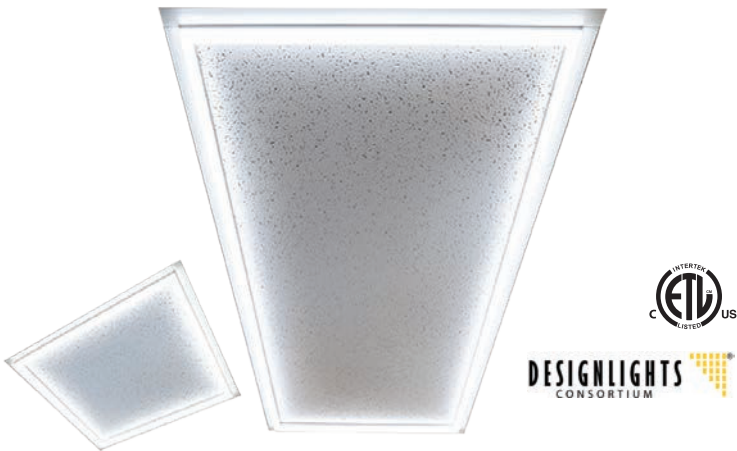

FEATURES

- Ideal replacement for traditional flat panels and troffers at a fraction of the cost
- Non-flicker, no dark spots
- Installs in minutes
- AC100-277V, 0-10V dimmable
- cETLus, DLC premium
- Ambient temperature: -20°C - 45°C
- Available in 2X2 and 2X4 versions
- Available in 3000K and 4000K
- Dry locations
- 5 year limited warranty

APPLICATIONS

- Retail
- Offices
- Hallways
- Elevators
- Banquet Halls
- Restaurants

SPECIFICATIONS



Color Temperature	3000K or 4000K
Input Voltage	AC100-277V
Power Consumption (W)	2X2=40 Watts 2X4=55 Watts
Lumen Output	2X2=4800LM 2X4=6600LM
LED Type	Integral SMD 2835 LEDs
Luminous Efficacy	120 Lumens per watt
Beam angle	120°
Color Rendering Index	>80
LED Life (hours)	50,000
Dimmable	0-10V
Approvals	cETLus, DLC

PRODUCT CODES

- TLE - **2X2** - **40** - **30**
TLE - **2X2** - **40** - **40**
TLE - **2X4** - **55** - **30**
TLE - **2X4** - **55** - **40**



- EXTENSION CORDS
(for remote driver placement)
TLE-EX-10
10 Ft extension cord
TLE-EX-30
30Ft extension cord

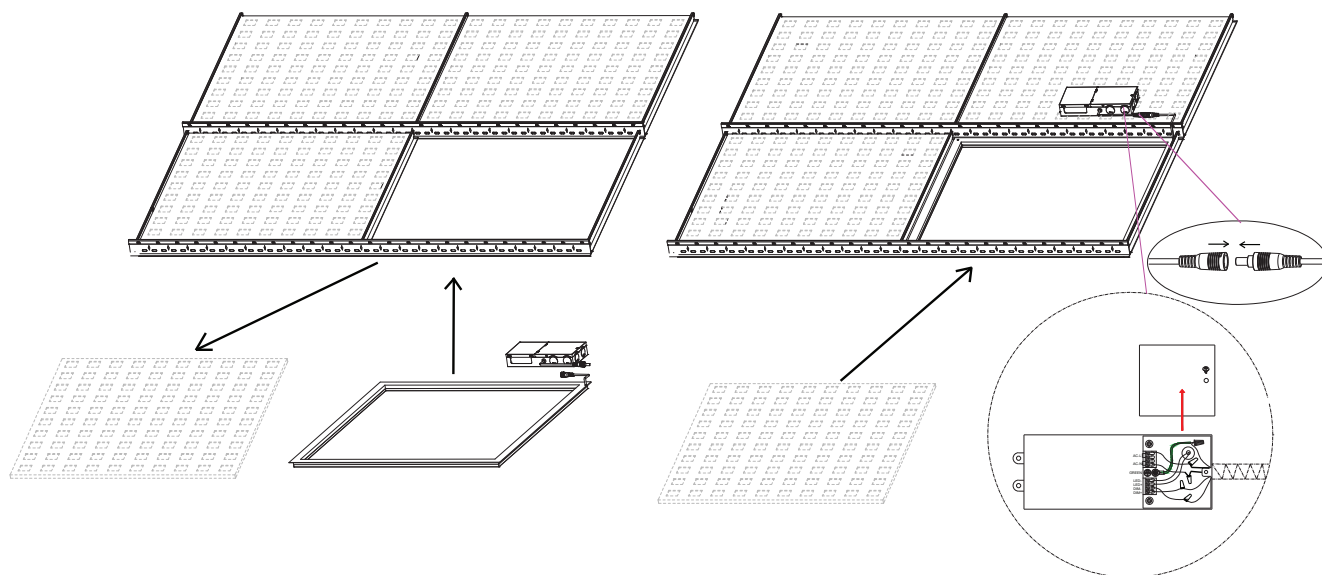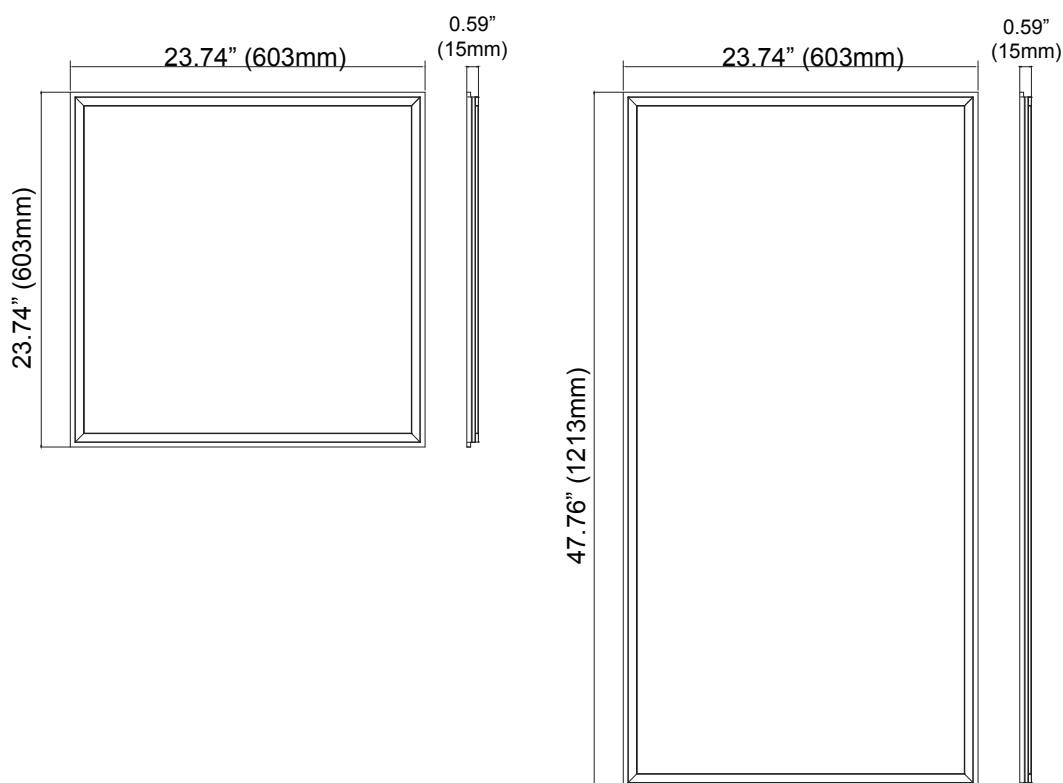

ACCESSORIES



TLE-DM

Driver mount bracket (for mounting the bracket to the T-BAR)



TLE-MC

Mounting clips (for fixture wire suspension)



BLD-HM20D-480800-10W

Emergency LED Driver
 Input voltage: 120-277V AC
 Output voltage: 25-48V DC
 Output power: 10W
 Emergency functioning time: >1.5 hours
 Dimensions: 14.1" x 2.4" x 1.3" (358mm x 60mm x 33mm)

NOTE: driver mount bracket (TLE-DM), and mounting clips (TLE-MC) are available (sold separately). Please check your local building codes, if these accessories are required.