5CCT LED Task Bar



Slim and elegant profile, linkable, and 5 color temperatures adjustable


With its slim profile and 5 adjustable color temperatures, the LED Task Bar is the perfect choice for the modern kitchen.

FEATURES


- Available in white finish
- 90+ CRI
- 120V Plug and cord and hardwire power cord available (sold separately)
- Available in 6 lengths: LEDLB-5CCT-10=9 3/4" (247mm) LEDLB-5CCT-12=12 3/8" (315mm) LEDLB-5CCT-18=17 1/2" (445mm) LEDLB-5CCT-24=22 5/8" (575mm) LEDLB-5CCT-36=34 7/16" (875mm) LEDLB-5CCT-48=46 1/4" (1175mm)
- Easy installation
- 5 position switch for color temperature adjustment 2700K/3000K/3500K/4000K/5000K
- Dimmable with TRIAC dimmers
- Linkable up to 200W using end to end connectors or jumper cords
- 12", 18", 24" and 32" jumper cords available (sold separately)
- cETLus listed for indoor use
- 3 years limited warranty

APPLICATIONS

- Under cabinet task light
- Over cabinet accent light
- Display cases and exhibits
- Merchandising
- Wall units and bars
- Office work stations





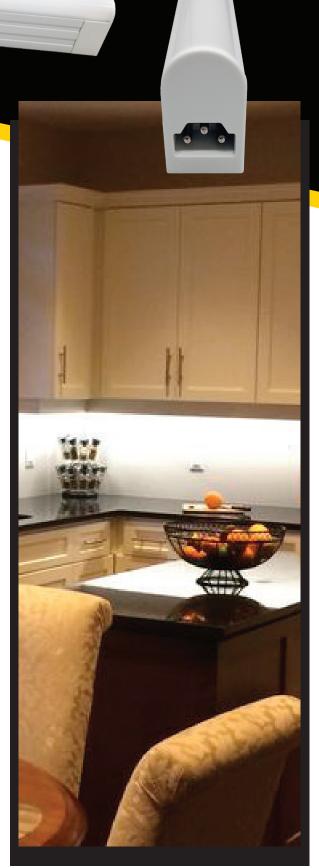

5CCT LED Task Bar

EASY INSTALLATION

Slim profile, linkable up to 200W using end to end connectors or jumper cords

ELECTRICAL

120V-277V AC

WARRANTY

3 Year Warranty. See full warranty details at www.nslusa.com.

NOTE:

Only LEDLB-5CCT-18, LEDLB-5CCT-24, LEDLB-5CCT-36 and LEDLB-5CCT-48 have ON/OFF switch.

SPECIFICATIONS

JI ECH ICATIONS	
LEDLB-5CCT-10 LEDLB-5CCT-12 LEDLB-5CCT-18 LEDLB-5CCT-24 LEDLB-5CCT-36 LEDLB-5CCT-48	
2700/3000/3500/4000/5000K	
120V-277V AC	
3.5/5/8/12/16/20W	
LEDLB-5CCT-10 (290 LM) LEDLB-5CCT-12 (443-541 LM) LEDLB-5CCT-18 (652-771 LM) LEDLB-5CCT-24 (966-1134 LM) LEDLB-5CCT-36 (1199-1393 LM) LEDLB-5CCT-48 (1599-1892 LM)	
SMD2835	
90+	
Up to 200W	
35,000	
110°	
cETLus	

ACCESSORIES (SOLD SEPARATELY)



LEDLB-J-1212" jumper cable

LEDLB-J-1818" jumper cable

LEDLB-J-24 24" jumper cable

LEDLB-J-32 32" jumper cable



LTSPRO-PC-72 72" power cord and plug

LTSPRO-HW-72 72" power cord for hardwire



LTSPRO-JB
Hardwire junction box
With ON/OFF switch, power
line mounting on the back and
2 output ports, it allows for
fixtures connections with jumper
cables (sold separately), on both
sides of the junction box.





