

LED Mini Star II

This award winning product is a sleek and powerful fixture ideal for in cabinet, under cabinet and showcase lighting.



FEATURES

- Light weight, ultra slim profile
- Fully dimmable with dimmable power supplies, sold separately
- Replaceable LED modules
- Long life 40,000 hours
- Comes with terminal block connector and cover for connection to low voltage power supply
- Available in 4 finishes White, Black, Bronze and Aluminum
- Safe 24V class 2 operation
- Easy to install
- 3 year limited warranty


APPLICATIONS

- Under cabinets
- Over cabinets
- Indirect lighting
- Display cases
- Furniture
- Shelf lighting
- Ceilings

PRODUCT CODES




Single Fixtures

LMSII - F - Y




SPECIFICATIONS


Electrical	24V DC, 3.26W
Current	136mA
LED Life	40,000 hours
LEDs per fixture	6
Lumen Output of LED Module	137 lumens
Efficacy	42 Lumens per Watt
Fixture Illuminance	404 lux 17 3/4" (45cm) above surface
CRI	83
Color Temperature	3000K
Operating Temperature	-5°C to 50°C
Product Material	Aluminum base, PC cover
Lens	Frosted glass
Cover Colors	White, Black, Bronze, Aluminum
Mounting	Wood screws provided or double sided tape provided
Dimensions	2 15/16" x 2 15/16" x 1/2" (75mm x 75mm x 13mm)
Approvals	cETLus

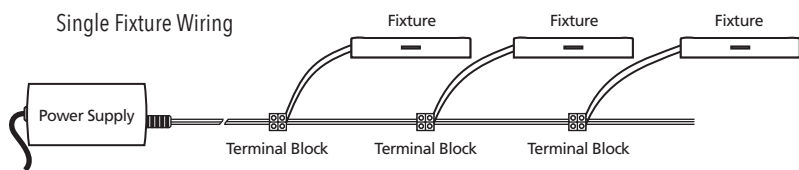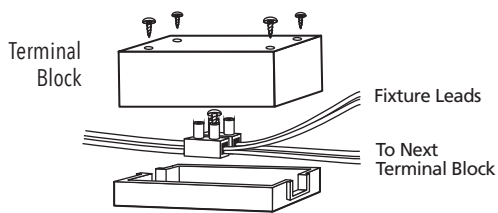

ACCESSORIES



LEDMOD-24-LP
Warm white LED replacement module, 2900K ± 200



WSC-004
Wire screw clips



LMSII-001
Terminal block and junction box for connection to additional lengths of power cable if needed

INDOOR/OUTDOOR DIMMABLE DRIVERS

TRE24L40DC

Maximum 10 LED Mini Star II fixtures
Min. load 8 watts or 3 LED Mini Star II fixtures
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

TRE24L96DC

Maximum 25 LED Mini Star II fixtures
Min. load 8 watts or 3 LED Mini Star II fixtures
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

NON DIMMABLE DRIVERS

LMS-24-18W

18 W plug in
Maximum 4 LED Mini Star II fixtures
Input: 100 - 240 V AC
Output: 24 V DC
3.46" x 1.97" x 1.34" (88 x 50 x 34mm)

LMS-24-60W

60 W plug in
Maximum 16 LED Mini Star II fixtures
Input: 100 - 240 V AC
Output: 24 V DC
4 3/4" x 2 1/2" x 1 1/2" (120 x 58 x 38mm)

LEDDR-24-120W

Indoor/Outdoor driver
Maximum 32 LED Mini Star II fixtures,
16 per single tap
Input: 100 - 240V AC
Output: 24V DC
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 55.6mm)