


LED Outdoor Sconce combines the elegant design with high efficiency LEDs, making it ideal for use in up light and down light applications, for both indoor and outdoor.

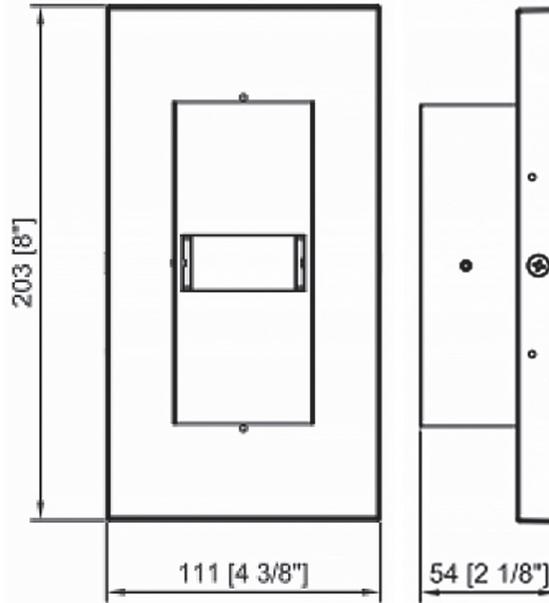

**Features**

- Housing – Rugged aluminum construction
- 120V - 277V AC input voltage
- Lumen output 1300LM
- CRI 80+
- Ambient temperature: -20C - 40C
- LED life: 50,000 hours
- Powder coated finish
- 120° beam angle
- cULus listed for wet locations
- 5 year limited warranty

**Specifications**

Electrical	120V - 277V AC input voltage
CRI	80+
LED Lifetime	> 50,000 hrs.
CCT	3000K/4000K
Lumen (lm)	1300
Beam Angle	120°
Product Finish	Powder coated finish
Approved Location	cULus listed for wet locations
Appearance Size	8" x 4 3/8" x 2 1/8" (203 x 111 x 54mm)

**Ordering Code**

**FIXTURE:**

LED Color Temperature: 3(3000K) 4(4000K)

Finish: BR (Brown) BK (Black) SV (Silver)

TLWMV15  WM

**COVERS:**

Finish: -01 -02 -04

TLWMV15XWM  -01

TLWMV15XWM  -02

TLWMV15XWM  -04

BR (Brown) BK (Black) SV (Silver)

Project		Type	
Date		Contact	
Notes			

*LED Outdoor Sconce combines the elegant design with high efficiency LEDs, making it ideal for use in up light and down light applications, for both indoor and outdoor.*

**Three Cover Options available**  
(Sold Separately)

