


LED Step Star Gen II



HIGHER LUMEN OUTPUT
UPGRADED TO 8 LED CHIP MODULES
REPLACEABLE LED MODULE KITS AVAILABLE

LED Step Star provides a safe, attractive and affordable way to light stairs, hallways and aiseways. LED Step Star is a highly effective and energy efficient recessed fixture suitable for indoor and outdoor use. LED Step Stars are made of cast aluminum for strength and corrosion protection and are suitable for concrete pour installations.



LOUVER



PRISM



SCOOP

Features

- ✓ 40,000-hour LED life
- ✓ Ultra low 5.2 watt energy usage per fixture
- ✓ CRI 80+
- ✓ Lumen output: 468LM
- ✓ 120VAC power input
- ✓ Up to 150 LED Step Star lights per 120VAC tap
- ✓ Die cast aluminum can and cover
- ✓ cETLus listed for indoor and outdoor applications including wet, IC, concrete pour, ceiling and shower locations
- ✓ Dimmable with most forward phase TRIAC dimming systems
- ✓ 3 year limited warranty

Applications

- Interior stairs
- Exterior stairs
- Aisles
- Hallways
- Paths
- Emergency lighting
- Theaters
- Public areas
- Patios
- Decks

Finish

- Powder Coated White
- Bronze
- Brushed Aluminum
- Black



LED Step Star Gen II

NSL
NATIONAL SPECIALTY LIGHTING
YOUR TRUSTED LIGHTING PARTNER

Anywhere that requires security or safety lighting in an aesthetically pleasing manner!

Finish

Available in White, Black, Bronze, and Aluminum.

Electrical

120VAC power input. Ultra low 5.2 watt energy per fixture.

Lamping

3000K +/-200K. Rated for 40,000 hrs. ≥ 80 CRI.

Certification

cETLus listed for wall, ceiling, wet and IC locations.

Warranty


Limited warranty: This fixture is free from defects in materials and workmanship for a period of 3 years from date of purchase.

Specifications


	LED Step Star – Gen II
Product Code	LST-II-X-WH-YY
LED Color	White (3000K +/-200)
Input Voltage	120V AC
Power Consumption (W)	5.2 Watts
Lumen Output	468LM
Can Finish	Powder Coated White
Color Rendering Index	≥ 80
Life Span (hours)	40,000
Lens	Frosted Tempered Glass
Wiring Options	Can be daisy chained up to 150 fixtures
Approvals	cETLus listed for wall, ceiling, wet and IC locations

† X = Cover option: L (Louver); P (Prism); S (Scoop)

* YY = Finish Color: WH (White); BK (Black); AL (Aluminum); BZ (Bronze)

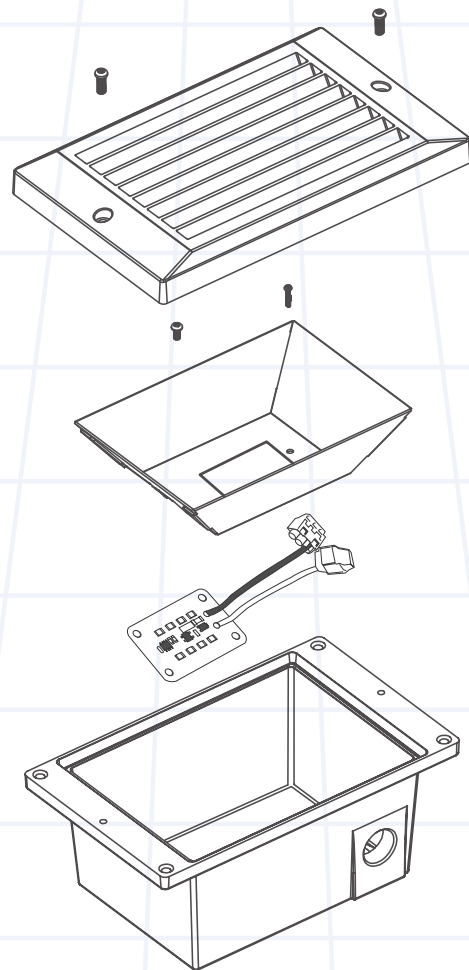

NOTE: for concrete installations, please use the concrete cap SL-CC

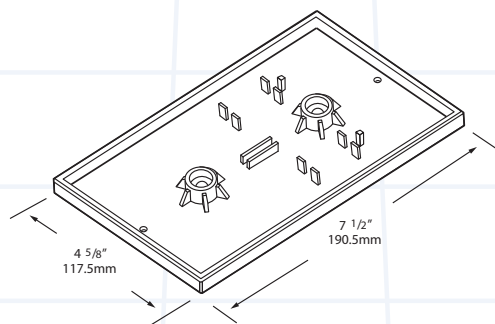

NSL
NATIONAL SPECIALTY LIGHTING
YOUR TRUSTED LIGHTING PARTNER

2299 Kenmore Ave., Tonawanda, NY 14207
T 800.527.2923 • F 800.527.4358 • nslsales@nslusa.com
nslusa.com