


T-LED Edge Light

FIXTURE INSTALLATION

T-LED Edge Light

TLE-2X2-40-30 TLE-2X2-40-40 TLE-2X4-55-30 TLE-2X4-55-40

Important: Read all instructions in order to ensure safety and proper installation.

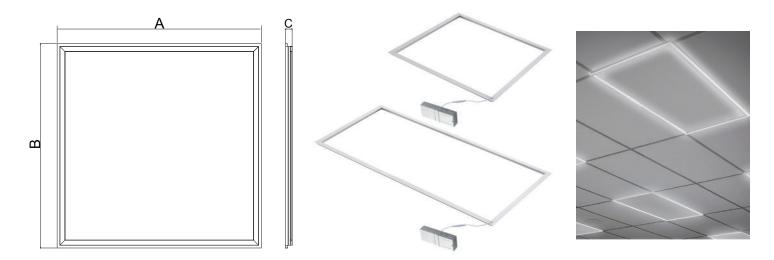

Dimensions	Α	В	С
2x2	23.74" (603mm)	23.74" (603mm)	0.59" (15mm)
2x4	47.76" (1213mm)	23.74" (603mm)	0.59" (15mm)

MAINTENANCE

■ Do not modify this fixture. Any modifications may render the product unsafe and void warranty.

Limited Warranty

INSTALLATION GUIDE


⚠ WARNING

Turn power OFF from electrical panel before installation or maintenance.

- 1.1 Remove the ceiling tile.
- 1.2 Place the T-LED Edge Light on the T-Bar carefully.
- 2.1 Place the driver on the adjacent tile, and connect the fixture to the driver using the quick connect.
- 2.2 Bring the incoming 120V AC to the driver: Black wire to AC-L connector, White wire to AC-N connector, and Green wire to green wire of the fixture. Replace the driver cover.
- 2.3 Replace the ceiling tile.

NOTE: the installation of these units should be carried out only by a licensed electrician.

CAUTION: Products should be installed in accordance with these instructions, current electrical codes and/or the current Canadian Electrical Code (CEC), or National Electrical Code (NEC).

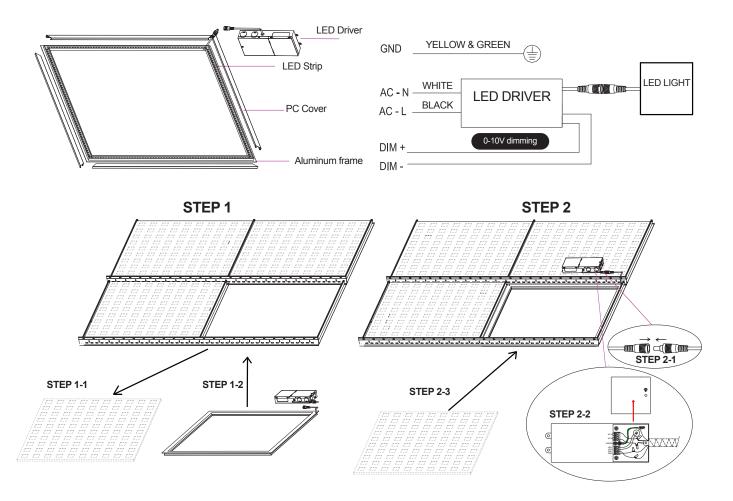

OPTIONAL:

NOTE: driver mount bracket (TLE-DM), and mounting clips (TLE-MC) are available (sold separately). Please check your local building codes, if these accessories are required.

