


24V AC, 300W outdoor & indoor magnetic transformer.

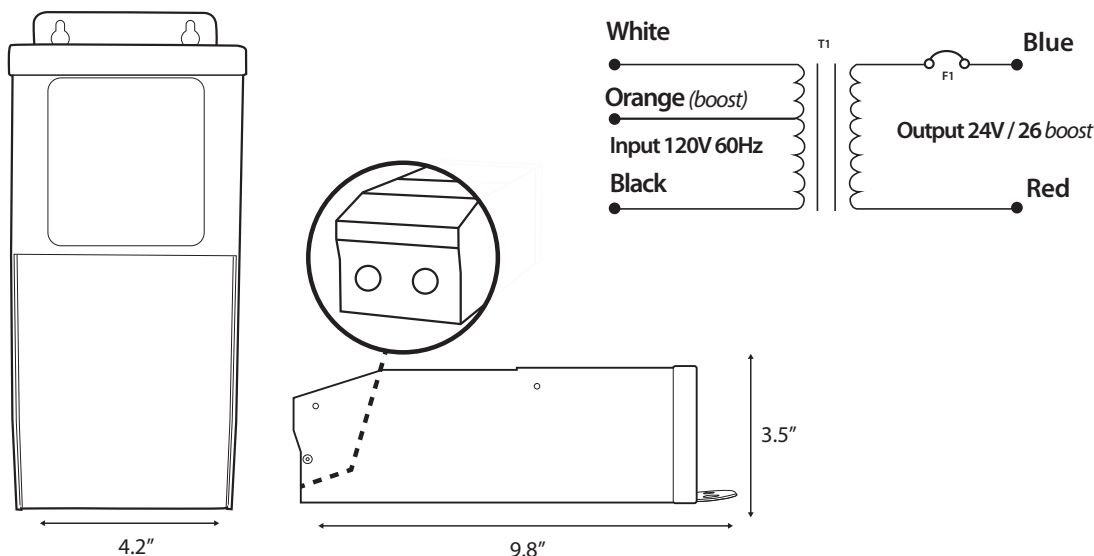

Features

- Manual reset thermal circuit breaker on the secondary side.
- Dimmable with any standard MLV TRIAC dimmer.
- cULus and cETLus listed
- NEMA 3R enclosure

Specifications

Max Load	300W
Input Voltage	120V AC
Input Current Full Load	2.5 A
Output Voltage Full Load	23V AC
Max Output Current Full Load	25 A
Open Circuit Output Voltage	23V AC
Efficiency	92%
Max. Ambient Temperature	-30°C to 50°C
Min. Installation Space Between Drivers	5"
Thermal Class	B130°C
Leads Primary	PVC 600V #18
Leads Secondary	PVC 300V #12
Dimensions L*W*H	9.8 in. x 4.2 in. x 3.5 in. (248.92 mm x 106.68 mm x 88.9 mm)
Weight	140 Oz.

Ordering Code

TR - 24 - 300

Project		Type	
Date		Contact	
Notes			