



XENON WALL LIGHT




SCHEMATICS:




COVER DIAMETER



MOUNTING HOLE LOCATIONS



LOUVER, PRISM

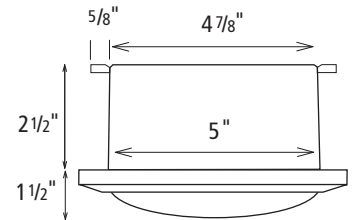

SCOOP

DESCRIPTION:

Die cast aluminum surface or recessed mount Xenon light fixture of 18 watts. 110VAC input and output of fixture up to 66 fixtures per 15A tap. 10,000 hour average Xenon bulb life of 2800K color temperature. UL listed Wet Location. Offered in three cover styles and four fixture finishes.

APPLICATIONS

- ▶ Interior steps
- ▶ Exterior steps
- ▶ Aisles
- ▶ Halls
- ▶ Paths
- ▶ Patio lighting
- ▶ Entry lighting
- ▶ Post lighting

FEATURES

- ▶ Can be surface mounted or recessed into any hole 5" diameter and 3" deep
- ▶ "Knock off" surface mounting tabs
- ▶ 3 cover designs: Louver, Prism and Scoop
- ▶ 4 cover color options: White, Black, Bronze or Aluminum
- ▶ 10,000-hour average bulb life
- ▶ 110V Power Input
- ▶ Integral 12V class 2 transformer in each fixture
- ▶ Die cast aluminum can and cover; suitable for concrete pour
- ▶ UL listed for wet and IC locations
- ▶ Frosted glass lens
- ▶ Bulb replacement has low voltage safety
- ▶ 110V push-in connectors included for ease of power input
- ▶ Each fixture ships complete with can and cover

ORDERING LOGIC:


XWL-Z-YY

Z = FIXTURE TYPE

L = Louver Cover
S = Scoop Cover
P = Prism Cover

YY = FIXTURE FINISH

WH = White
BZ = Bronze
BK = Black
AL = Aluminum



WL-CC
Wall Light Concrete Cap
Required for all concrete pour and brick wall applications.

SPECIFICATIONS:

Voltage	110V power input. Integral Class 2 12V transformer per fixture
Fixture Energy Rating	110VAC, 170mA, 18 watts
Average Bulb Life	10,000 hours
Cover Finish	White, black, bronze, or aluminum
Can Finish	White with white reflector
Packaging	Individually packaged in 2-color corrugated box
Construction	Both cover and can are die cast aluminum for corrosion protection, strength, weight, and consistency of finish
Lens	Frosted glass
Wiring Options	110V can be parallel wired ("daisy chained") up to 1188 watts (66 bulbs). One wire between each fixture completes chain. No custom cord required. Check local code and NEC for wiring selection
Agency Approval	UL listed and labeled wet and IC locations. Wall or surface mount only.



PROJECT:

TYPE:

NOTES: