


120V Mini Flood Light (CCT)

Achieve perfect outdoor lighting for any occasion with CCT Adjust Mini Flood Lights, featuring adjustable CCTs for versatile illumination. Their compact size and high efficiency make them a smart choice for diverse landscape applications.



FEATURES


- Adjustable CCT (3000K/4000K/5000K)
- High lumen output
- Easy installation
- Wide beam angle
- Long lifespan (50,000 hours)
- Instant start, no flicker
- Wattage options (15W, 30W, 50W)
- Wet location rated
- 5 years warranty

APPLICATIONS

- Facade accenting
- Garden highlights
- Outdoor art display
- Parking areas
- Entryway illumination
- Commercial exteriors


SPECIFICATIONS

Product Code	FL-15-CT	FL-30-CT	FL-50-CT	
Electrical	Input Voltage	100 -277V AC		
	Power Consumption	15W	30W	50W
Specs	Colour Temperature	3000/4000/5000K		
	CRI	80+		
	Lumen Output	3000K: 1725-1950LM	3000K: 3450-3900LM	3000K: 5750-6500LM
		4000K: 2025-2250LM	4000K: 4050-4500LM	4000K: 6750-7500LM
		5000K: 1875-2100LM	5000K: 3750-4200LM	5000K: 6250-7000LM
	Efficacy (LM/W)	Up to 150		
	Dimmable	No, but wattage adjustable		
Beam Angle	150° x 120° (7H6V)			
LED	Type	SMD3030 (1W)		
	Life Span	50,000 Hours		
Design	Dimensions (Inches)	6 5/8 x 8 x 1 3/4"	6 5/8 x 8 x 1 3/4"	7 5/16 x 9 7/16 x 1 15/16"
	Dimensions (Millimeters)	168.3 x 204 x 43.7 mm	168.3 x 204 x 43.7 mm	201 x 239 x 49 mm
	Finish	Black		
	Material	N/A		
	Operating Temperature	-20 to 50°C		
	Approved Location	Wet		
	Mounting	Via Stake		
Warranty	5 years			
Approvals	cULus listed for wet locations			

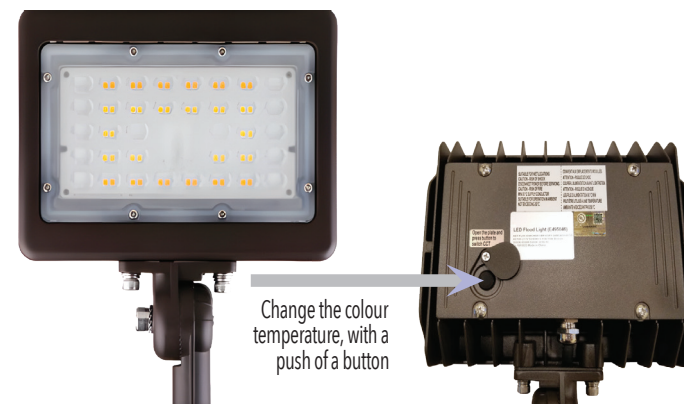


DIAGRAM


15W and 30W

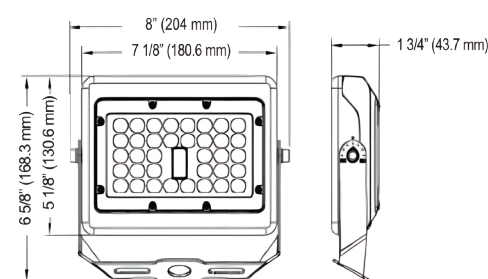


50W

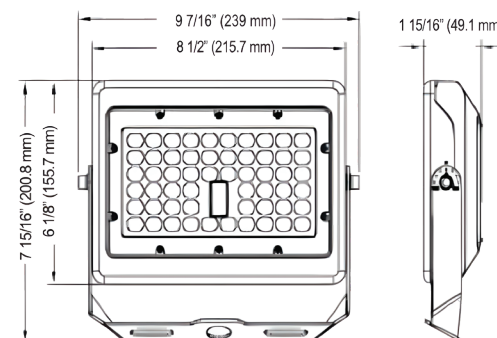

MOUNTING ACCESSORIES




FL-TR
Trunnion mount bracket
To use for wall and ground mount




FL-Y-15/30/50
Yoke mount bracket
To use for wall and ground mount



FL-SH-15/30/50
Glare shield



FL-WG-15/30/50
Wire guard

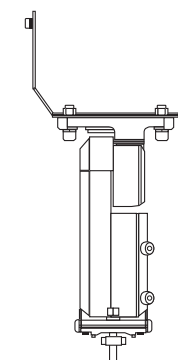

FL-ADM-15/30/50
Universal mount bracket
For use on poles