


T-LED Edge Light CCT is an innovative solution for general and accent lighting in offices, hallways and commercial applications. Its perimeter illumination offers a unique edge lit look, replacing the traditional flat panels and troffers.

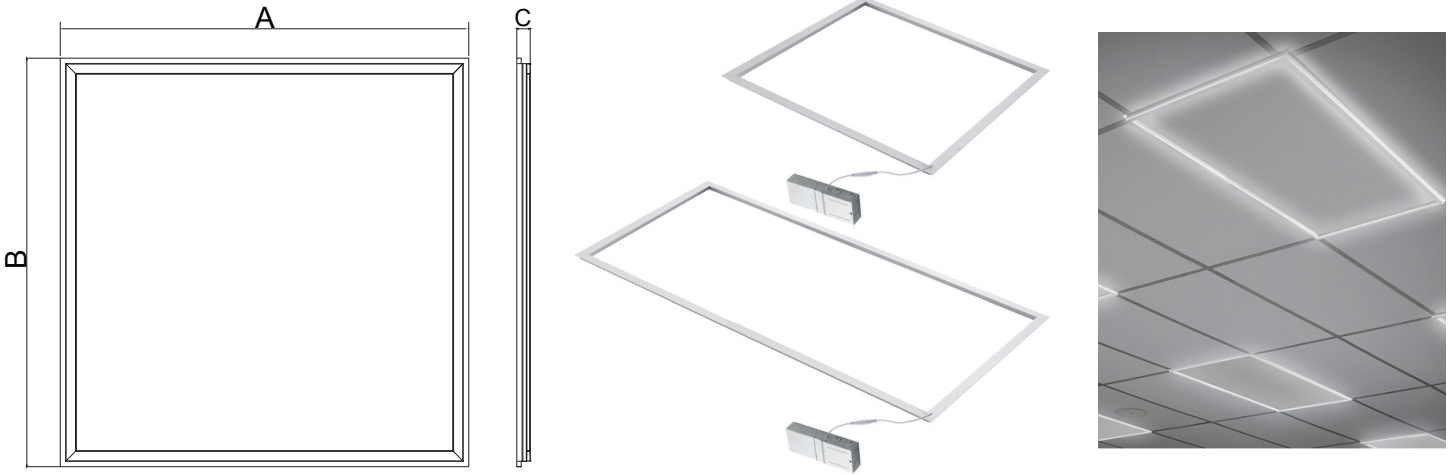

Dimensions	A	B	C
2x2	23.74" (603mm)	23.74" (603mm)	0.59" (15mm)
2x4	47.76" (1213mm)	23.74" (603mm)	0.59" (15mm)

Size	Wattage Adjustment	CCT Adjustment
2x2	20/30/40W	3500/4000/5000K
2x4	40/50/60W	3500/4000/5000K

### Features

- Ideal replacement for traditional flat panels and troffers
- Non-flicker, no dark spots
- AC100-277V, 0-10V dimmable
- cETLus, DLC premium
- Ambient temperature: -20°C - 45°C
- Dry locations
- 5 year limited warranty

### Residential Applications

- Kitchens
- Bathrooms
- Laundry rooms
- Pantries
- Rec Rooms

### Commercial Applications

- Retail
- Offices
- Hallways
- Elevators
- Banquet Halls
- Restaurants

### Specifications

Color Temperature	3500/4000/5000K adjustable
Input Voltage	AC100-277V
Power Consumption (W)	2X2=20/30/40 watts adjustable 2X4=40/50/60 watts adjustable
Lumen Output	2X2=2200-4400LM 2X4=4400-6600LM
CRI	>80
LED Life	50,000 hours
Dimmable	0-10V
Beam angle	120°
Approvals	cETLus, DLC


### Ordering Code

TLE-2X2-K40-3050  
TLE-2X4-K60-3050

Project		Type	
Date		Contact	
Notes			

# T-LED Edge Light CCT

*T-LED Edge Light CCT is an innovative solution for general and accent lighting in offices, hallways and commercial applications. Its perimeter illumination offers a unique edge lit look, replacing the traditional flat panels and troffers.*

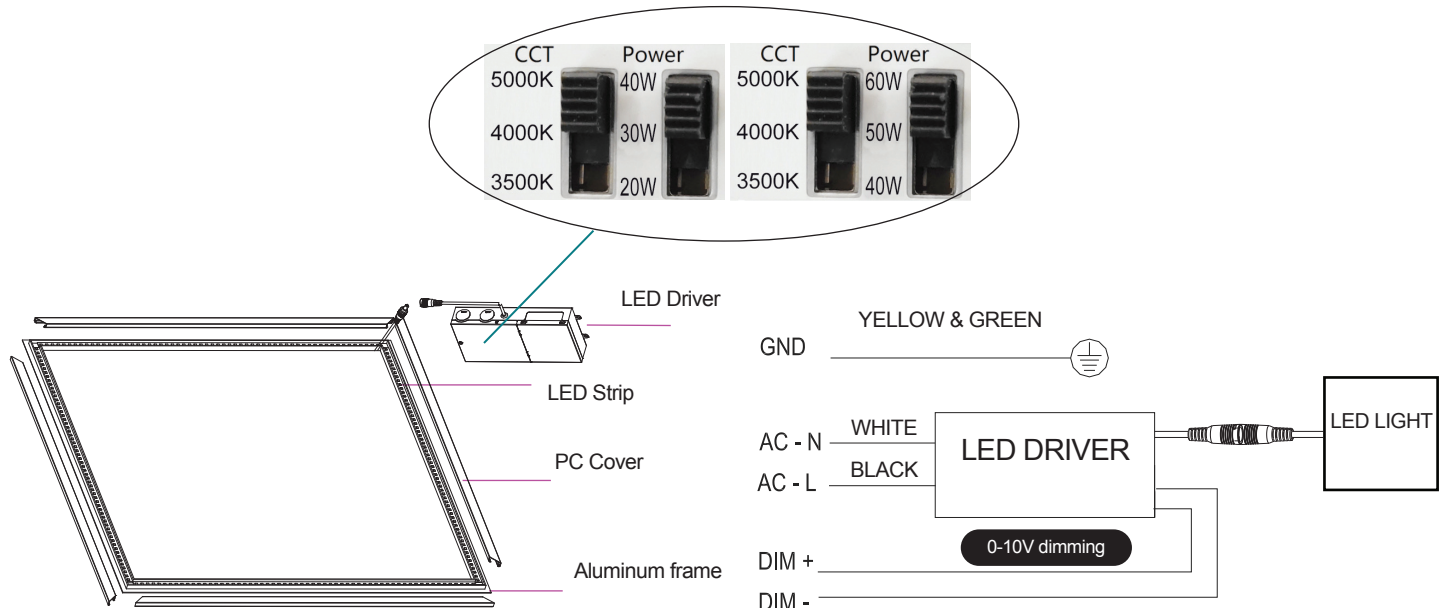

**OPTIONAL:**

**NOTE:** driver mount bracket (TLE-DM), and mounting clips (TLE-MC) are available (sold separately). Please check your local building codes, if these accessories are required.

