



120V-277V AC 3 Color Temperature LED Thin Line Down Light



DIMMABLE



6", 12 watts. Designed for remodel and new construction, wet locations listed, Thin Line Downlights are a versatile and affordable choice for countless applications.

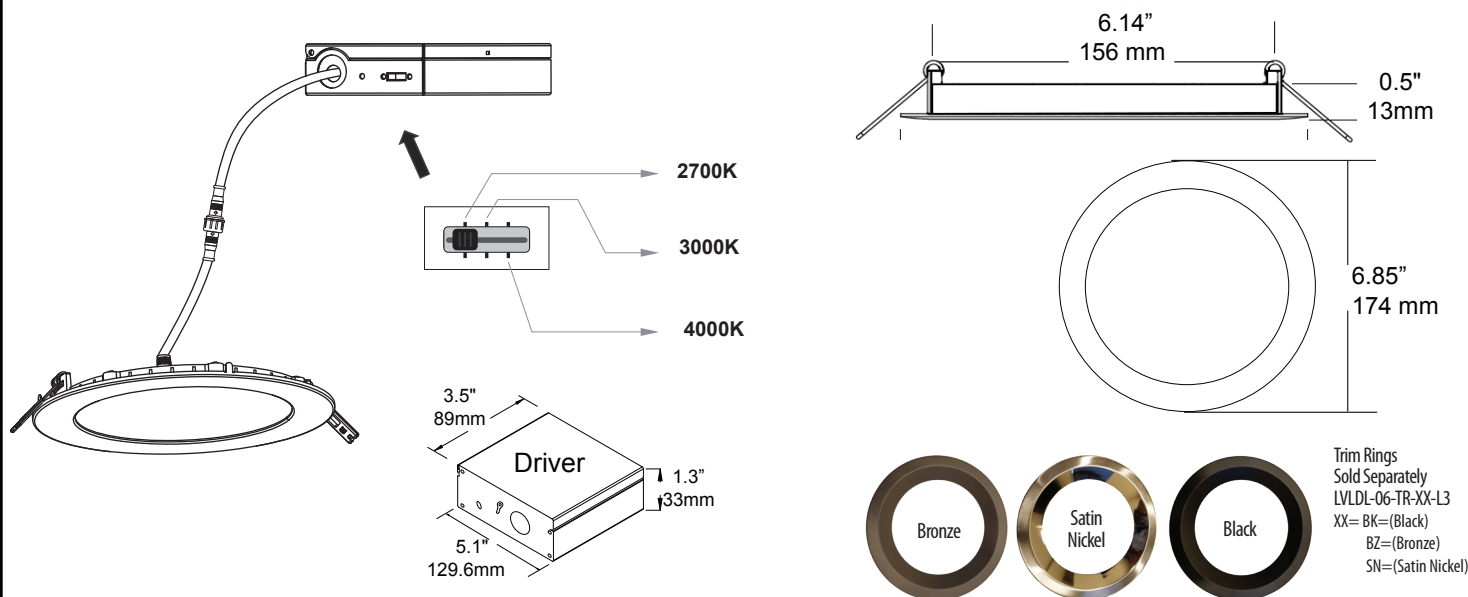

Features

- Input voltage: 120V-277V AC
- 120° beam spread
- 3-position switch for color temperature adjustment 2700K/3000K/4000K
- Two spring loaded clips to attach to any ceiling material
- Suitable for wet location
- 0-10V dimmable on 120V AC (non-dimmable on 277V AC)
- No IC can required
- 50,000 hour life
- 5 year limited warranty
- Airtight
- cETLus, Energy Star

Specifications

Color Temperature	3-position switch for color temperature adjustment 2700K/3000K/4000K
Input Voltage	120V-277V AC
Power Consumption (W)	12W
Luminous Flux	840LM
Beam	120° beam spread
Dimmable	0-10V dimmable on 120V AC; (non-dimmable on 277V AC)
Life Span (hours)	50,000
Approvals	cETLus, Energy Star

Ordering Code:


LVLDL-06-CCT-WH-R-L3-277

Project		Type	
Date		Contact	
Notes			

120V-277V AC 3 Color Temperature LED Thin Line Down Light




DIMMABLE



6", 12 watts. Designed for remodel and new construction, wet locations listed, Thin Line Downlights are a versatile and affordable choice for countless applications.

LVLDL-CP-6-L3

Construction Plate

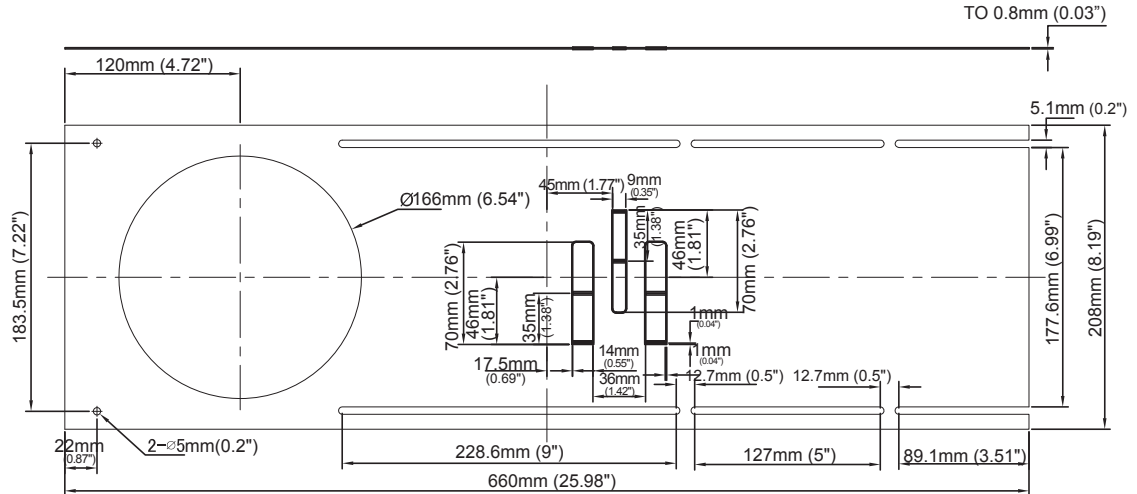

Note: this item is sold separately.