

120V-277V AC 3 Color Temperature LED Thin Line Down Light

NSL
NATIONAL SPECIALTY LIGHTING
YOUR TRUSTED LIGHTING PARTNER

NOW AVAILABLE in 277V AC!

Designed for remodel and new construction, wet locations listed, Thin Line Down Lights are a versatile and affordable choice for countless applications.

FEATURES

- Input voltage: 120V-277V AC
- 120° beam spread
- 3-position switch for color temperature adjustment
2700K/3000K/4000K
- Available in 4" and 6" sizes
- Two spring loaded clips to attach to any ceiling material
- Interchangeable brushed nickel, black and bronze trim rings available (sold separately)
- Suitable for wet location
- 0-10V dimmable on 120V AC (non-dimmable on 277V AC)
- No IC can required
- 50,000 hour life
- 5 year limited warranty
- Airtight
- cETLus, Energy Star

APPLICATIONS

- | | | |
|-----------------------|-----------------|-------------------|
| • Kitchens & Pantries | • Lobbies | • Retail lighting |
| • Laundry Rooms | • Hallways | • Restaurants |
| • Bathrooms | • Banquet Halls | • Offices |
| | • Elevators | |

YOUR TRUSTED LIGHTING PARTNER / NSLUSA.COM

Trim Rings



120V-277V AC 3 Color Temperature LED Thin Line Down Light

3 Color Temperatures

3-position switch for color temperature adjustment 2700K/3000K/4000K.

0-10V dimmable on 120V AC (non-dimmable on 277V AC)

Electrical

120V-277V AC

Accessories

NOTE: Construction plates available for new construction

LVLDL-CP-4-L3 / LVLDL-CP-6-L3

Trim Rings Sold Separately

LVLDL-04-TR-XX-L3 / LVLDL-06-TR-XX-L3

XX= BK=(Black), BZ=(Bronze), SN=(Satin Nickel)

*For detailed specs please consult our website


Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

SPECIFICATIONS

Product Code	LVLDL-04-CCT-WH-R-L3-277 LVLDL-06-CCT-WH-R-L3-277
Color Temperature	3-position switch for color temperature adjustment 2700K/3000K/4000K
Input Voltage	120V-277V AC
Power Consumption (W)	9W / 12W
Luminous Flux	600-645LM / 888-948LM
Efficacy	67-72LM/W / 74-79LM/W
Beam	120° beam spread
Installation Hole Size	4" = 4 5/16" 6" = 6 5/16"
Dimmable	0-10V dimmable on 120V AC; (non-dimmable on 277V AC)
Life Span (hours)	50,000
Approvals	cETLus, Energy Star

Appearance Size

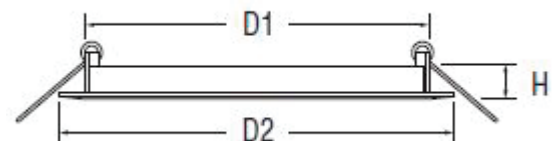

4"

D1=4 3/16"

D2=4 3/4"

H=1/2"

6"

D1=6 1/8"

D2=6 7/8"

H=1/2"

