


# LED Wall Washer

The LED Wall Washer is the ideal solution for architectural, signage, and landscape lighting applications.

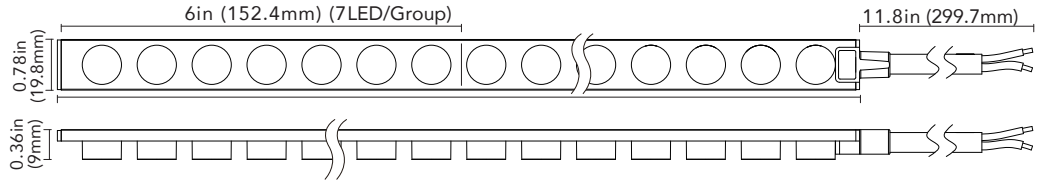

## Features

- Safe 24V DC operation
- Low power consumption: 5.8W/FT
- Suitable for indoor and outdoor use
- Beam angle: 30°
- Available in 2700K, 3000K, 4000K color temperatures
- Dimmable with dimmable drivers
- Field cuttable every 6". Custom cuts available.
- Long life 30,000 hours
- cULus certified for wet locations
- 3 year limited warranty

## Specifications

Color Temperature	2700K, 3000K, 4000K
Input Voltage	24V DC
Power Consumption (W)	5.8W/FT
Luminous Flux	580LM/FT(2700K), 610LM/FT(3000K), 640LM/FT(4000K)
Efficacy	100LM/W (2700K), 105LM/W (3000K), 110LM/W(4000K)
LEDs	SMD2835
CRI	90+
Max Run	16 FT
Life Span (hours)	30,000
Beam Angle	30°
Approvals	cULus for wet locations

## Ordering Codes:

ES-LS2835-27K-42-24-30

ES-LS2835-30K-42-24-30

ES-LS2835-40K-42-24-30




## NOTE:

The product is sold in 33FT rolls, but the maximum single run is 16FT. Custom lengths available.

Project		Type	
Date		Contact	
Notes			


# LED Wall Washer

## Mounting Clips Installation


		
<p>Install mounting clips with the screws provided.</p>	<p>Insert the LED Wall Washer in the mounting clips.</p>	<p>Power the LED Wall Washer with the 24V DC driver.</p>

## Installation with "L" type extrusion to reduce glare

### Ceiling Mounting



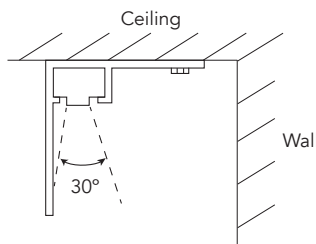


### Floor Mounting

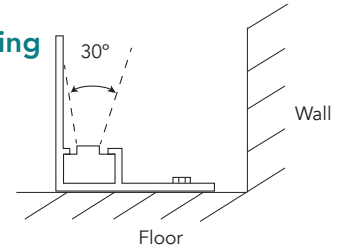

### Wall Mounting

Several wall mounting brackets available, to enhance the wall washing effects in various applications.

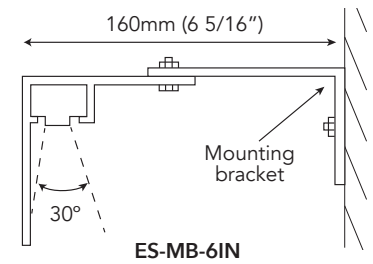

### Accessories:



**ES-PFC-6FT**  
6FT Power Feed Connector



**ES-JC-6IN**  
6IN Jumper Cable  
**ES-JC-12IN**  
12IN Jumper Cable  
**ES-JC-3FT**  
3FT Jumper Cable  
**ES-JC-6FT**  
6FT Jumper Cable




**ES-EC**  
End Cap



**NFLX-GLUE**  
Glue

### Extrusions:



**ES-EXT**  
Aluminum extrusion (8FT), anodized black, for ceiling or floor mounting. For wall mounting, please see the wall mounting brackets.



Three wall mounting brackets available to enhance the wall washing effect in various applications.



**ES-MC**  
Mounting Clips (4pcs/bag)

**ES-MB-2IN**  
2IN Wall Mounting Bracket

**ES-MB-4IN**  
4IN Wall Mounting Bracket

**ES-MB-6IN**  
6IN Wall Mounting Bracket

### Indoor/Outdoor Dimmable Drivers

**TRE24L40DC**  
6.77" X 2.67" X 1.26" (171 X 68 X 32mm)

**TRE24L96DC**  
6.77" X 2.67" X 1.26" (171 X 68 X 32mm)

### Non-Dimmable Drivers

**LEDDR-24-120W**  
Indoor/Outdoor driver 120W hardwire  
Input: 100 - 240V AC; Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)