


# LED Tape Light INDOOR and OUTDOOR

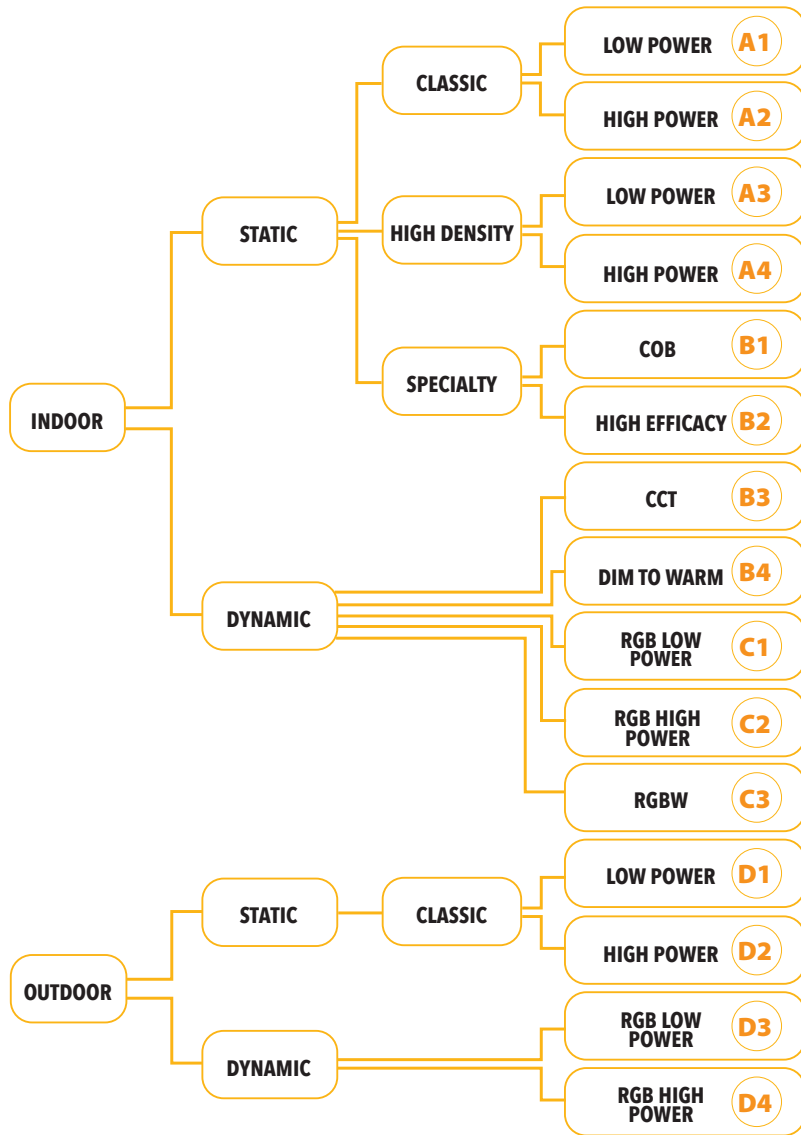

## APPLICATION:

- A1**
  - Under Cabinet
  - Cove (Low to Mid Ambient Light)
- A2**
  - Cove (High Ambient Light)
  - Dark Surfaces (Higher Lumen)
  - Under Cabinet
- A3 A4**
  - High CRI: 90+
  - Wall Grazing
  - Displays
- B1 B2 B3 B4**
  - Displays
  - Retail
  - Shelves
  - Under Cabinet
  - Displays / Accent
  - Back Lighting
  - Cove (High Ambient Light)
- C1 C2 C3**
  - Architectural
  - Entertainment
  - Retail
- D1 D2 D3 D4**
  - Architectural
  - Building Outlines
  - Signage

## DRIVERS:

- DIMMABLE**  
NOTE: Dimmable drivers are only compatible with static tape
- A1 A2 A3 A4 B1 B2 B4 D1 D2**
  - TRE24L40DC**  
MAX LOAD: 36W
  - TRE24L96DC**  
MAX LOAD: 90W
- NON-DIMMABLE**
- A1 A2 A3 A4 B1 B2 B3 C1 C2 C3 D1 D2 D3 D4**
  - LEDDR-24-120W**  
MAX LOAD: 90W / 120W  
Combined two secondary taps

## CONTROLLERS:

- C1 C2 D3 D4**
  - LT-09S-RF**
- C1 C2 D3 D4**
  - LN-CON-WIFI-3CH-XV**
- B3**
  - LT-031-RF**
- C3**
  - LT-11S-RF**



**A**

**B**

**C**

**D**

**1**

**CLASSIC LOW POWER**

**LTP-20-YY-H90-LP** for white color temperatures  
**LTP-20-YY-LP** for RD, AM, GR, BL


- POWER: 2.2W/ft
- CUTTABLE: 2.6"/6.5"
- MAX. RUN: 40'
- CRI: >90 for white color temperatures
- LUMEN: 150 LM/FT; 72 LPW
- COLOR: 2700K, 3000K, 3500K, 4000K, 6500K, RD, AM, GR, BL



**CHIP-ON-BOARD**

**LTP-20-YY-COB-H90** for white color temperatures  
**LTP-20-YY-COB** for RD, AM, GR, BL

- POWER: 4.2W/ft
- CUTTABLE: 2"
- MAX. RUN: 20'
- CRI: >90 for white color temperatures
- LUMEN: 410 LM/FT; 89 LPW
- COLOR: 2700K, 3000K, 3500K, 4000K, 6500K, RD, AM, GR, BL



**RGB LOW POWER**

**LTP-20-RGB-LP**

- POWER: 2.2W/ft
- CUTTABLE: 6.5"
- MAX. RUN: 40'
- CONTROLLERS: TOUCH: LT-09S-RF, WiFi: LN-CON-WIFI-3CH-XV



IP66  
**LOW POWER OUTDOOR**  
**LTP-OD-20-YY-LP-H90**

- POWER: 2.2W/ft
- CUTTABLE: 2.6"
- MAX. RUN: 40'
- CRI: >90
- COLOR: 2700K, 3000K, 3500K, 4000K, 6500K



**2**

**CLASSIC HIGH POWER**

**LTP-20-YY-H90** for white color temperatures  
**LTP-20-YY** for RD, AM, GR, BL

- POWER: 4.3W/ft
- CUTTABLE: 4"/1.3"
- MAX. RUN: 20'
- CRI: >90 for white color temperatures
- LUMEN: 300 LM/FT; 70 LPW
- COLOR: 2700K, 3000K, 3500K, 4000K, 6500K, RD, AM, GR, BL



**HIGH EFFICACY**  
**LTP-16-YY-HE-H90**

- POWER: 5.1W/ft
- CUTTABLE: 1.3"
- MAX. RUN: 16'
- CRI: >90
- LUMEN: 594 LM/FT; 115 LPW
- COLOR: 2700K, 3000K, 3500K, 4000K, 6500K



**RGB HIGH POWER**  
**LTP-20-RGB**

- POWER: 4.3W/ft
- CUTTABLE: 4"
- MAX. RUN: 20'
- CONTROLLERS: TOUCH: LT-09S-RF, WiFi: LN-CON-WIFI-3CH-XV



IP66  
**HIGH POWER OUTDOOR**  
**LTP-OD-20-YY-H90**

- POWER: 4.3W/ft
- CUTTABLE: 4"
- MAX. RUN: 20'
- CRI: >90
- COLOR: 2700K, 3000K, 3500K, 4000K, 6500K



**3**

**HIGH DENSITY LOW POWER**  
**LTP-16-YY-HD-LP-H90**

- POWER: 2.9W/ft
- CUTTABLE: 2"
- MAX. RUN: 31'
- CRI: >90
- LUMEN: 234 LM/FT; 80 LPW
- COLOR: 3000K, 4000K, 6500K



**CCT COLOR TEMPERATURE ADJUST**  
**LTP-16-CCT-H90**

- POWER: 5.1W/ft
- CUTTABLE: 2"
- MAX. RUN: 16'
- CRI: >90
- LUMEN: 300 LM/FT
- COLOR RANGE: 2500K - 7000K
- CONTROLLER: LT-031-RF



**RGBW [RGB + WHITE]**  
**LTP-20-RGBW-H90**

- POWER: 4.3W/ft
- CUTTABLE: 4"
- MAX. RUN: 20'
- CRI: >90 for white color temperatures
- CONTROLLERS: LT-11S-RF
- COLOR: 3000K, 4000K, 6500K



IP66  
**RGB LOW POWER OUTDOOR**  
**LTP-OD-20-RGB-LP**

- POWER: 2.2W/ft
- CUTTABLE: 6.5"
- MAX. RUN: 40'
- CONTROLLERS: TOUCH: LT-09S-RF, WiFi: LN-CON-WIFI-3CH-XV



**4**

**HIGH DENSITY HIGH POWER**  
**LTP-16-YY-HD-H90**

- POWER: 5.8W/ft
- CUTTABLE: 1"
- MAX. RUN: 16'
- CRI: >90
- LUMEN: 468 LM/FT; 80 LPW
- COLOR: 3000K, 4000K, 6500K



**DIM TO WARM**  
**LTP-16-WW-DIM-H90**

- POWER: 5.5W/ft
- CUTTABLE: 2"
- MAX. RUN: 16'
- CRI: >90
- LUMEN: 437 LM/FT
- COLOR RANGE: 1800K - 3000K



IP66  
**RGB HIGH POWER OUTDOOR**  
**LTP-OD-20-RGB**

- POWER: 4.3W/ft
- CUTTABLE: 4"
- MAX. RUN: 20'
- CONTROLLERS: TOUCH: LT-09S-RF, WiFi: LN-CON-WIFI-3CH-XV

