

# LED TAPE LIGHT

## Dim to Warm

Suitable for both hospitality and residential applications creating an inviting atmosphere.



### FEATURES

- 1 Bin
- 2 Step MacAdam Ellipse
- 3oz PCB board
- 3M Adhesive
- 50,000 hours life
- Field cuttable every 50mm (2")
- Low power consumption
- Auto Warm-dim technology
- Available in 16' (5m) and 100' (30.48m) spools (custom cuts available)
- 16' spools come with 6Ft pre-soldered power feeds
- Safe, 24V DC operation
- Dim-to-warm: 1800K to 3000K
- No special controllers required
- 6 years limited warranty

### APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

### PRODUCT CODES


16Ft spools  
LTP - 16 - WW - DIM - H90

100Ft spools  
LTP - 100 - WW - DIM - H90

Custom cuts  
LTP - XX - WW - DIM - H90

### SPECIFICATIONS

Electrical	24V DC, 5.5W/FT
LED Type	Epistar
Viewing Angle	120°
LED Life	50,000 hours
# of LEDs per foot	240
Maximum single run	16'
Custom cuttable	50mm (2")
Lumen Output	449LM/FT
Color Temperature	1800K-3000K
CRI	>90
Approvals	cETLus

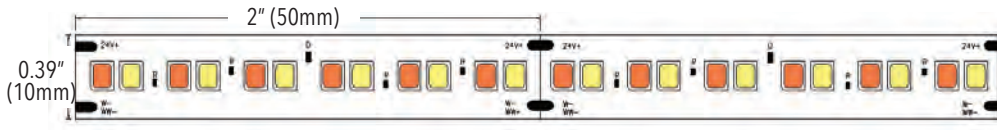


## ACCESSORIES



**LTP-001-HD-HP-6**  
72" Power feed connector  
for high density indoor



**LMSII-001**  
Terminal block and junction  
box for connection to  
additional lengths of power  
cable if needed



**LTP-010-S**  
Clear PVC mounting  
"U" channel

**NOTE: See page 34-35 for the complete range of aluminum extrusions.**

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE24L40DC

Max 6.5' (1.98m)  
Min 8 Watts, 1.45' (0.44m)  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE24L96DC

Max 16' (5m)  
Min 8 Watts, 1.45' (0.44m)  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)