

# LED TAPE LIGHT

## High Power RGBW Indoor

Offers dynamic range of color and dedicated white for greater versatility suitable for all market segments.



### HIGH POWER RGB LTP-20-RGBW SERIES



#### FEATURES

- 50,000 hours life
- High brightness 5050 SMD LEDs
- Field cuttable
- Low power consumption
- Available in 20' (6.1m) and 100' (30.48m) spools (custom cuts available)
- RGB color change plus 3000K, 4000K and 6500K color temperatures
- 20' spools come with 6 ft. pre-soldered power feeds
- Safe, 24V class 2 power supplies (sold separately)
- 6 year limited warranty

#### APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

#### PRODUCT CODES

20Ft spools

LTP - 20 - RGBYY - H90

**LED COLOR**

- 3000K
- 4000K
- 6500K

100Ft spools

LTP - 100 - RGBYY - H90

**LED COLOR**

- 3000K
- 4000K
- 6500K

Custom cuts


LTP - XX - RGBYY - H90

**LED COLOR**

- 3000K
- 4000K
- 6500K

#### SPECIFICATIONS

Electrical	24V DC, 4.3W/ft
LED Type	High Brightness 5050 SMD LEDs
Viewing Angle	120°
LED Life	50,000 hours to 70% initial lumen output
LED Spacing	16mm (0.63")
# of LEDs per foot (304mm)	18
Maximum Single Run	20'
Custom Cuttable	4"
CRI	>90 for white color temperatures
Approvals	cETLus

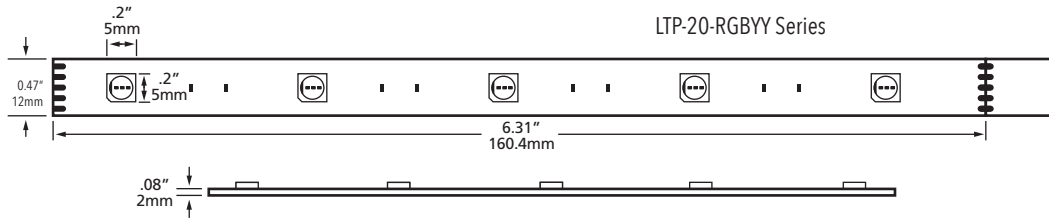

## ACCESSORIES



**LTP-001-RGBW-6**  
72" Power feed connector  
for RGBW indoor  
**LTP-001-RGBW-12**  
144" Power feed connector  
for RGBW indoor



**LTP-002-RGBW**  
In-line connector for RGBW  
indoor



**LTP-001-RGBW-6IN**  
6" In-line connector for  
RGBW indoor



**LT-115-RF**  
RGBW controller



**LT-490A**  
RGBW signal amplifier  
*NOTE: Network cable with  
RJ45 connectors required  
(not supplied)*

**NOTE: See page 34-35 for the complete range of aluminum extrusions.**

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver  
Max. recommended load 90W or 20' (6.1m) per single tap,  
120W or 27' (8.23m) combined two secondary taps.  
120W hardwire  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)