

Low Power, RGB Indoor

For more subtle approaches within entertainment venues and restaurants.



FEATURES


- 50,000 hours life
- High brightness 5060 SMD LEDs
- Field cuttable
- Low power consumption
- Available in 20' (6.1m) and 100' (30.48m) spools (custom cuts available)
- 20' spools come with 6 ft. pre-soldered power feeds
- Safe, 24V class 2 power supplies (sold separately)
- 6 years limited warranty

APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

SPECIFICATIONS

| SPECIFICATIONS | | |
|----------------|--------------------------|------------------------------------|
| Product Code | | LTP-XX-RGB-LP (XX: Length in feet) |
| Electrical | Input Voltage | 24V DC |
| | Power Consumption | 2.2W/Ft |
| Specs | Color Temperature | RGB |
| | Dimmable | Yes |
| | Beam Angle | 120° |
| LED | Type | High Brightness 5060 SMD LEDs |
| | Life Span | 50,000 Hours |
| | Spacing | 32mm |
| | # per foot (304mm) | 9 |
| Design | Dimensions (Inches) | .39" W |
| | Dimensions (Millimeters) | 10mm W |
| | Max Single Run Length | 40Ft |
| | Custom Cuttable | 6.5" |
| | Approved Location | Indoor |
| Warranty | 6 years | |
| Approvals | cETLus | |

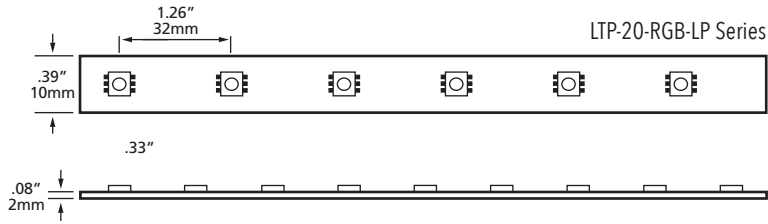

PRODUCT CODES

XX: Length in feet

20Ft spools

LTP - 20 - RGB - LP

100Ft spools

LTP - 100 - RGB - LP

Custom Cuts

LTP - XX - RGB - LP


ACCESSORIES




LTP-001-RGB-6R
72" Power feed connector for RGB indoor. Add "-L" for opposite end.



LTP-002-RGB
In-line connector for RGB indoor



LTP-010-S
Clear PVC mounting "U" channel



LTP-001-RGB-6IN
6" In-line connector for RGB indoor



LT-WIFI-AMP
WiFi Signal Amplifier for RGB, RGBW, CCT



LT-WIFI-RM
4-Zone RGB+CCT Remote



LT-WIFI-CTRL
3 IN 1 LED Strip Controller (WiFi+2.4G)

LTP-001-RGB-2IN
2" In-line connector for RGB indoor

NOTE: See page 36-37 for the complete range of aluminum extrusions.

NON DIMMABLE DRIVERS

LEDDR-24-120W
Indoor/Outdoor driver
Max 17.6 (5.3m) per single tap
Max 23' (7m) combined 2 secondary taps
Input: 100 - 240V AC
Output: 24V DC
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)