




# NSL

NATIONAL SPECIALTY LIGHTING

YOUR TRUSTED LIGHTING PARTNER

**2020/2021  
CATALOG**



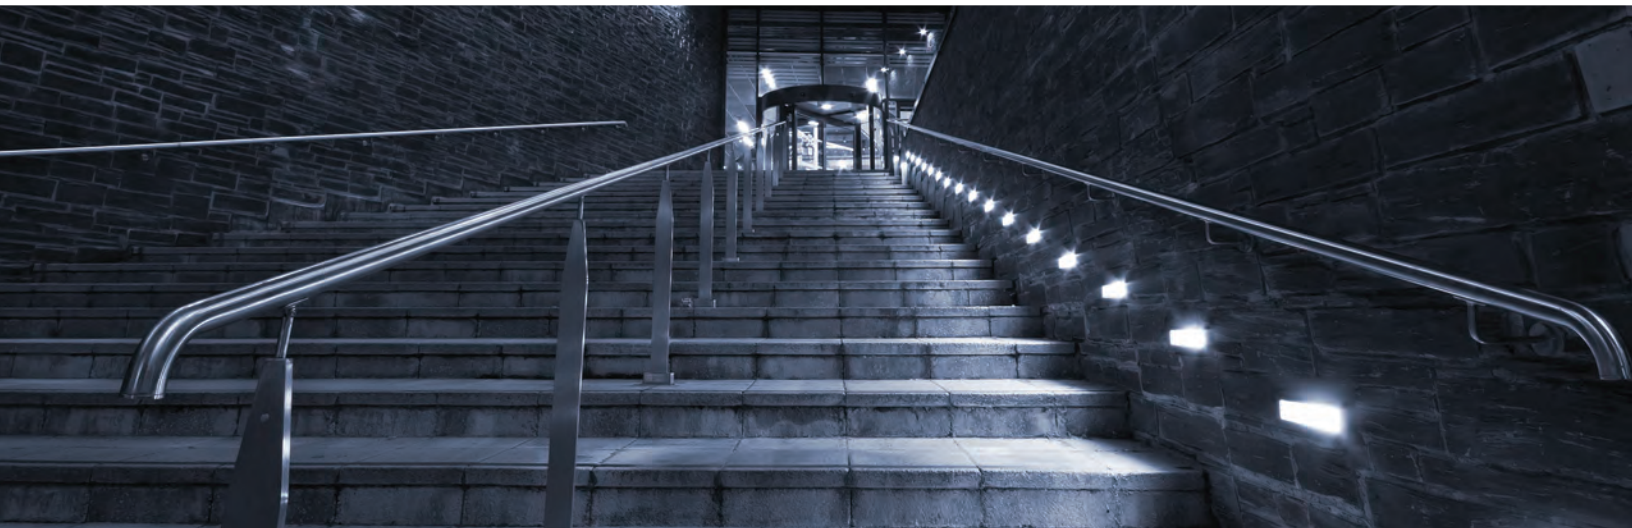



## ABOUT NSL

In business since 1988, National Specialty Lighting (NSL) has become a trusted supplier of top-quality architectural and specialty lighting products for the American market.

From the latest in LED to tried-and-true traditional technologies, we're proud to offer a broad spectrum of architectural and specialty lighting options including task lighting, linear lighting, general area lighting, landscape lighting, decorative lighting and more.

We ship daily from our fully-stocked warehouse in Tonawanda, New York – and through our network of stocking distributors across the United States – to ensure prompt delivery of our products when and where you need them.

## OUR PROMISE TO YOU

### WE'VE GOT YOU COVERED – EVERY STEP OF THE WAY

Over the course of more than 30 years, we've earned our customers' trust by consistently delivering:

1. **Personal customer service** that leverages and reflects the skills, experience and knowledge we've acquired in our three decades in the lighting business.
2. **Proven quality** with independent third-party safety and performance test results to prove it.
3. **Innovative solutions** designed to make it as easy as possible for the end-user to choose – and install – our products.

**We see each customer as a long-term partner – and your success as our success.**



# Table of Contents

## LINEAR LIGHTING

LED Tape Light High Power Indoor .....	4
LED Tape Light Low Power Indoor .....	6
High Density LED Tape Light High Power Indoor .....	8
High Density LED Tape Light Low Power Indoor .....	10
LED Tape Light High Efficacy, Indoor .....	12
LED Tape Light COB, Indoor .....	14
LED Tape Light Dim to Warm .....	16
LED Tape Light High Power RGB Indoor .....	18
LED Tape Light Low Power RGB Indoor .....	20
LED Tape Light High Power RGBW Indoor .....	22
LED Tape Light CCT Indoor .....	24
LED Tape Light High Power Outdoor .....	26
LED Tape Light Low Power Outdoor .....	28
LED Tape Light High Power RGB Outdoor .....	30
LED Tape Light Low Power RGB Outdoor .....	32
LED Tape Light Extrusions .....	34
LED eStrip .....	36
High Power LED eStrip .....	38
RGB LED eStrip .....	40
LED Neon Flex .....	42
LED Globe Light .....	44
LED Wedge Light .....	46
Gen II LED Hard Strip .....	48
LED Britestrip .....	50

## UNDER CABINET LIGHTING

Gen II 3-Color LED Task Star .....	52
LED Task Star PRO .....	54
LED Task Star .....	56
LED Edgelit Puck Lights .....	58

## DECORATIVE LIGHTING

Ceiling Lights .....	60
Wall Sconces .....	61



## DOWN LIGHTING – RECESSED & SURFACE

LED Thin-Line Round Down Light Gen III .....	62
LED Thin-Line Square Down Light Gen III .....	66
3-Color Temperature LED Thin-Line Down Light .....	68
LED Regressed Down Light CCT .....	70
High Power Thin-line LED Down Lights.....	72
LED Gimbal Down Lights - GDL-3 .....	74
LED Gimbal Down Lights - GDL-4 .....	75
Round LED Surface Mount Down Lights .....	76
Square LED Surface Mount Down Lights .....	78
T-LED Edge Light .....	80
T-LED Edge Light CCT .....	82

## INDUSTRIAL LIGHTING

Tri-Proof Lights .....	84
100W LED Work Light .....	86
60W LED Work Light.....	88
LED String Work Light .....	89

## WAYFINDING – STAIRWAYS, HALLWAYS, PATHWAYS

LED Disc Light .....	90
LED Disc Light Dome .....	92
LED MiniDisc Light .....	94
LED MiniDisc Light (Scoop) .....	96
LED Switch Star .....	98
LED Step Star GEN II .....	100
LED Brick Star GEN II .....	102
LED Outdoor Sconce.....	104
CCT Adjust Mini Flood Light .....	106

## LED DRIVERS AND LED CONTROLLERS

Switchex®.....	108
LED Drivers Selector Chart .....	110
LED Controllers List .....	112

## TRANSFORMERS

Transformers .....	114
--------------------	-----

# LED TAPE LIGHT

## High Power Indoor

Suitable for high ceiling coves or areas that require higher illumination. Commercial, retail, hospitality and residential applications.



### HIGH POWER SINGLE COLOR LTP-20 SERIES

#### FEATURES

- 1 Bin
- 2 Step MacAdam Ellipse
- 3oz PCB board
- 3M Adhesive
- 50,000 hours life
- High brightness 5060 SMD LEDs
- Field cuttable
- Low power consumption
- Available in 20' (6.1m) and 100' (30.48m) spools (custom cuts available)
- Safe, 24V class 2 power supplies (sold separately)
- Fully dimmable with dimmable power supplies (sold separately)
- 20' spools come with 6 ft. pre-soldered power feeds
- 6 year limited warranty

#### APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

#### SPECIFICATIONS

Electrical	24V DC, 4.3W/ft
LED Type	High Brightness 5060 SMD LEDs
Viewing Angle	120°
LED Life	50,000 hours to 70% initial lumen output
LED Spacing	16mm (0.63")
# of LEDs per foot (304mm)	18
Maximum Single Run	20'
Lumen Output	325 Lumens per ft 6500K 300 Lumens per ft 4000K 293 Lumens per ft 3500K 285 Lumens per ft 3000K 280 Lumens per ft 2700K
Efficacy	75 LPW 6500K, 70 LPW 4000K, 68 LPW 3500K, 66 LPW 3000K, 65 LPW 2700K
Custom Cuttable	1.3" (33mm)
Color Temperature	2700K, 3000K, 3500K, 4000K, 6500K
CRI	> 90 for white color temperatures
Approvals	cETLus

#### PRODUCT CODES

20Ft spools  
LTP - 20 - **YY** - H90

##### LED COLOR

2700K  
3000K  
3500K  
4000K  
6500K

100Ft spools  
LTP - 100 - **YY** - H90

##### LED COLOR

2700K  
3000K  
3500K  
4000K  
6500K

Custom cuts  
LTP - XX - **YY** - H90

##### LED COLOR

2700K  
3000K  
3500K  
4000K  
6500K

LTP - 20 - **YY**

##### LED COLOR

**RD** - Red  
**AM** - Amber  
**GR** - Green  
**BL** - Blue

LTP - 100 - **YY**

##### LED COLOR


**RD** - Red  
**AM** - Amber  
**GR** - Green  
**BL** - Blue

LTP - XX - **YY**

##### LED COLOR

**RD** - Red  
**AM** - Amber  
**GR** - Green  
**BL** - Blue



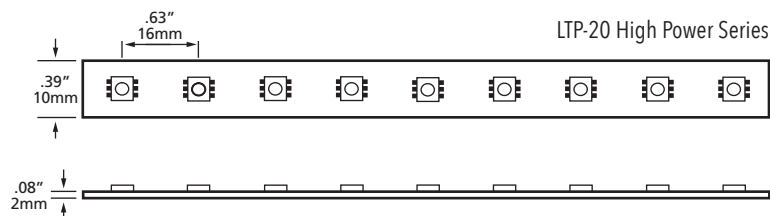

## ACCESSORIES



**LTP-001-6R**  
72" Power feed connector for single color indoor. Add "-L" to code for opposite end, add "-CM" for through wall connections.

**LTP-001-12R**

**LTP-001-12L**

12FT Power Feed Connector



**LTP-002**

In-line connector for single color indoor



**LTP-STP-6IN**

5.9" (15cm)

**LTP-STP-2IN**

2" (5cm)

**LTP-STP-2**

2' (61cm)

**LTP-STP-12**

12' (3.65m)

In-line connector for single color indoor




**LTP-003-6DC**

DC connector for LED Tape Light with 6" wire and DC connector



**LMSII-001**

Terminal block and junction box for connection to additional lengths of power cable if needed



**LTP-010-S**

Clear PVC mounting "U" channel



**LV-SPIR-1CH-LV**

PIR Motion Sensor, 1

Channel, 24V DC

NOTE: To be used with non dimmable drivers only

**NOTE: See page 34-35 for the complete range of aluminum extrusions.**

## INDOOR/OUTDOOR DIMMABLE DRIVERS

**TRE24L40DC**

Max recommended load 36W or 8' LED Tape, min 8W or 2' LED Tape  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

**TRE24L96DC**

Max recommended load 90W or 20' LED Tape, min 8W or 2' LED Tape  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

## NON DIMMABLE DRIVERS

**LEDDR-24-120W**

Indoor/Outdoor driver

Max. recommended load 90W or 20' (6.1m) per single tap, 120W or 27' (8.23m) combined two secondary taps.

120W hardwire

Input: 100 - 240V AC

Output: 24V DC

10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

## NON DIMMABLE PLUG IN DRIVERS

**LMS-24-18W**

**LMS-24-60W**

# LED TAPE LIGHT

## Low Power Indoor

Great choice for under cabinet and coves offering subtle lighting effects.



### LOW POWER SINGLE COLOR LTP-20-LP SERIES

#### FEATURES

- 1 Bin
- 2 Step MacAdam Ellipse
- 3oz PCB board
- 3M Adhesive
- 50,000 hours life
- High brightness 5060 SMD LEDs
- Field cuttable
- Low power consumption
- Available in 20' (6.1m) and 100' (30.48m) spools (custom cuts available)
- Safe, 24V class 2 power supplies (sold separately)
- Fully dimmable with dimmable power supplies (sold separately)
- 20' spools come with 6 ft. pre-soldered power feeds
- 6 year limited warranty

#### APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

#### PRODUCT CODES

20Ft spools  
LTP - 20 - **YY** - H90 - LP

##### LED COLOR

2700K  
3000K  
3500K  
4000K  
6500K

100Ft spools  
LTP - 100 - **YY** - H90 - LP

##### LED COLOR

2700K  
3000K  
3500K  
4000K  
6500K

Custom cuts  
LTP - **XX** - **YY** - H90 - LP

##### LED COLOR

2700K  
3000K  
3500K  
4000K  
6500K

LTP - 20 - **YY** - LP

##### LED COLOR

**RD** - Red  
**AM** - Amber  
**GR** - Green  
**BL** - Blue

LTP - 100 - **YY** - LP

##### LED COLOR

**RD** - Red  
**AM** - Amber  
**GR** - Green  
**BL** - Blue

LTP - **XX** - **YY** - LP


##### LED COLOR

**RD** - Red  
**AM** - Amber  
**GR** - Green  
**BL** - Blue

#### SPECIFICATIONS

Electrical	24V DC, 2.2W/ft
LED Type	High Brightness 5060 SMD LEDs
Viewing Angle	120°
LED Life	50,000 hours to 70% initial lumen output
LED Spacing	32mm (1.26")
# of LEDs per foot (304mm)	9
Maximum Single Run	40'
Lumen Output	165 Lumens per ft 6500K 150 Lumens per ft 4000K 148 Lumens per ft 3500K 145 Lumens per ft 3000K 143 Lumens per ft 2700K
Efficacy	75 LPW 6500K, 68 LPW 4000K, 67 LPW 3500K, 66 LPW 3000K, 65 LPW 2700K
Custom Cuttable	2.6"/6.5"
Color Temperature	2700K, 3000K, 3500K, 4000K, 6500K
CRI	> 90 for white color temperatures
Approvals	cETLus



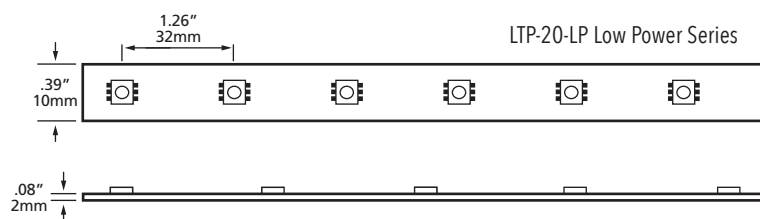

## ACCESSORIES



**LTP-001-6R**  
72" Power feed connector for single color indoor. Add "-L" to code for opposite end, add "-CM" for through wall connections.

**LTP-001-12R**

**LTP-001-12L**  
12FT Power Feed Connector



**LTP-002**  
In-line connector for single color indoor




**LTP-STP-6IN**  
5.9" (15cm)  
**LTP-STP-2IN**  
2" (5cm)  
**LTP-STP-2**  
2' (61cm)  
**LTP-STP-12**  
12' (3.65m)  
In-line connector for single color indoor



**LTP-003-6DC**  
DC connector for LED Tape Light with 6" wire and DC connector



**LMSII-001**  
Terminal block and junction box for connection to additional lengths of power cable if needed



**LTP-010-S**  
Clear PVC mounting "U" channel



**LV-SPIR-1CH-LV**  
PIR Motion Sensor, 1 Channel, 24V DC  
NOTE: To be used with non dimmable drivers only

**NOTE: See page 34-35 for the complete range of aluminum extrusions.**

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE24L40DC

Max recommended load 36W or 16' LED Tape,  
min 8W or 4' LED Tape  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE24L96DC

Max recommended load 90W or 40' LED Tape,  
min 8W or 4' LED Tape  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver  
Max. recommended load 90W or 40' (12.1m) per single tap,  
120W or 54' (16.46m) combined two secondary taps.  
120W hardwire  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

## NON DIMMABLE PLUG IN DRIVERS

### LMS-24-18W

### LMS-24-60W

# HIGH DENSITY LED TAPE LIGHT

## High Power Indoor

Ideal for display cabinets needing high illumination.  
Can be used as a wall grazer offering great vertical illumination.



## HIGH DENSITY SINGLE COLOR LTP-HD SERIES



### FEATURES

- 1 Bin
- 2 Step MacAdam Ellipse
- 3oz PCB board
- 3M Adhesive
- 50,000 hours life
- High brightness 3528 Epistar LEDs
- Field cuttable
- Low power consumption
- Available in 16' (5m) and 100' (30.48m) spools (custom cuts available)
- 16' spools come with 6Ft pre-soldered power feeds
- Safe, 24V class 2 power supplies (sold separately)
- Fully dimmable with dimmable power supplies (sold separately)
- 6 year limited warranty

### APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

### SPECIFICATIONS

Electrical	24V DC, 5.8 W/ft
LED Type	High Brightness 3528 Epistar LEDs
Viewing Angle	120°
LED Life	50,000 hours to 70% initial lumen output
LED Spacing	4.2mm (0.17")
# of LEDs per foot (304mm)	72
Maximum Single Run	16'
Custom Cuttable	1" (25mm)
Lumen Output	514 Lumens per ft 6500K 468 Lumens per ft 4000K 450 Lumens per ft 3000K
Efficacy	88 LPW 6500K, 80 LPW 4000K, 77 LPW 3000K
Color Temperature	3000K, 4000K, 6500K
CRI	> 90
Approvals	cETLus

### PRODUCT CODES

16Ft spools  
LTP - 16 - **YY** - HD - H90

**LED COLOR**  
3000K  
4000K  
6500K


100Ft spools  
LTP - 100 - **YY** - HD - H90

**LED COLOR**  
3000K  
4000K  
6500K

Custom cuts  
LTP - **XX** - **YY** - HD - H90

**LED COLOR**  
3000K  
4000K  
6500K



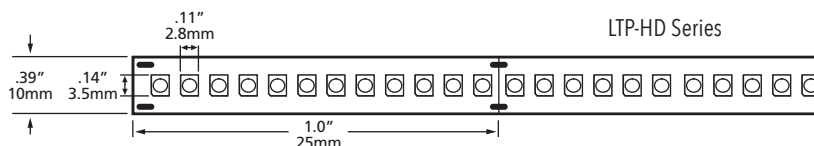


## ACCESSORIES



**LTP-001-HD-HP-6**  
72" Power feed connector for high density indoor



**LMSII-001**  
Terminal block and junction box for connection to additional lengths of power cable if needed



**LTP-010-S**  
Clear PVC mounting "U" channel



**LV-SPIR-1CH-LV**  
PIR Motion Sensor, 1 Channel, 24V DC  
NOTE: To be used with non dimmable drivers only

**NOTE: See page 34-35 for the complete range of aluminum extrusions.**

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE24L40DC

Max recommended load 36W or 6' LED Tape,  
min 8W or 2' LED Tape  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE24L96DC

Max recommended load 90W or 16' LED Tape,  
min 8W or 2' LED Tape  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver  
Max. recommended load 90W or 16' (4.8m) per single tap,  
120W or 20' (6.1m) combined two secondary taps.  
120W hardwire  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

# HIGH DENSITY LED TAPE LIGHT

## Low Power Indoor

Suitable for display cabinets and applications needing lower but even illumination.



### HIGH DENSITY SINGLE COLOR LTP-HD-LP SERIES



#### FEATURES

- 1 Bin
- 2 Step MacAdam Ellipse
- 3oz PCB board
- 3M Adhesive
- 50,000 hours life
- High brightness 3528 Epistar LEDs
- Field cuttable
- Low power consumption
- Available in 16' (5m) and 100' (30.48m) spools (custom cuts available)
- 16' spools come with 6Ft pre-soldered power feeds
- Safe, 24V class 2 power supplies (sold separately)
- Fully dimmable with dimmable power supplies (sold separately)
- 6 year limited warranty

#### APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

#### SPECIFICATIONS

Electrical	24V DC, 2.9 W/ft
LED Type	High Brightness 3528 Epistar LEDs
Viewing Angle	120°
LED Life	50,000 hours to 70% initial lumen output
LED Spacing	8.3mm (0.33")
# of LEDs per foot (304mm)	36
Maximum Single Run	31'
Custom Cuttable	2" (50mm)
Lumen Output	257 Lumens per ft 6500K 234 Lumens per ft 4000K 225 Lumens per ft 3000K
Efficacy	88 LPW 6500K, 80 LPW 4000K, 77 LPW 3000K
Color Temperature	3000K, 4000K, 6500K
CRI	> 90
Approvals	cETLus

#### PRODUCT CODES

16Ft spools  
LTP - 16 - **YY** - HD - LP - H90

**LED COLOR**  
3000K  
4000K  
6500K


100Ft spools  
LTP - 100 - **YY** - HD - LP - H90

**LED COLOR**  
3000K  
4000K  
6500K

Custom cuts  
LTP - **XX** - **YY** - HD - LP - H90

**LED COLOR**  
3000K  
4000K  
6500K



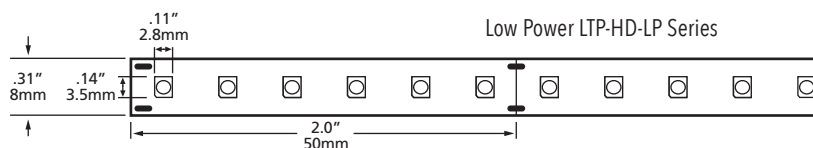

## ACCESSORIES



**LTP-001-HD-6**  
72" Power feed connector for high density indoor.




**LTP-002-HD**  
In-line connector for high density indoor



**LTP-STP-HD-6IN**  
6" In-line connector for high density indoor



**LMSII-001**  
Terminal block and junction box for connection to additional lengths of power cable if needed



**LTP-010-S**  
Clear PVC mounting "U" channel



**LV-SPIR-1CH-LV**  
PIR Motion Sensor, 1 Channel, 24V DC  
NOTE: To be used with non dimmable drivers only

**NOTE:** See page 34-35 for the complete range of aluminum extrusions.

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE24L40DC

Max recommended load 36W or 12' LED Tape,  
min 8W or 3' LED Tape  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE24L96DC

Max recommended load 90W or 31' LED Tape,  
min 8W or 3' LED Tape  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

## NON DIMMABLE DRIVERS


### LEDDR-24-120W

Indoor/Outdoor driver  
Max. recommended load 90W or 31' (9.4m) per single tap,  
120W or 41' (12.5m) combined two secondary taps.  
120W hardwire  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

# LED TAPE LIGHT

## High Efficacy, Indoor

Our highest lumen output for those applications needing high illumination and great color rendering.

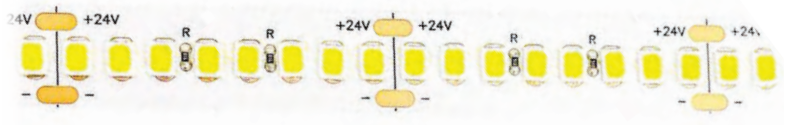

### FEATURES

- 1 Bin
- 2 Step MacAdam Ellipse
- 3oz PCB board
- 3M Adhesive
- 50,000 hours life
- Field cuttable every 1.3"
- Low power consumption
- Available in 16' (5m) and 100' (30.48m) spools (custom cuts available)
- 16' spools come with 6Ft pre-soldered power feeds
- Safe, 24V DC operation
- Fully dimmable with dimmable power supplies (sold separately)
- 6 years limited warranty

### APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

### SPECIFICATIONS

Electrical	24V DC, 5.1W/FT
LED Type	High Brightness 2835 LEDs
Viewing Angle	120°
LED Life	50,000 hours
LED Spacing	4mm (0.16")
# of LEDs per foot	73
Maximum single run	16'
Custom cuttable	33mm (1.3")
Lumen Output	586 Lumens per ft 6500K 540 Lumens per ft 4000K 527 Lumens per ft 3500K 513 Lumens per ft 3000K 508 Lumens per ft 2700K
Efficacy	115 LPW 6500K, 106 LPW 4000K, 103 LPW 3500K, 100LPW 3000K, 99 LPW 2700K
Color Temperature	2700K, 3000K, 3500K, 4000K, 6500K
CRI	>90
Approvals	cETLus

### PRODUCT CODES

16Ft spools

**LTP - 16 - YY - HE - H90**

**LED Tape Light  
High Efficacy,  
Indoor**

**LED COLOR**  
2700K  
3000K  
3500K  
4000K  
6500K

100Ft spools

**LTP - 100 - YY - HE - H90**

**LED Tape Light  
High Efficacy,  
Indoor**


**LED COLOR**  
2700K  
3000K  
3500K  
4000K  
6500K

Custom cuts

**LTP - XX - YY - HE - H90**

**LED Tape Light  
High Efficacy,  
Indoor**

**LED COLOR**  
2700K  
3000K  
3500K  
4000K  
6500K

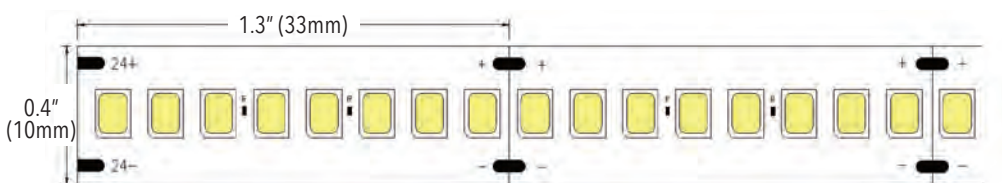


## ACCESSORIES



**LTP-001-HD-HP-6**  
72" Power feed connector  
for high density indoor



**LMSII-001**  
Terminal block and junction  
box for connection to  
additional lengths of power  
cable if needed



**LTP-010-S**  
Clear PVC mounting  
"U" channel



**LV-SPIR-1CH-LV**  
PIR Motion Sensor, 1  
Channel, 24V DC  
NOTE: To be used with non  
dimmable drivers only

**NOTE: See page 34-35 for the complete range of aluminum extrusions.**

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE24L40DC

Max 7' (2.1m)  
Min 8 Watts, 1.5'(0.45m) LED High Efficacy  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE24L96DC

Max 17.6' (5.3m)  
Min 8 Watts, 1.5'(0.45m) LED High Efficacy  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver  
Max 17.6 (5.3m) per single tap  
Max 23' (7m) combined 2 secondary taps  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)



# LED TAPE LIGHT COB, Indoor

Offers both performance and superior even illumination suitable for commercial, retail and residential applications.



## FEATURES

- 1 Bin
- 2 Step MacAdam Ellipse
- 3oz PCB board
- 3M Adhesive
- 50,000 hours life
- Field cuttable every 50mm (2")
- Low power consumption
- Smooth luminance - no hot spots
- Available in 20' (6.1m) and 100' (30.48m) spools (custom cuts available)
- 20' spools come with 6Ft pre-soldered power feeds
- Safe, 24V DC operation
- Fully dimmable with dimmable power supplies (sold separately)
- 6 years limited warranty

## APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

## SPECIFICATIONS

Electrical	24V DC, 4.2W/FT
LED Type	High Brightness LEDs
Viewing Angle	120°
LED Life	50,000 hours
LED Spacing	2mm (0.08")
# of LEDs per foot	91
Maximum single run	20'
Custom cuttable	50mm (2")
Lumen Output	374 Lumens per ft 6500K 336 Lumens per ft 4000K 328 Lumens per ft 3500K 319 Lumens per ft 3000K 315 Lumens per ft 2700K
Efficacy	89 LPW 6500K, 80 LPW 4000K, 78 LPW 3500K, 76 LPW 3000K, 75 LPW 2700K
Color Temperature	2700K, 3000K, 3500K, 4000K, 6500K
CRI	>90 for white color temperatures
Approvals	cETLus

## PRODUCT CODES

20Ft spools

**LTP - 20 - YY - COB - H90**

LED Tape Light  
COB, Indoor

LED COLOR  
2700K  
3000K  
3500K  
4000K  
6500K

**LTP - 20 - YY - COB**

LED COLOR  
**RD** - Red  
**AM** - Amber  
**GR** - Green  
**BL** - Blue

100Ft spools

**LTP - 100 - YY - COB - H90**

LED Tape Light  
COB, Indoor

LED COLOR  
2700K  
3000K  
3500K  
4000K  
6500K

**LTP - 100 - YY - COB**

LED COLOR  
**RD** - Red  
**AM** - Amber  
**GR** - Green  
**BL** - Blue

Custom cuts


**LTP - XX - YY - COB - H90**

LED Tape Light  
COB, Indoor

LED COLOR  
2700K  
3000K  
3500K  
4000K  
6500K

**LTP - XX - YY - COB**

LED COLOR  
**RD** - Red  
**AM** - Amber  
**GR** - Green  
**BL** - Blue

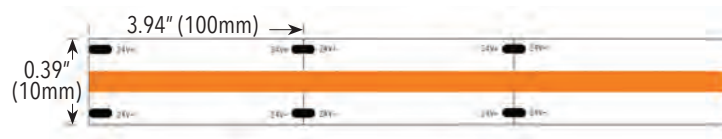


## ACCESSORIES



**LTP-001-HD-HP-6**  
72" Power feed connector  
for high density indoor



**LMSII-001**  
Terminal block and junction  
box for connection to  
additional lengths of power  
cable if needed



**LTP-010-S**  
Clear PVC mounting  
"U" channel



**LV-SPIR-1CH-LV**  
PIR Motion Sensor, 1  
Channel, 24V DC  
NOTE: To be used with non  
dimnable drivers only

**NOTE:** See page 34-35 for the complete range of aluminum extrusions.

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE24L40DC

Max 8.6' (2.6m)  
Min 8 Watts, 1.9'(0.57M) LED COB Tape  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE24L96DC

Max 21.4' (6.5m)  
Min 8 Watts, 1.9'(0.57m) LED COB Tape  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver  
Max 21.4' (6.5m) per single tap  
Max 28' (8.5m) combined 2 secondary taps  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

# LED TAPE LIGHT

## Dim to Warm

Suitable for both hospitality and residential applications creating an inviting atmosphere.



### FEATURES

- 1 Bin
- 2 Step MacAdam Ellipse
- 3oz PCB board
- 3M Adhesive
- 50,000 hours life
- Field cuttable every 50mm (2")
- Low power consumption
- Auto Warm-dim technology
- Available in 16' (5m) and 100' (30.48m) spools (custom cuts available)
- 16' spools come with 6Ft pre-soldered power feeds
- Safe, 24V DC operation
- Dim-to-warm: 1800K to 3000K
- No special controllers required
- 6 years limited warranty

### APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

### PRODUCT CODES

16Ft spools  
LTP - 16 - WW - DIM - H90


100Ft spools  
LTP - 100 - WW - DIM - H90

Custom cuts  
LTP - XX - WW - DIM - H90

### SPECIFICATIONS

Electrical	24V DC, 5.5W/FT
LED Type	Epistar
Viewing Angle	120°
LED Life	50,000 hours
# of LEDs per foot	240
Maximum single run	16'
Custom cuttable	50mm (2")
Lumen Output	449LM/FT
Color Temperature	1800K-3000K
CRI	>90
Approvals	cETLus



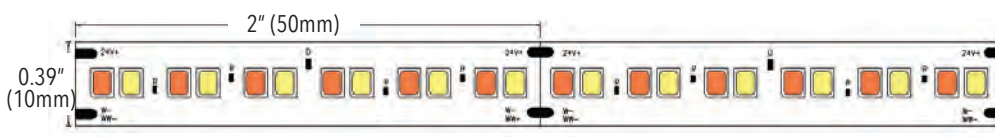


## ACCESSORIES



**LTP-001-HD-HP-6**  
72" Power feed connector  
for high density indoor



**LMSII-001**  
Terminal block and junction  
box for connection to  
additional lengths of power  
cable if needed



**LTP-010-S**  
Clear PVC mounting  
"U" channel

**NOTE:** See page 34-35 for the complete range of aluminum extrusions.

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE24L40DC

Max 6.5' (1.98m)  
Min 8 Watts, 1.45' (0.44m)  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE24L96DC

Max 16' (5m)  
Min 8 Watts, 1.45' (0.44m)  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

## LED TAPE LIGHT

# High Power RGB Indoor

Excellent choice for dynamic environments such as cinemas, retail and hospitality needing higher illumination.



## HIGH POWER RGB LTP-20-RGB SERIES



### FEATURES

- 50,000 hours life
- High brightness 5060 SMD LEDs
- Field cuttable
- Low power consumption
- Available in 20' (6.1m) and 100' (30.48m) spools (custom cuts available)
- 20' spools come with 6 ft. pre-soldered power feeds
- Safe, 24V class 2 power supplies (sold separately)
- Controllers sold separately
- 6 year limited warranty

### APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

### PRODUCT CODES


20Ft spools  
LTP - 20 - RGB

100Ft spools  
LTP - 100 - RGB

Custom cuts  
LTP - XX - RGB

### SPECIFICATIONS

Electrical	24V DC, 4.3W/ft
LED Type	High Brightness 5060 SMD LEDs
Viewing Angle	120°
LED Life	50,000 hours to 70% initial lumen output
LED Spacing	16mm (0.63")
# of LEDs per foot (304mm)	18
Maximum Single Run	20'
Custom Cuttable	4"
Approvals	cETLus

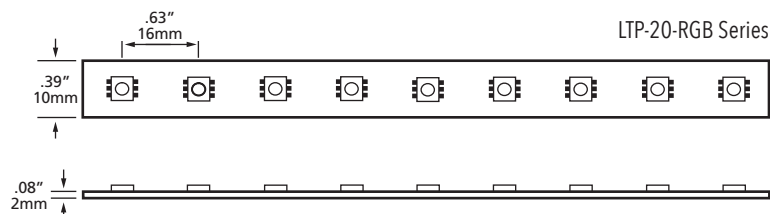

## ACCESSORIES




**LTP-001-RGB-6R**  
72" Power feed connector for RGB indoor. Add "L" for opposite end.



**LTP-002-RGB**  
In-line connector for RGB indoor



**LTP-001-RGB-6IN**  
6" In-line connector for RGB indoor  
**LTP-001-RGB-2IN**  
2" In-line connector for RGB indoor



**LTP-010-S**  
Clear PVC mounting "U" channel



**LT-09S-RF**  
6 Key RGB "touch" controller 12/24V DC



**LN-WIFI-CTRL**  
3 in 1 LED Strip Controller (WiFi+2.4G)



**LN-WIFI-RM**  
4-Zone RGB+CCT Remote



**LT-390A**  
Signal amplifier for RGB

**NOTE:** See page 34-35 for the complete range of aluminum extrusions.

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver

Max. recommended load 90W or 20' (6.1m) per single tap, 120W or 27' (8.23m) combined two secondary taps.

120W hardwire

Input: 100 - 240V AC

Output: 24V DC

10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)



# LED TAPE LIGHT

## Low Power RGB Indoor

For more subtle approaches within entertainment venues and restaurants.



### LOW POWER RGB LTP-20-RGB-LP SERIES



#### FEATURES

- 50,000 hours life
- High brightness 5060 SMD LEDs
- Field cuttable
- Low power consumption
- Available in 20' (6.1m) and 100' (30.48m) spools (custom cuts available)
- 20' spools come with 6 ft. pre-soldered power feeds
- Safe, 24V class 2 power supplies (sold separately)
- 6 year limited warranty

#### APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

#### PRODUCT CODES


20Ft spools  
LTP - 20 - RGB - LP

100Ft spools  
LTP - 100 - RGB - LP

Custom cuts  
LTP - XX - RGB - LP

#### SPECIFICATIONS

Electrical	24V DC, 2.2W/ft
LED Type	High Brightness 5060 SMD LEDs
Viewing Angle	120°
LED Life	50,000 hours to 70% initial lumen output
LED Spacing	32mm (1.26")
# of LEDs per foot (304mm)	9
Maximum Single Run	40'
Custom Cuttable	6.5"
Approvals	cETLus

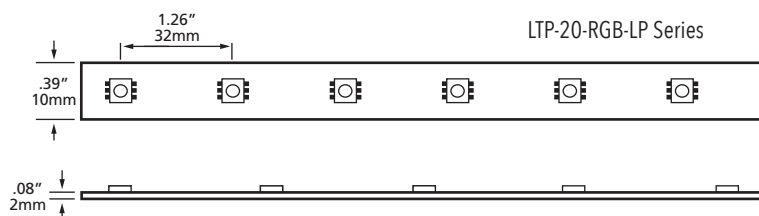

## ACCESSORIES



### LTP-001-RGB-6R

72" Power feed connector for RGB indoor. Add "L" for opposite end.



### LTP-002-RGB

In-line connector for RGB indoor




### LTP-001-RGB-6IN

6" In-line connector for RGB indoor

### LTP-001-RGB-2IN

2" In-line connector for RGB indoor



### LTP-010-S

Clear PVC mounting "U" channel



### LT-09S-RF

6 Key RGB "touch" controller 12/24V DC



### LN-WIFI-CTRL

3 in 1 LED Strip Controller (WiFi+2.4G)



### LN-WIFI-RM

4-Zone RGB+CCT Remote



### LT-390A

Signal amplifier for RGB

**NOTE:** See page 34-35 for the complete range of aluminum extrusions.

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver

Max. recommended load 90W or 40' (12.1m) per single tap, 120W or 54' (16.46m) combined two secondary taps.

120W hardwire

Input: 100 - 240V AC

Output: 24V DC

10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

# LED TAPE LIGHT

## High Power RGBW Indoor

Offers dynamic range of color and dedicated white for greater versatility suitable for all market segments.



### HIGH POWER RGB LTP-20-RGBW SERIES



#### FEATURES

- 50,000 hours life
- High brightness 5050 SMD LEDs
- Field cuttable
- Low power consumption
- Available in 20' (6.1m) and 100' (30.48m) spools (custom cuts available)
- RGB color change plus 3000K, 4000K and 6500K color temperatures
- 20' spools come with 6 ft. pre-soldered power feeds
- Safe, 24V class 2 power supplies (sold separately)
- 6 year limited warranty

#### APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

#### PRODUCT CODES

20Ft spools  
LTP - 20 - RGBYY - H90

##### LED COLOR

3000K  
4000K  
6500K

100Ft spools  
LTP - 100 - RGBYY - H90

##### LED COLOR

3000K  
4000K  
6500K


Custom cuts  
LTP - XX - RGBYY - H90

##### LED COLOR

3000K  
4000K  
6500K

#### SPECIFICATIONS

Electrical	24V DC, 4.3W/ft
LED Type	High Brightness 5050 SMD LEDs
Viewing Angle	120°
LED Life	50,000 hours to 70% initial lumen output
LED Spacing	16mm (0.63")
# of LEDs per foot (304mm)	18
Maximum Single Run	20'
Custom Cuttable	4"
CRI	>90 for white color temperatures
Approvals	cETLus

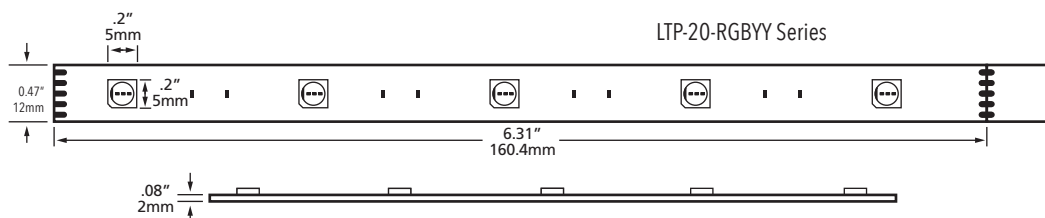

## ACCESSORIES



**LTP-001-RGBW-6**  
72" Power feed connector  
for RGBW indoor  
**LTP-001-RGBW-12**  
144" Power feed connector  
for RGBW indoor



**LTP-002-RGBW**  
In-line connector for RGBW  
indoor



**LTP-001-RGBW-6IN**  
6" In-line connector for  
RGBW indoor



**LT-115-RF**  
RGBW controller



**LT-490A**  
RGBW signal amplifier  
*NOTE: Network cable with  
RJ45 connectors required  
(not supplied)*

**NOTE: See page 34-35 for the complete range of aluminum extrusions.**

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver  
Max. recommended load 90W or 20' (6.1m) per single tap,  
120W or 27' (8.23m) combined two secondary taps.  
120W hardwire  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)



# LED TAPE LIGHT

## CCT Indoor

Where applications demand a greater dynamic range within the White Light Spectrum. Hospitality, retail, residential and commercial.



### CCT COLOR TEMP ADJUST SERIES



#### FEATURES

- 50,000 hours life
- High brightness 3528 SMD LEDs
- Field cuttable
- Low power consumption
- Available in 16' (5M) spools
- 16' spools come with 6 ft. pre-soldered power feeds
- Safe, 24V class 2 power supplies (sold separately)
- Controller sold separately
- 6 year limited warranty

#### APPLICATIONS


- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

#### PRODUCT CODES

LTP - 16 - CCT - H90

#### SPECIFICATIONS

Electrical	24V DC, 5.8W/ft
LED Type	High Brightness 3528 SMD LEDs
Viewing Angle	120°
LED Life	50,000 hours to 70% initial lumen output
LED Spacing	8.3mm (0.33")
# of LEDs per foot (304mm)	36
Maximum Single Run	16'
Lumen Output	383 Lumens per ft 7000K 261 Lumens per ft 3000K
Efficacy	66LPW 7000K 45LPW 3000K
Color Temperature	2500K-7000K
Custom Cuttable	2"
CRI	> 90
Approvals	cETLus

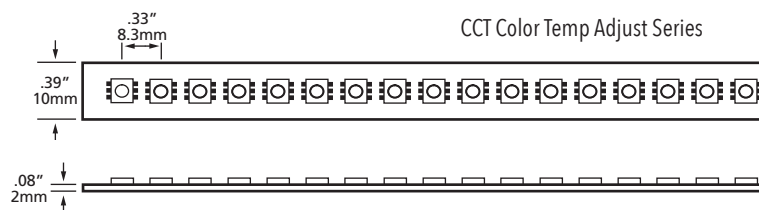

## ACCESSORIES




**LTP-001-CCT-6**  
72" Power feed connector for CCT indoor. Add "-O" for opposite end.



**LTP-002-CCT**  
In-line connector for CCT series indoor



**LTP-STP-CCT-6IN**  
6" (15cm) in line connector



**LTP-010-S**  
Clear PVC mounting "U" channel



**LT-031-RF**  
6 Key CCT Adjustable "touch" controller 12/24V DC



**LT-290A**  
CCT signal amplifier

**NOTE:** See page 34-35 for the complete range of aluminum extrusions.

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver  
16' (4.88m) per single tap, 20' (6.1m) combined two secondary taps.  
120W hardwire  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

# LED TAPE LIGHT

## High Power Outdoor

Exterior rated suitable for those commercial, retail and hospitality applications requiring higher illumination.



### HIGH POWER SINGLE COLOR LTP-OD SERIES



#### FEATURES

- 1 Bin
- 2 Step MacAdam Ellipse
- 3oz PCB board
- 3M Adhesive
- 50,000 hours life
- High brightness 5060 SMD LEDs
- Field cuttable
- Low power consumption
- Available in 20' (6.1m) spools
- Safe, 24V class 2 power supplies (sold separately)
- Fully dimmable with dimmable power supplies (sold separately)
- 6 year limited warranty

#### APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

#### PRODUCT CODES

LTP - OD - 20 - **YY** - H90


#### LED COLOR

2700K  
3000K  
3500K  
4000K  
6500K

#### SPECIFICATIONS

Electrical	24V DC, 4.3W/ft
LED Type	High Brightness 5060 SMD LEDs
Viewing Angle	120°
LED Life	50,000 hours to 70% initial lumen output
LED Spacing	16mm (0.63")
# of LEDs per foot (304mm)	18
Maximum Single Run	20'
Custom Cuttable	4"
Lumen Output	325 Lumens per ft 6500K 300 Lumens per ft 4000K 293 Lumens per ft 3500K 285 Lumens per ft 3000K 280 Lumens per ft 2700K
Efficacy	75 LPW 6500K, 70 LPW 4000K, 68 LPW 3500K, 66 LPW 3000K, 65 LPW 2700K
Color Temperature	2700K, 3000K, 3500K, 4000K, 6500K
CRI	> 90
Approvals	cETLus

NOTE: Outdoor Tape Light comes with liquid-tight connectors pre-installed on both ends, so it is necessary to make the cuts starting from extremities. Cut pieces can be terminated, but not joined together.

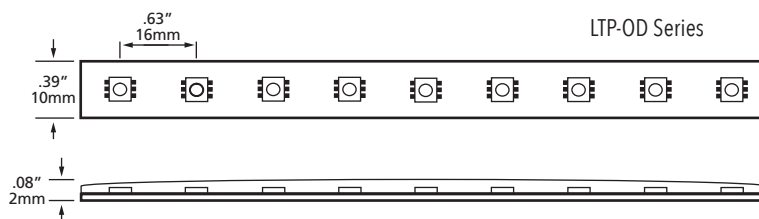

## ACCESSORIES




**LTP-001-OD-6FT**  
72" Power feed connector  
for single color outdoor



**LV-FS-MC-004**  
Mounting clips



**LV-FS-EC-001**  
End caps



**LTP-010-S**  
Clear PVC mounting  
"U" channel

**NOTE:** See page 34-35 for the complete range of aluminum extrusions.

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE24L40DC

Max recommended load 36W or 8' LED Tape,  
min 8W or 2' LED Tape  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE24L96DC

Max recommended load 90W or 20' LED Tape,  
min 8W or 2' LED Tape  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

NOTE: For outdoor installations, please add E-KO-SR strain relief (2pcs/driver).

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver  
Max. recommended load 90W or 20' (6.1m) per single tap,  
120W or 27' (8.23m) combined two secondary taps.  
120W hardwire  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

# LED TAPE LIGHT

## Low Power Outdoor

This exterior rated tape offers more subtle illumination approach for commercial, hospitality and residential use.



### LOW POWER SINGLE COLOR LTP-OD-LP SERIES



#### FEATURES

- 1 Bin
- 2 Step MacAdam Ellipse
- 3oz PCB board
- 3M Adhesive
- 50,000 hours life
- High brightness 5060 SMD LEDs
- Field cuttable
- Low power consumption
- Available in 20' (6.1m) spools
- Safe, 24V class 2 power supplies (sold separately)
- Fully dimmable with dimmable power supplies (sold separately)
- 6 year limited warranty

#### APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

#### PRODUCT CODES

LTP - OD - 20 - **YY** - LP - H90

#### LED COLOR


2700K  
3000K  
3500K  
4000K  
6500K

#### SPECIFICATIONS

Electrical	24V DC, 2.2W/ft
LED Type	High Brightness 5060 SMD LEDs
Viewing Angle	120°
LED Life	50,000 hours to 70% initial lumen output
LED Spacing	32mm (1.26")
# of LEDs per foot (304mm)	9
Maximum Single Run	40'
Custom Cuttable	2.6"
Lumen Output	165 Lumens per ft 6500K 150 Lumens per ft 4000K 148 Lumens per ft 3500K 145 Lumens per ft 3000K 143 Lumens per ft 2700K
Efficacy	75 LPW 6500K, 68 LPW 4000K, 67 LPW 3500K, 66 LPW 3000K, 65 LPW 2700K
Color Temperature	2700K, 3000K, 3500K, 4000K, 6500K
CRI	> 90
Approvals	cETLus

NOTE: Outdoor Tape Light comes with liquid-tight connectors pre-installed on both ends, so it is necessary to make the cuts starting from extremities. Cut pieces can be terminated, but not joined together.



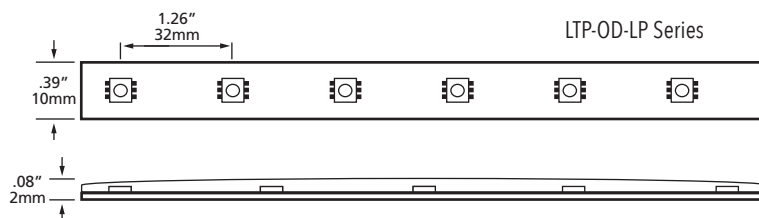


## ACCESSORIES



**LTP-001-OD-6FT**  
72" Power feed connector  
for single color outdoor



**LV-FS-MC-004**  
Mounting clips



**LV-FS-EC-001**  
End caps



**LTP-010-S**  
Clear PVC mounting  
"U" channel

**NOTE:** See page 34-35 for the complete range of aluminum extrusions.

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE24L40DC

Max recommended load 36W or 16' LED Tape,  
min 8W or 2' LED Tape  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE24L96DC

Max recommended load 90W or 40' LED Tape,  
min 8W or 2' LED Tape  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

NOTE: For outdoor installations, please add E-KO-SR strain relief (2pcs/driver).

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver  
Max. recommended load 90W or 40' (12.1m) per single tap,  
120W or 54' (16.46m) combined two secondary taps.  
120W hardwire  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

# LED TAPE LIGHT

## High Power RGB Outdoor

Great for enhancing outdoor spaces with a dynamic look. Suitable for hospitality, retail and commercial environments.



### HIGH POWER RGB OUTDOOR LTP-OD-RGB SERIES



#### FEATURES

- 50,000 hours life
- High brightness 5060 SMD LEDs
- Field cuttable
- Low power consumption
- Available in 20' (6.1m) spools
- Safe, 24V class 2 power supplies (sold separately)
- 6 year limited warranty

#### APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting


#### PRODUCT CODES

LTP - OD - 20 - RGB

#### SPECIFICATIONS

Electrical	24V DC, 4.3W/ft
LED Type	High Brightness 5060 SMD LEDs
Viewing Angle	120°
LED Life	50,000 hours to 70% initial lumen output
LED Spacing	16mm (0.63")
# of LEDs per foot (304mm)	18
Maximum Single Run	20'
Custom Cuttable	4"
Approvals	cETLus

NOTE: Outdoor Tape Light comes with liquid-tight connectors pre-installed on both ends, so it is necessary to make the cuts starting from extremities. Cut pieces can be terminated, but not joined together.

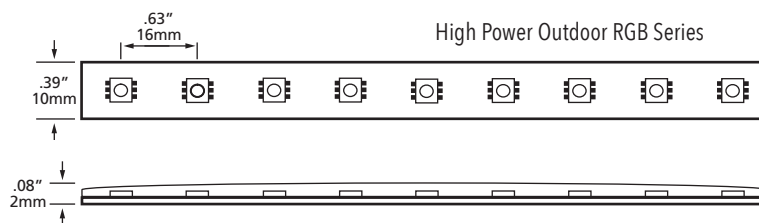

## ACCESSORIES




**LTP-RGB-001-OD-6FT**  
72" Power feed connector  
for RGB outdoor



**LV-FS-MC-004**  
Mounting clips



**LV-FS-EC-001**  
End caps



**LTP-010-S**  
Clear PVC mounting  
"U" channel



**LT-09S-RF**  
6 Key RGB "touch" controller  
12/24V DC



**LN-WIFI-CTRL**  
3 in 1 LED Strip Controller  
(WiFi+2.4G)



**LN-WIFI-RM**  
4-Zone RGB+CCT Remote



**LV-ZJFFS-3CH-6INW**  
Outdoor RGB signal  
amplifier

**NOTE: See page 34-35 for the complete range of aluminum extrusions.**

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver

Max. recommended load 90W or 20' (6.1m) per single tap,  
120W or 27' (8.23m) combined two secondary taps.

120W hardwire

Input: 100 - 240V AC

Output: 24V DC

10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

# LED TAPE LIGHT

## Low Power RGB Outdoor

For those exterior applications requiring a dynamic but subtle approach. Suitable for residential, hospitality, commercial and retail.



### LOW POWER RGB LTP-OD-RGB-LP SERIES



#### FEATURES

- 50,000 hours life
- High brightness 5060 SMD LEDs
- Field cuttable
- Low power consumption
- Available in 20' (6.1m) spools
- Safe, 24V class 2 power supplies (sold separately)
- 6 year limited warranty

#### APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting


#### PRODUCT CODES

LTP - OD - 20 - RGB - LP

#### SPECIFICATIONS

Electrical	24V DC, 2.2 W/ft
LED Type	High Brightness 5060 SMD LEDs
Viewing Angle	120°
LED Life	50,000 hours to 70% initial lumen output
LED Spacing	32mm (1.26")
# of LEDs per foot (304mm)	9
Maximum Single Run	40'
Custom Cuttable	6.5"
Approvals	cETLus

NOTE: Outdoor Tape Light comes with liquid-tight connectors pre-installed on both ends, so it is necessary to make the cuts starting from extremities. Cut pieces can be terminated, but not joined together.

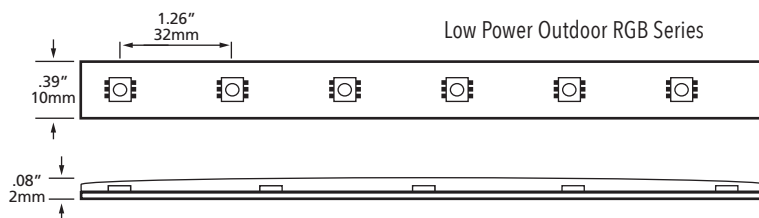

## ACCESSORIES




**LTP-RGB-001-OD-6FT**  
72" Power feed connector  
for RGB outdoor



**LV-FS-MC-004**  
Mounting clips



**LV-FS-EC-001**  
End caps



**LTP-010-S**  
Clear PVC mounting  
"U" channel



**LT-09S-RF**  
6 Key RGB "touch" controller  
12/24V DC



**LN-WIFI-CTRL**  
3 in 1 LED Strip Controller  
(WiFi+2.4G)



**LN-WIFI-RM**  
4-Zone RGB+CCT Remote



**LV-ZJFFS-3CH-6INW**  
Outdoor RGB signal  
amplifier

**NOTE:** See page 34-35 for the complete range of aluminum extrusions.

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver

Max. recommended load 90W or 40' (12.1m) per single tap,  
120W or 54' (16.46m) combined two secondary taps.

120W hardwire

Input: 100 - 240V AC

Output: 24V DC

10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)



# LED Tape Light Extrusions

## LV-LB-D3-FR

Surface mount aluminum extrusion and frosted PC cover




### End Caps

LV-D1/D3-EC (2/bag)  
LV-D1/D3-EC-WF (2/bag)

### Mounting Clips

LV-D1/D3-MC (6/bag)



NOTE: available in 1M (39") and 2M (78") lengths.

## LV-ALP2208

Surface mount aluminum extrusion and frosted PC cover




### End Caps

LV-ALP2208-EC (2/bag)  
LV-ALP2208-EC-WF (2/bag)

### Mounting Clips

LV-ALP2208-MC (2/bag)

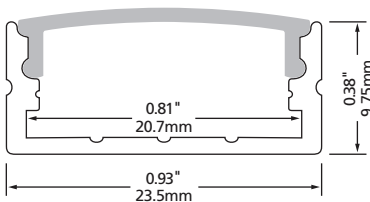

NOTE: available in 1M (39") and 2M (78") lengths.

## LV-ALP007

Surface mount aluminum extrusion and frosted PC cover




### End Caps

LV-ALP007-EC (2/bag)  
LV-ALP007-EC-WF (2/bag)

### Mounting Clips


LV-ALP007-MC (6/bag)

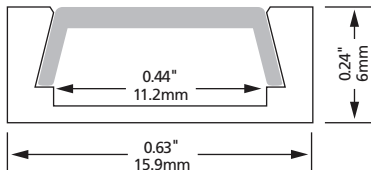

NOTE: available in 1M (39") and 2M (78") lengths.

## LV-LB-V3-FR

Corner surface mounted aluminum extrusion and frosted PC cover




### End Caps

LV-V1/V3-EC (2/bag)  
LV-V1/V3-EC-WF (2/bag)

### Mounting Clips

LV-V1/V3-MC (6/bag)



NOTE: available in 1M (39") lengths.

### LV-LB-W3-FR

Recessed aluminum extrusion and frosted PC cover




#### End Caps

LV-W1/W3-EC (2/bag)  
LV-W1/W3-EC-WF (2/bag)

#### Mounting Clips

LV-W1/W3-MC (6/bag)

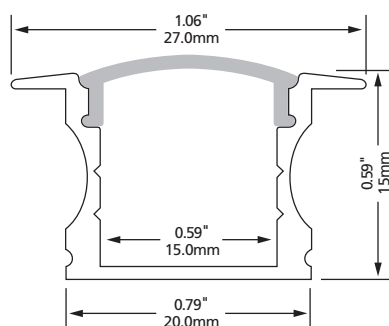

NOTE: available in 1M (39") lengths.

### LV-ALP2908

Recessed aluminum extrusion and frosted PC cover




#### End Caps

LV-ALP2908-EC (2/bag)  
LV-ALP2908-EC-WF (2/bag)

#### Mounting Clips


LV-ALP2908-MC (2/bag)

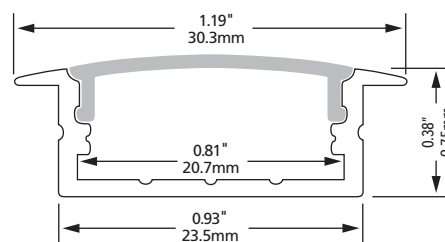

NOTE: available in 1M (39") lengths.

### LV-1401

Closet aluminum extrusion with mounting brackets and frosted PC cover

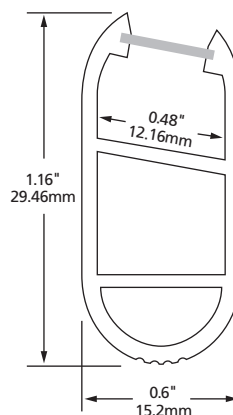

1M (39") extrusion ships complete with two mounting end caps and one support bracket

# LED eStrip

LED eStrip is our most versatile linear lighting product. Now with 3014 type LEDs, LED eSTRIP is brighter and better than ever!



## FEATURES

- 40,000 hours life
- Safe low voltage (24V)
- Virtually maintenance free
- Ultra low power consumption
- Available in 90' spools (custom cuts available)
- Crushproof to 100psi
- Field cuttable
- Inter-connectable
- Highly flexible (min. bend radius 1.5")
- Indoor/outdoor use
- Impact resistant
- Six brilliant colors
- Dimmable
- 2 year limited warranty

## APPLICATIONS

- Building outlines
- Coves
- Stairway and aisle lighting
- Signage
- Backlit panels
- Decks
- Edgelit glow
- Emergency lighting
- Pathway lighting
- Billboards
- Highlighting architectural features
- Over/Under cabinets

## PRODUCT CODES

90Ft spools

**LES - 90 - YY**

**LED eSTRIP**

**LED COLOR**

- 3000K
- 5800K
- AM** - Amber
- BL** - Blue
- GR** - Green
- RD** - Red

Custom cuts

**LES - XX - YY**


**LED eSTRIP**

**LED COLOR**

- 3000K
- 5800K
- AM** - Amber
- BL** - Blue
- GR** - Green
- RD** - Red

## SPECIFICATIONS

Electrical	24V DC, 0.96W/ft
Viewing Angle	120°
LED Life	40,000 hours
LED Spacing	1" (25.4mm)
Maximum Length	90' (27.4m)
Custom Cuttable	6" (152.4mm)
Lumen Output	61 Lumens per ft. 5800K 55 Lumens per ft. 3000K
LED Colors	Amber, Red, Blue, Green, 5800K, 3000K
Min/Max Surface Temperature for Mounting	-40°C - 40°C (-40°F - 104°F)
PVC Body Color	Clear
Dimensions	.25" X .5" (6mm x 12mm)
Approvals	cETLus

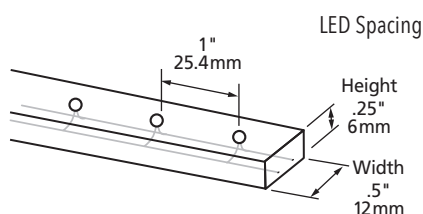

## ACCESSORIES



### LES-001-6BR

Outdoor 6' Power connector for burial connections, 1/4" x 1/2" (6mm x 12mm) Comes with end cap

### LES-001-6CL

Indoor 6' Power connector for through wall connections



### LES-001-12BR

Outdoor Power connector, with SJTW-2 12 ft wires for burial connections, 1/4" x 1/2" (6mm x 12mm) Comes with end cap

### LES-001-12CL

Indoor 12' Power connector for through wall connections



### LES-STP-2BR

Outdoor 2' Step cord for burial connections

### LES-STP-2CL

Indoor 2' Step cord (shown) for through wall connections



### LES-STP-12BR

Outdoor 12' Step cord (shown) for burial connections

### LES-STP-12CL

Indoor 12' Step cord for through wall connections



### LES-FLEX-BR

Outdoor Step cord for burial connections

### LES-FLEX-CL

Indoor Step cord (shown) for through wall connections



### LMSII-001

Terminal block and junction box for connection to additional lengths of power cable if needed



### LES-BFLN

L type connector, 1/4" X 1/2" (6mm x 12mm)



### LES-002

In-Line connector set, male and female, 1/4" X 1/2" (6mm x 12mm)



### LES-BFTD

T type connector, 1/4" X 1/2" (6 x 12mm), male connector in bottom



### LES-003-2

Cutting end cap, 0.25" X 0.5" (6mm x 12mm)

### LES-003-3

Molded end cap (not shown)



### LES-BFTR

T type connector, 1/4" X 1/2" (6 x 12mm), male connector in right or left



### LES-005

Wood nail clips, 1/4" X 1/2" (6mm x 12mm)




### LES-008

Tie wrap and mounting saddle



### LES-BFXN

X type connector, 1/4" X 1/2" (6mm x 12mm)



### LES-BFDN

6 x 12mm (0.25" x 0.5") splice kit (pins, pad and shrink tube)



### LES-010

4' plastic mounting channel, indoor use

### LES-010-S

Predrilled with screws

### LES-010-T

With double sided tape



### NN-C10-POLY

For outdoor use

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE24L40DC

Max 37.5' (11.4m)  
Min 8 Watts, 9' LED eStrip (2.7m)  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE24L96DC

Max 90' (27.4m)  
Min 8 Watts, 9' LED eStrip (2.7m)  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

NOTE: For outdoor installations, please add E-KO-SR strain relief (2pcs/driver).

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver  
Max 90' (27.4m) per single tap  
Max 120' (36.5m) combined  
2 secondary taps  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

### LES-24-65W

Indoor Plug In Driver  
Input: 100-240V AC  
Output: 24V DC  
4.7" x 2" x 1.3" (119.4 x 50.8 x 33mm)

# High Power LED eStrip

New High Power eStrip with twice the lumen output of our regular eSTRIP!



## FEATURES

- 40,000 hours life
- Safe low voltage (24V)
- Virtually maintenance free
- Ultra low power consumption
- Available in 40' spools (custom cuts available)
- Crushproof to 100psi
- Field cuttable
- Inter-connectable
- Highly flexible (min. bend radius 1.5")
- Indoor/outdoor use
- Impact resistant
- Dimmable
- 2 year limited warranty

## APPLICATIONS

- Building outlines
- Coves
- Stairway and aisle lighting
- Signage
- Backlit panels
- Decks
- Edgelit glow
- Emergency lighting
- Pathway lighting
- Billboards
- Highlighting architectural features
- Over/Under cabinets

## PRODUCT CODES

40Ft spools

**LESHP - 40 - YY**

HIGH POWER  
LED eStrip

LED COLOR  
3000K  
5800K

Custom cuts

**LESHP - XX - YY**


HIGH POWER  
LED eStrip

LED COLOR  
3000K  
5800K

## SPECIFICATIONS

Electrical	24V DC, 2.2W/ft
Viewing Angle	120°
LED Life	40,000 hours
LED Spacing	1" (25.4mm)
Maximum Length	40' (12m)
Custom Cuttable	6" (152.4mm)
Lumen Output	155 Lumens per ft. 5800K 137 Lumens per ft. 3000K
LED Colors	5800K, 3000K
Min/Max Surface Temperature for Mounting	-40°C - 40°C (-40°F - 104°F)
PVC Body Color	Clear
Dimensions	.25" X .5" (6mm x 12mm)
Approvals	cETLus



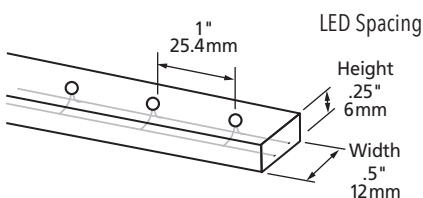

## ACCESSORIES



### LES-001-6BR

Outdoor 6' Power connector for burial connections, 1/4" x 1/2" (6mm x 12mm) Comes with end cap  
**LES-001-6CL**  
Indoor 6' Power connector for through wall connections



### LES-001-12BR

Outdoor Power connector, with SJTW-2 12 ft wires for burial connections, 1/4" x 1/2" (6mm x 12mm) Comes with end cap  
**LES-001-12CL**  
Indoor 12' Power connector for through wall connections



### LES-STP-2BR

Outdoor 2' Step cord for burial connections  
**LES-STP-2CL**  
Indoor 2' Step cord (shown) for through wall connections



### LES-STP-12BR

Outdoor 12' Step cord (shown) for burial connections  
**LES-STP-12CL**  
Indoor 12' Step cord for through wall connections



### LES-FLEX-BR

Outdoor Step cord for burial connections  
**LES-FLEX-CL**  
Indoor Step cord (shown) for through wall connections



### LMSII-001

Terminal block and junction box for connection to additional lengths of power cable if needed



### LES-BFLN

L type connector, 1/4" X 1/2" (6mm x 12mm)



### LES-002

In-Line connector set, male and female, 1/4" X 1/2" (6mm x 12mm)



### LES-BFTD

T type connector, 1/4" X 1/2" (6 x 12mm), male connector in bottom



### LES-003-2

Cutting end cap, 0.25" X 0.5" (6mm x 12mm)  
**LES-003-3**  
Molded end cap (not shown)



### LES-BFTR

T type connector, 1/4" X 1/2" (6 x 12mm), male connector in right or left



### LES-005

Wood nail clips, 1/4" X 1/2" (6mm x 12mm)



### LES-008

Tie wrap and mounting saddle



### LES-BFXN

X type connector, 1/4" X 1/2" (6mm x 12mm)



### LES-BFDN

6 x 12mm (0.25" x 0.5") splice kit (pins, pad and shrink tube)



### LES-010

4' plastic mounting channel, indoor use  
**LES-010-S**  
Predrilled with screws  
**LES-010-T**  
With double sided tape



### NN-C10-POLY

For outdoor use

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE24L40DC

Max 16' (4.87m)  
Min 8 Watts, 4' LED eStrip (1.2m)  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE24L96DC

Max 40' (12.1m)  
Min 8 Watts, 4' LED eStrip (1.2m)  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

NOTE: For outdoor installations, please add E-KO-SR strain relief (2pcs/driver)

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver  
Max 40' (12m) per single tap  
Max 54' (16.4m) combined  
2 secondary taps  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

### LES-24-65W

Indoor Plug In Driver  
Input: 100-240V AC  
Output: 24V DC  
4.7" x 2" x 1.3" (119.4 x 50.8 x 33mm)

# RGB LED eStrip

RGB eSTRIP utilizes RGB LEDs allowing you to produce dramatic color change effects for building outlines, architectural features or anywhere eye catching color changing display lighting is needed.



## FEATURES

- 40,000 hours life
- Safe low voltage (24V)
- Virtually maintenance free
- Ultra low power consumption
- Available in 40' spools (custom cuts available)
- Crushproof to 100psi
- Field cuttable
- Inter-connectable
- Highly flexible (min. bend radius 1.5")
- Indoor/outdoor use
- Impact resistant
- Dimmable
- 2 year limited warranty

## APPLICATIONS

- Building outlines
- Coves
- Stairway and aisle lighting
- Signage
- Backlit panels
- Decks
- Edgelit glow
- Emergency lighting
- Pathway lighting
- Billboards
- Highlighting architectural features
- Over/Under cabinets

## PRODUCT CODES


40Ft spools  
**LES - 40** - RGB

Custom cuts  
**LES - XX** - RGB

NOTE: Sold in 2ft. increments

## SPECIFICATIONS

Electrical	24V DC, 2.2W/ft
Viewing Angle	120°
LED Life	40,000 hours
LED Spacing	1.3" (33mm)
Maximum Length	40' (12m)
Custom Cuttable	8" (198mm)
LED Colors	RGB
Min/Max Surface Temperature for Mounting	-40°C - 40°C (-40°F - 104°F)
PVC Body Color	Clear
Dimensions	.3" X .6" (7.6mm x 15mm)
Approvals	cETLus

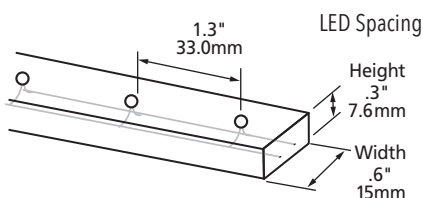

## ACCESSORIES



**LES-BTFN**  
Female connector



**LES-BTMN**  
Male connector



**LES-BTSN**  
In line connector



**LES-BTMCJ-1.5**  
1.5' Power connector



**LES-BTMCJ-6**  
6' Power connector



**LES-BTMC-G4-SI**  
Signal in connector for  
RGB eStrip connection to  
outdoor signal amplifier



**LES-BTMC-G4-SO**  
Signal out connector for RGB  
eStrip connection to outdoor  
signal amplifier



**LES-001-OD-6FT**  
Power feed connector for  
connection to outdoor  
signal amplifier



**LES-STCN**  
Cutting end cap



**LES-STFN**  
Female end cap



**LES-STPV-T**  
Clear PVC mounting  
"U" channel (1M)



**LES-SNPT**  
Wood nail clips,  
1/4" X 1/2" (6mm x 12mm)



**LES-C-6**  
Tie wrap



**LES-MX-1**  
Allen key



**TCJ-E06**  
6' (1.8m) Extension cord  
**TCJ-E30**  
30' (9.1m) Extension cord



**LES-TCJ-EI6-N**  
LED RGB eStrip 6" Flex  
Connector



**LT-09S-RF**  
6 Key RGB "touch"  
controller 12/24V DC



**LN-WIFI-CTRL**  
3 in 1 LED Strip Controller  
(WiFi+2.4G)



**LN-WIFI-RM**  
4-Zone RGB+CCT Remote



**LV-ZJFFS-3CH-6INW**  
Outdoor RGB signal  
amplifier


## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver  
Max 40' (12.1m) per single tap  
Max 54' (16.46m) combined 2 secondary taps  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

# LED Neon Flex

LED Neon Flex is a functional, flexible option to highlight architectural and design elements while adding color and vibrancy to building exteriors.

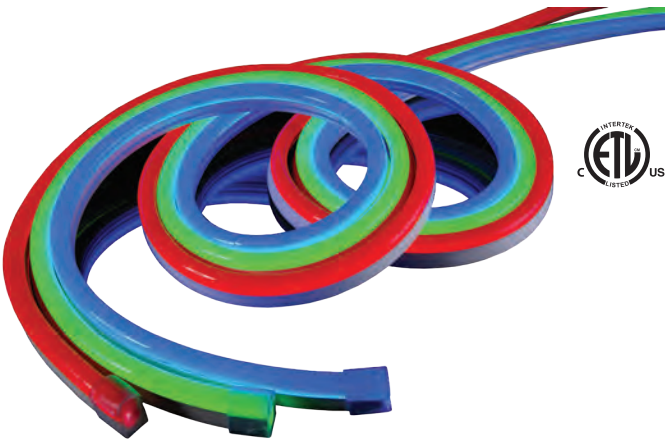

## FEATURES

- Virtually maintenance free
- Low power consumption
- Safe 24V DC operation
- cETLus certified
- Dimmable
- Inter-connectable
- Field cuttable (every 4" single color, every 12" RGB)
- Custom cuts available
- Available in seven brilliant colors, and RGB
- Highly flexible, with neon look
- Indoor/outdoor use
- 30,000 hour life
- 3 year limited warranty

## APPLICATIONS

- Building outlines
- Stairway and aisle lighting
- Signs
- Decks
- Pathway lighting
- Billboards
- Highlighting architectural features

## PRODUCT CODES



**NFLX - 40 - XX**  
**NFLX - XX - YY**



**LED Neon Flex**   **LENGTH**   **Color**  
3000K  
4000K  
6000K  
**RD** - Red  
**GR** - Green  
**BL** - Blue  
**AM** - Amber  
**RGB** - RGB

## SPECIFICATIONS

Electrical	24V DC, 2.44 W/FT (8W/M)
Viewing Angle	120°
Lumen Output	61 LM/FT (200LM/M)
Efficacy	25 LPW
Custom Cuttable	4" single color, 12" RGB
Maximum Length	40FT (12M)
Operating Temperature	-20°C - 40°C (-4F - 104F)
LED Life (hours)	30,000
Beam angle	120°
Color Rendering Index	>80
Dimmable	Yes
Approvals	cETLus

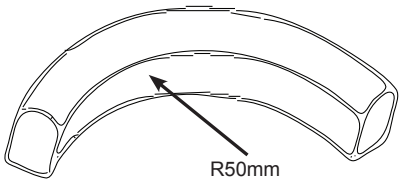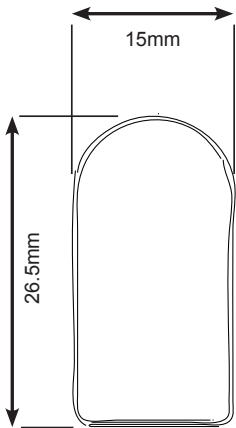

## SINGLE COLOR ACCESSORIES



**NFLX-CONKIT-6FT**  
Power feed connector, 6FT



**NFLX-JUMP**  
Jumper connector, 15CM [6in]



**NFLX-PINS**  
Single color pins



**NFLX-SPLICE**  
In-line splice connector



**NFLX-L-SPLICE**  
L splice connector



**NFLX-T-SPLICE**  
T splice connector



**NFLX-ENDS**  
End cap



**NFLX-CLIPS**  
Mounting clips



**NFLX-CHANNEL**  
Aluminum mounting channel 1M [3.28FT]



**NFLX-GLUE**  
Silicone Glue

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE24L40DC

Max 14.5' (4.4m)  
Min 8 Watts, 3.3'(1m) LED Neon Flex  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE24L96DC

Max 40' (12m)  
Min 8 Watts, 3.3'(1m) LED Neon Flex  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

NOTE: For outdoor installations, please add E-KO-SR strain relief (2pcs/driver)

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver  
Max 40' (12m) per single tap  
Max 48' (14.6m) combined 2 secondary taps  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

## RGB ACCESSORIES



**NFLX-RGB-CONTROL**  
RGB controller



**NFLX-RGB-AMP**  
RGB signal amplifier



**NFLX-RGB-CONKIT-6FT**  
RGB power feed connector, 6FT



**NFLX-RGB-CONKIT-6FT-0**  
RGB power feed connector, 6FT, opposite



**NFLX-RGB-JUMP**  
RGB Jumper connector 15cm [6in]



**NFLX-RGB-PINS**  
RGB pins



**NFLX-ENDS**  
End cap



**NFLX-CLIPS**  
Mounting clips



**NFLX-CHANNEL**  
Aluminum mounting channel 1M [3.28FT]



**NFLX-GLUE**  
Silicone Glue

## NON DIMMABLE DRIVERS (FOR RGB NEON FLEX)

### LEDDR-24-120W

Indoor/Outdoor driver  
Max 40' (12m) per single tap  
Max 48' (14.6m) combined 2 secondary taps  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

# LED Globe Light

LED Globe Light is a Marquee style decorative string light designed for the toughest of weather conditions.



## FEATURES


- 50,000 hours life
- Low power consumption
- Safe class 2, 24V power supply
- Field cuttable
- Multiple lamp spacings available
- Durable construction for indoor and outdoor use
- 2 year limited warranty

## APPLICATIONS

- Building outlines
- String across patios, walk ways, streets and public areas
- Under soffits
- Bridges
- Architectural features
- Window decorations
- Decks and patios

## PRODUCT CODES

### MGST - 12 - Y




## SPECIFICATIONS

Electrical	24V DC, .5W
Wiring	Directly wired to class 2, 24V power supply
Cable	PVC black SPT2, 16AWG outdoor rated
LED Life	50,000 hours
Maximum length	150' (45.6M) Not to exceed 180 lamps
Lumen Output	50 Lumens
Efficacy	100 Lumens per Watt
CRI	> 80
LED Colors	6000K, 2700K Red, Blue, Green and Amber also available upon request
Operating Temperature	-25°C to 65°C
Approvals	cETLus

## GLOBE LIGHT ASSEMBLY PRODUCT CODES


### MGST - Y



## OUTDOOR RATED CABLE

for attaching Globe Light Lamp Assemblies  
**ST16W**



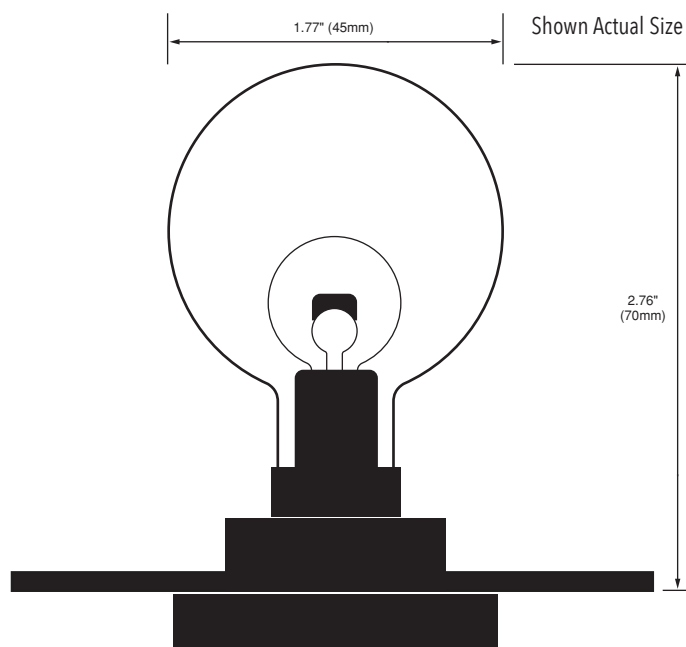

## ACCESSORIES



**MGST-XX-LAMP**  
Replacement lamp



**MGEC**  
End cap for wire (Bag of 10)



**MGNC**  
Wood nail mounting clip



**MGWC**  
Tie wrap for mounting to wire

**ST16W**  
Outdoor rated cable for DIY mounting of LED Globe Light

**MGTP**  
Double sided tape (Bag of 50 pieces)

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE24L40DC

Min 8 Watts, 16 Globes  
Max number of Globes = 80  
40 Watts  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE24L96DC

Min 8 Watts, 16 Globes  
Max number of Globes = 180  
96 Watts  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver  
Max number of Globes = 180\*  
120W hardwire  
Input: 100 - 240V AC  
Output: 24V DC  
120 Watts  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

\* 180 on a single tap or 200 combined two secondary taps.

# LED Wedge Light

LED Wedge Light is a robust all-weather product, ideal for building outlines and other decorative lighting applications.



## FEATURES

- 50,000 hours life
- Low power consumption
- Safe class 2, 12V power supply
- Field cuttable
- Multiple lamp spacings available
- Durable construction for indoor and outdoor use
- Available in Cool White and Warm White
- Optional Red, Blue, Green & Amber LEDs are also available
- 2 year limited warranty

## APPLICATIONS


- Building outlines
- Under soffits
- Bridges
- Architectural features
- Coves
- Window decorations
- Decks and patios

## SPECIFICATIONS

Electrical	12V DC, .25W
Wiring	Directly wired to class 2, 12V power supply
Cable	PVC black SPT2, 16AWG outdoor rated
LED Life	50,000 hours
Maximum length	150' (45.6M) Not to exceed 200 lamps
Lumen Output	15 Lumens
Efficacy	60 Lumens per Watt
CRI	> 80
LED Colors	6000K, 2700K Red, Blue, Green and Amber also available upon request
Operating Temperature	-25°C to 65°C
Approvals	cETLus


## PRODUCT CODES


### MGWL - 06 - Y



## WEDGE LIGHT ASSEMBLY PRODUCT CODES

### MGWL - Y



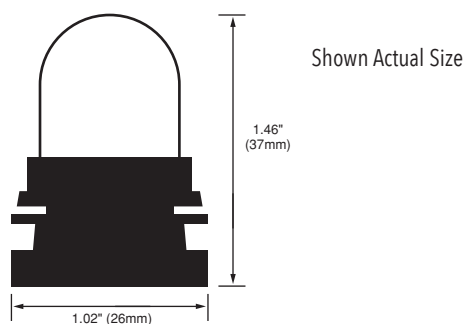

## ACCESSORIES



**MGWL-XX-LAMP**  
Replacement Lamp



**MGEC**  
End cap for wire (Bag of 10)



**MGNC**  
Wood nail mounting clip



**MGWC**  
Tie wrap for mounting to wire

**ST16W**  
Outdoor rated cable for DIY mounting of LED Wedge Light

**MGTP**  
Double sided tape (Bag of 50 pieces)

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE12L20DC

Min 8 Watts, 32 Wedges  
Max number of Wedges = 80  
20 Watts  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE12L60DC

Min 8 Watts, 32 Wedges  
Max number of Wedges = 200  
60 Watts  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

## NON DIMMABLE DRIVERS

### LEDDR-12-60W

Indoor/Outdoor driver  
Max number of Wedges = 200  
60W hardwire  
Input: 100 - 240V AC  
Output: 12V DC  
9 11/16" x 2 9/16" x 2 1/16" (246 x 65 x 52mm)

For outdoor installations, please add E-KO-SR strain relief.

# Gen II LED Hard Strip

Gen II LED Hard Strip is a new and improved energy efficient linkable strip, that provides a smooth, even lighting, eliminating any hot spots. Encased in an aluminum casing, the LED's are cool to the touch and provide 120° beam spread. Available in 4 sizes.



## FEATURES

- 50,000 hours life
- Use high brightness 0.5W Epistar LEDs as lighting source
- Even light distribution with 120° viewing angle
- 24V DC
- 4 sizes – 11.8" (300mm), 19.7" (500mm), 39.4" (1000mm), 47.3" (1200mm)
- Convenient connector between two strips
- Diffused frosted lens to reduce glare
- Temperature rating: -35C - 50C
- 3 year limited warranty

## APPLICATIONS

- Under Counter
- Display Cases
- Cabinet Interiors
- Work Stations
- Linear interior decorative lighting




## SPECIFICATIONS

	LV-HS-PD20-24V-30-XX*	LV-HS-PD20-24V-50-XX*	LV-HS-PD20-24V-100-XX*	LV-HS-PD20-24V-120-XX*
Input Voltage (V DC)	24			
Power per strip	4W	7W	13W	16W
LED Qty. per strip	36	60	132	156
Lumens (lm)				
NW	400	664	1066	1150
WW	380	621	1036	1100
Color Temperature				
WW	3000K +/- 200K	3000K +/- 200K	3000K +/- 200K	3000K +/- 200K
NW	4200K +/- 200K	4200K +/- 200K	4200K +/- 200K	4200K +/- 200K
Viewing Angle	120°			
Lens	Frosted			
Size	11.8" (300mm)	19.7" (500mm)	39.4" (1000mm)	47.3" (1200mm)


\*XX = LED color: WW = 3000K, NW = 4200K


**Note:** Each Hard Strip bar ships with 2pcs of 0° mounting clips.

## MOUNTING OPTIONS

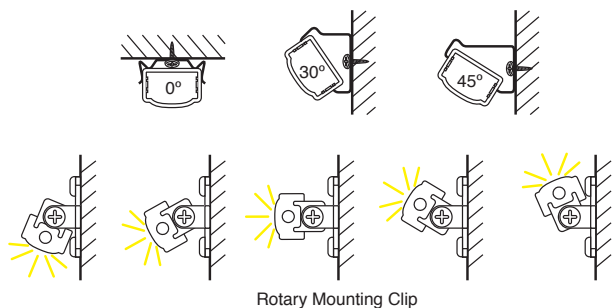

## PRODUCT CODES

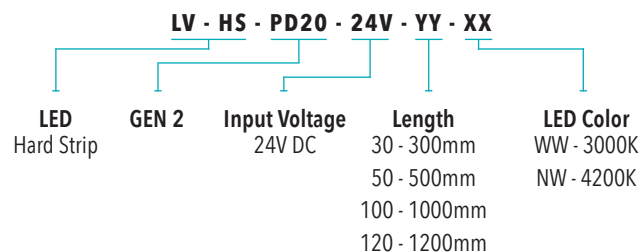

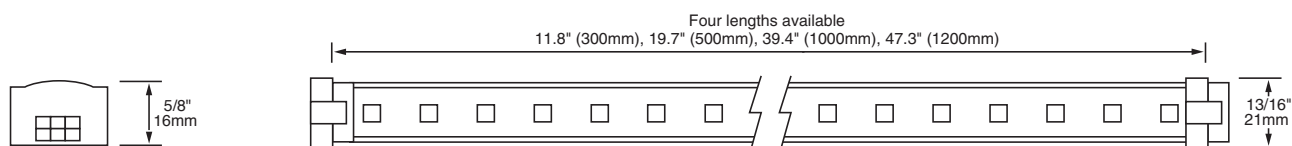

## ACCESSORIES



**LV-HS-PD20-PF1-12**  
12" Power Feed for LED Hard Strip single color, Bar - DC plug power supply



**LV-HS-PD20-PF1-39**  
39" Power Feed for LED Hard Strip single color, Bar - DC plug power supply



**LV-HS-PD20-PF1-HW**  
39" Power Feed for LED Hard Strip single color, Bar - Hard wire power supply



**LV-HS-PD20-PC1-12**  
12" Power Connector for LED Hard Strip single color, Bar - Bar



**LV-HS-PD20-PC1-39**  
39" Power Connector for LED Hard Strip single color, Bar - Bar



**LV-HS-PD20-PC1-3**  
3" Power Connector for LED Hard Strip Single Color, Bar - Bar



**LV-HS-CN-3DC**  
Connector for Hard Strip, with 12" wire lead and 3 DC connectors




**LV-HS-EC**  
End Cap for LED Hard Strip




**LV-HS-MC0**  
Mounting clip (2pk)



**LV-HS-MC30**  
Mounting clip 30° (2pk)



**LV-HS-MC45**  
Mounting clip 45° (2pk)



**LV-HS-MCTR**  
Rotary Mounting clip (2pk)

## NON DIMMABLE PLUG IN DRIVERS

### LV-HSDR-36-24-PC

36W plug-in driver, 24V, DC Portable Driver, 1.5A output, 100V-240V input voltage; with six foot (72") power cord to polarized 2-prong AC plug and 60" lead wire to DC plug and switch cUL/us Listed

### LV-HSDR-60-24-PC

60W plug-in driver, 24V, DC Portable Driver, 2.5A output, 100V-240V input voltage; with six foot (72") power cord to polarized 2-prong AC plug and 60" lead wire to DC plug and switch cUL/us Listed

## DIMMABLE DRIVERS

### TRE24L40DC

Max recommended load 36W, min. 8W LED Hard Strip 6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE24L96DC

Max recommended load 90W, min. 8W LED Hard Strip 6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver  
Max. recommended load 90W per single tap, 120W combined two secondary taps.  
120W hardwire  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

# LED Britestrip

National Specialty Lighting's popular Britestrip provides the ultimate in linear lighting systems.



## FEATURES

- Indoor use only
- 0.52W, 24V LED modules for up to 85% energy savings
- 3, 4 or 5 lamps per foot models
- Snap in lamp holders for easy lamp replacement
- MR-11 lamp adaptors for hi-lighting items in showcases
- Mounts with 3M double sided tape or mounting clips
- Parallel wiring means loss of one bulb does not affect others
- Field cuttable
- 50,000 hour average lamp life
- Fully dimmable with dimmable power supply (sold separately)
- 2 year limited warranty

## APPLICATIONS

- Under cabinets
- Above cabinets
- Showcase lighting
- Cove lighting
- Indirect lighting
- Sign back lighting
- Shelf lighting
- Decorative accents

## PRODUCT CODES


### LBL - Z - XX/YY

LED	LAMPS/FT	STRIP LENGTH	LIGHT STRIP
Britestrip	2 - 2 bulbs/ft.	Custom length OR 100' - 100' spool	COLOR
	3 - 3 bulbs/ft.		WH - White
	4 - 4 bulbs/ft.		BK - Black

## LAMP PRODUCT CODES

Festoon Lamps - LED  
Average Lamp Life: 50,000 hours  
Maximum Single Run: 158 LED festoon modules (82 Watts)

**LBL-24-.5CW**  
24V, 0.52W,  
5000-5300K, 36 lumens output  
**LBL-24-.5WW**  
24V, 0.52W,  
2300-2600K, 32 lumens output

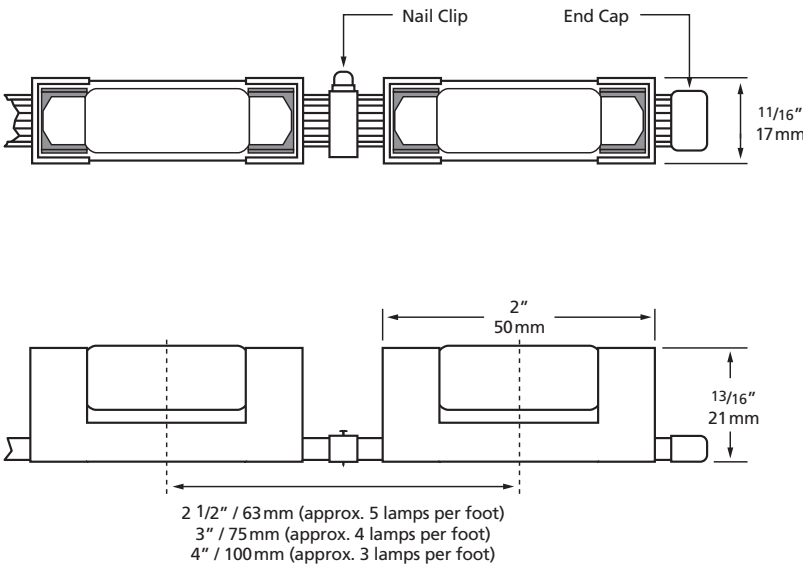

## ACCESSORIES



**BL-001/WH**  
White Assembly Kit  
(required to ship with every cut). Includes junction box, terminal block and end cap.  
2.2"L x 1.8"W x 1"H  
(55.9 x 45.7 x 25.4mm)

**BL-001/BK**  
Black Assembly Kit



**BL-003/WH**  
White End caps  
**BL-003/BK**  
Black End Caps



**LW-12G/WH**  
White Lead Wire  
**LW-12G/BK**  
Black Lead Wire


## MOUNTING OPTIONS




**DOUBLE SIDED TAPE**  
on every socket



**BL-005/WH**  
White Nail Clips  
**BL-005/BK**  
Black Nail Clips



**BLF-4-BA**  
**BLF-4-PB**  
**BLF-4-GW**  
**BLF-4-GB**  
Britestrip Reflector. Sold in 4' lengths only. Custom cutting for pieces less than 4' available.



**BLCOVE-4-GW**  
Cove Reflector. Sold in 4' lengths only. Custom cutting for pieces less than 4' available.

## DIMMABLE DRIVERS

### TRE24L40DC

Max 76 LED Britestrip lamps, Min 16 LED Britestrip lamps  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE24L96DC

Max 180 LED Britestrip lamps, Min 16 LED Britestrip lamps  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor driver  
Max. 110 LED Britestrip lamps  
Single secondary tap, max. 185 total  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 55.6mm)



# GEN II 3-COLOR TEMPERATURE LED Task Star

All the convenience of traditional task light, with the benefits of CCT adjustable LED technology.

**NEW: 1/2" Knockouts for easy installation**



## FEATURES

- 3 position switch for color temperature adjustment (3000K/4000K/5000K)
- Available in 5 lengths for multiple applications
- Dimmable with most ELV dimmers.  
Continuous dimming with a 5%-100% dimming range.
- 90 CRI
- Captive mounting screws
- Easy installation
- High Low switch
- 5 year limited warranty
- Available in white, black, bronze and aluminum finish

## APPLICATIONS

- Under cabinet task light
- Work stations
- Over cabinet accent light
- Display cases and exhibits
- Merchandising
- Wall units and bars



## PRODUCT CODES

**LTS - II - Y - HW/XX**

Gen 2	SIZE	TRIM FINISH
LED Task	1 - 9.5"	WH - White
Star	2 - 17.5"	BK - Black
	3 - 26"	BZ - Bronze
	4 - 34.5"	AL - Aluminum
	5 - 43"	

## SPECIFICATIONS

Input Voltage	120V AC
Power Consumption	9.5"=5W 17.5"=10W 26"=15W 34.5"=20W 43"=25W
Color Temperature	3000K/4000K/5000K
Lumen Output	9.5"=310LM 17.5"=650LM 26"=1000LM 34.5"=1300LM 43"=1500LM
Appearance Size (L x W x H)	9.5" - 9.5" x 4.47" x 1.54" (240 x 113.5 x 39mm) 17.5" - 17.5" x 4.47" x 1.54" (443.5 x 113.5 x 39mm) 26" - 26" x 4.47" x 1.54" (659.2 x 113.5 x 39mm) 34.5" - 34.5" x 4.47" x 1.54" (874.9 x 113.5 x 39mm) 43" - 43" x 4.47" x 1.54" (1090.6 x 113.5 x 39mm)
LED Life	50,000 hours
Lens	Frosted Glass
Finish	BK - Black BZ - Bronze AL - Aluminum WH - White
Dimming	Dimmable with most ELV dimmers. Continuous dimming with a 5%-100% dimming range.
CRI	90+
Approvals	cETLus

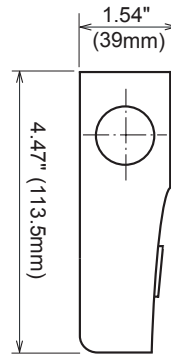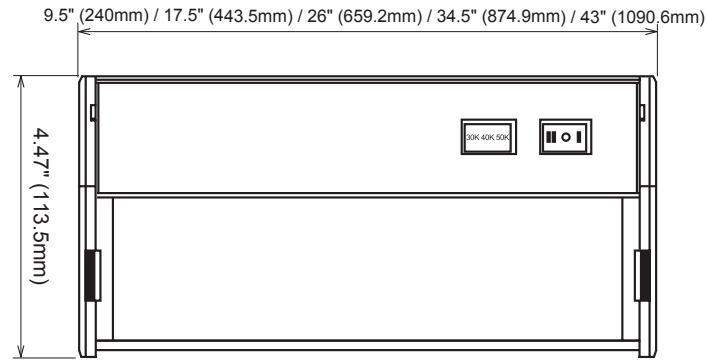

# LED Task Star PRO

## Color CHANGEABLE

LTSPRO is constructed with aluminum housing and a matte polycarbonate diffuser. This sleek fixture features edge lit technology which means no hot spots on the polished marble or granite counter top.



### FEATURES

- 50,000 hours life
- Adjustable to 3 color temperatures: 2700K, 3300K and 4000K (warm white to cool white)
- Dimmable with most ELV dimmers
- Comes with High / Low Switch
- Low power consumption
- Edge Lit technology eliminates hot spots – smooth luminance
- Fast and easy installation – quick connects, captive mounting holes
- Comes with cord and plug as well as knockouts for hardwire
- 3/8" connector provided
- Shallow profile conceals fixture
- Linkable up to 400 watts. Each fixture ships with 8" jumper cable and end-to-end connector
- 90 CRI
- Available in 6 sizes – 9", 12", 18", 24", 32" and 40"
- cETLus and Energy Star listed
- 3 year limited warranty

### APPLICATIONS

- Under cabinet task light
- Over cabinet accent light
- Display cases and exhibits
- Merchandising
- Indirect accent light
- Wall units and bars
- Office work stations


### PRODUCT CODES

#### LTSPRO - XX - YY

LED	SIZE	TRIM FINISH
Task Star	9 - 9"	WH - White
PRO	12 - 12"	BK - Black
	18 - 18"	BZ - Bronze
	24 - 24"	SN - Satin Nickel
	32 - 32"	
	40 - 40"	

### SPECIFICATIONS

Input Voltage	120V AC
Power Consumption	9" = 3W
	12" = 5W
	18" = 8W
	24" = 12W
	32" = 16W
Power Factor	40" = 20W
	0.95
LEDs	Epistar
LED Life	50,000 hours
CCT	2700K - 4000K
Lumen Output	9" = 150 - 200 Lumens
	12" = 250 - 300 Lumens
	18" = 380 - 450 Lumens
	24" = 650 - 700 Lumens
	32" = 850 - 900 Lumens
CRI	40" = 950 - 1000 Lumens
	> 90
Cover Finish	Extruded Aluminum housing / High impact PC plastic end caps / Matte white polycarbonate diffuser
Appearance Size (L x W x H)	9" - 9" x 3.5" x 1" (22.9 x 8.9 x 2.5cm)
	12" - 12" x 3.5" x 1" (30.5 x 8.9 x 2.5cm)
	18" - 18" x 3.5" x 1" (45.7 x 8.9 x 2.5cm)
	24" - 24" x 3.5" x 1" (61.0 x 8.9 x 2.5cm)
	32" - 32" x 3.5" x 1" (81.3 x 8.9 x 2.5cm)
Approvals	40" - 40" x 3.5" x 1" (101.6 x 8.9 x 2.5cm)
	cETLus listed and Energy Star rated

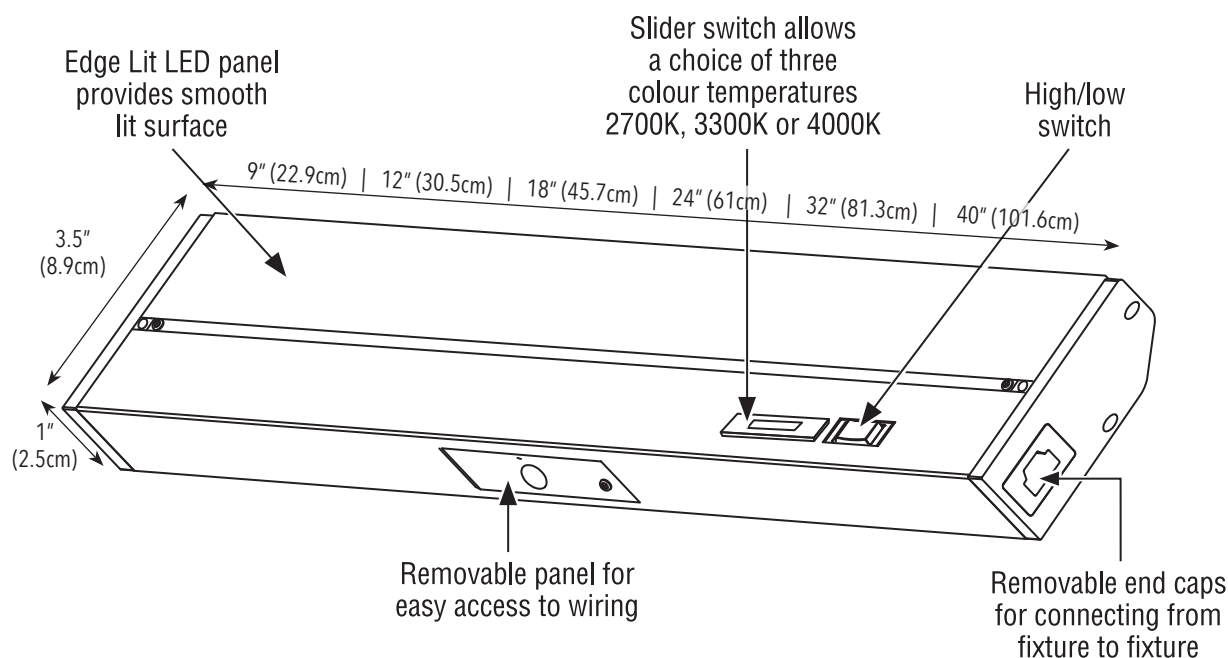

## ACCESSORIES



**LTSPRO-J-12\***  
12" jumper cable  
**LTSPRO-J-18\***  
18" jumper cable  
**LTSPRO-J-24\***  
24" jumper cable  
**LTSPRO-J-32\***  
32" jumper cable



**LTSPRO-PC-72\***  
72" replacement power cord and plug



**LTSPRO-JB**  
Hardwire junction box for LTSPRO fixtures - allows for direct wiring installation, eliminating the visible household wire. Add (-BK) at the end of part number for black finish.



**RC-01**  
3/8" Romex connector

\* Note : add (-BK) at the end of part number for black cable.

\*\*Each fixture ships with one 8" jumper cable, one end-to-end connector and one 3/8" Romex connector.

## REPLACEMENT PARTS

**LTSPRO-SW-BK**  
CCT Slider Switch Cover, Black

**LTSPRO-SW-WH**  
CCT Slider Switch Cover, White

# LED Task Star

All of the convenience and light output of traditional task lights with the benefits of dimmable LED technology. There are no remote or internal LED drivers to worry about as the replaceable modules work directly off of line voltage. Simply connect directly to 120 Volt power.



**Save up to 80%**  
in energy consumption with same light  
output as 18 watt xenon!



## FEATURES

- Dimmable with most ELV dimmers
- Low power consumption – as low as 5.2 watts per module
- Warm White color temperature (3100K +/- 200)
- 40,000 hour useful lamp life
- Fast and easy installation – push in terminals for hard wire connection
- 120 volt through wiring
- Available in 1, 2, 3, 4 & 5 LED module units
- Secure hinged lens
- Captive mounting screws in lamp compartment
- Available in 4 colors: White, Bronze, Black and Brushed Aluminum
- 3 year limited warranty

## APPLICATIONS

- Under cabinet task light
- Over cabinet accent light
- Display cases and exhibits
- Merchandising
- Indirect accent light
- Wall units and bars
- Office work stations


## PRODUCT CODES

### LTS - X - HW/YY


LED Task Star	NUMBER OF LED MODULES	WIRING OPTION	FINISH
	1 - 1 LED Module	HW - Hard Wire	<b>WH</b> - White
	2 - 2 LED Modules		<b>BK</b> - Black
	3 - 3 LED Modules		<b>BZ</b> - Bronze
	4 - 4 LED Modules		<b>AL</b> - Aluminum
	5 - 5 LED Modules		

## SPECIFICATIONS

Electrical	Input: AC 120V 5.2 watts per LED module
LED Life	40,000 hours
Number of LED modules per fixture	1 - 5
Lumen Output	175 lumens/module
Color Temperature	3100K +/-200
CRI	≥ 80
LED Color	3100K +/-200K
LED Angle	125 degrees
Replacement LED Module	LEDMOD-HVDC
Product Finish	Black & White: Powder Coating Aluminum, Bronze: Anodized
Lens	Frosted Glass
Dimensions (L x W x H)	
1 LED Module Task Star	9" x 4 5/8" x 1 1/2" (229 x 113 x 39mm)
2 LED Module Task Star	17 1/2" x 4 5/8" x 1 1/2" (445 x 113 x 39mm)
3 LED Module Task Star	26" x 4 5/8" x 1 1/2" (659 x 113 x 39mm)
4 LED Module Task Star	34 1/2" x 4 5/8" x 1 1/2" (875 x 113 x 39mm)
5 LED Module Task Star	38 1/2" x 4 5/8" x 1 1/2" (967 x 113 x 39mm)
Approvals	cETLus listed

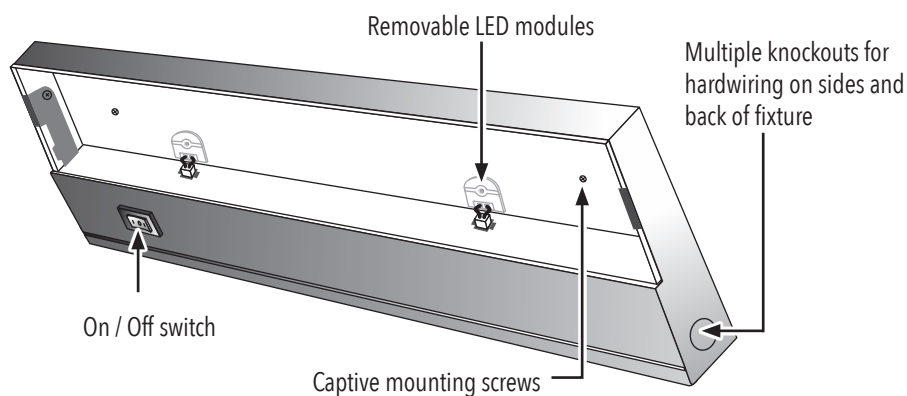

Available in 1, 2, 3, 4 and 5 module units.

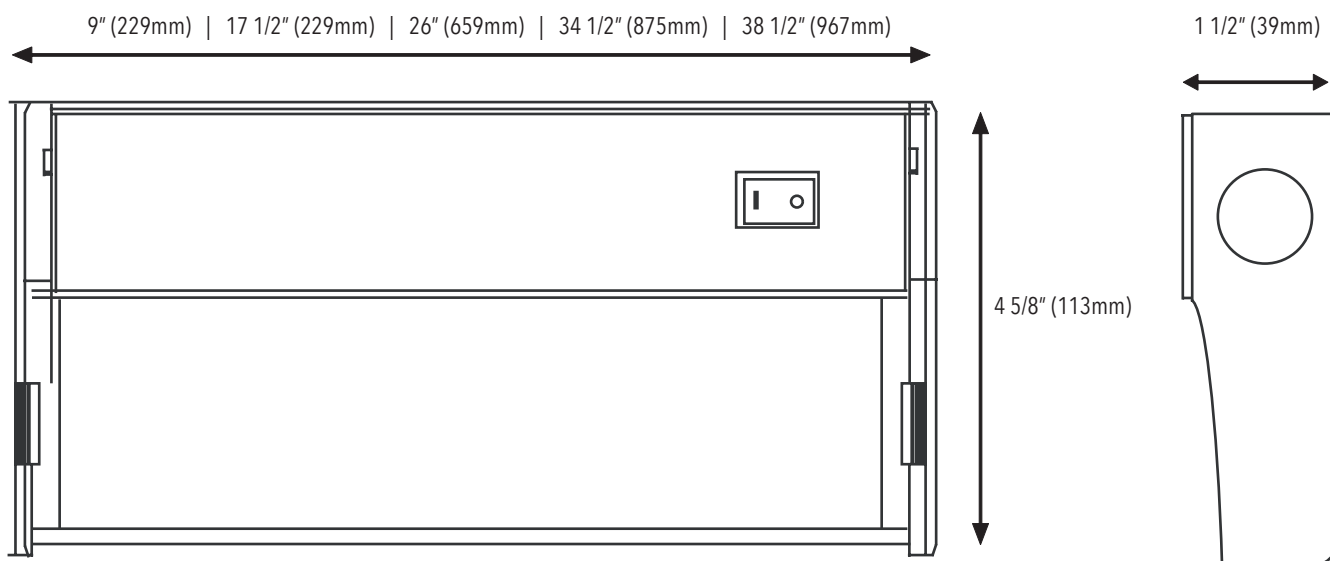

## ACCESSORIES



**LEDMOD-32-FF**  
Warm white LED  
replacement module  
3100K  $\pm$  200



**LED-REC-1**  
Rectifier for LTS-1  
**LED-REC-2**  
Rectifier for LTS-2  
**LED-REC-3**  
Rectifier for LTS-3  
**LED-REC-4**  
Rectifier for LTS-4  
**LED-REC-5**  
Rectifier for LTS-5

# LED Edgelit Puck Lights

The Edge Lit Puck Lights are sleek and powerful surface mount lighting fixtures, combining the easy installation with high performance LED's. Featuring strong internal magnets, these fixtures can be installed on metal surfaces, without screws or mounting holes.



## FEATURES

- 30,000 hours life
- Edgelit design with smooth light output
- Safe 24V low voltage operation
- Operating temperature: -30°C to 40°C
- Durable die-cast aluminum housing suitable for dry location
- Strong magnet and stamped steel plate for surface mounting
- 72 inch pre-installed lead wire
- 3-year limited warranty


## APPLICATIONS

- Under cabinets
- Over cabinets
- Indirect lighting
- Display cases
- Furniture
- Shelf lighting

## PRODUCT CODES


### ROUND

#### EPL - SR - WW - XX

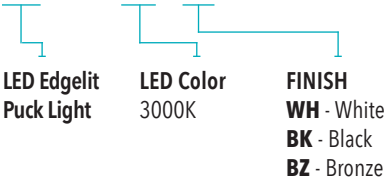

### SQUARE






#### EPL - SS - WW - XX

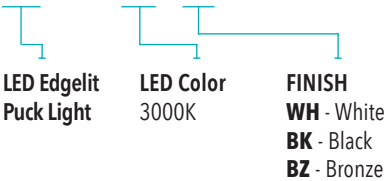

## SPECIFICATIONS

Electrical	24V DC, 4W
LED Specs	5630 SMD LEDs
Efficacy	50 Lumens per Watt
Fixture Illuminance	200 Lumens
Color Temperature	3000K
CRI	> 90
Product Material	Die-cast aluminum
Finish	White, Black, Bronze
Mounting	Surface mount
Approvals	cETLus





## ACCESSORIES



### LMSII-001

Terminal block and junction box for connection to additional lengths of power cable if needed.

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE24L40DC

Max recommended load 36W or 9 Edge Lit Puck Lights,  
min 8W or 2 Edge Lit Puck Lights  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE24L96DC

Max recommended load 92W or 23 Edge Lit Puck Lights,  
min 8W or 2 Edge Lit Puck Lights  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver  
Max. recommended load 96W or  
24 Edge Lit Puck Lights per single tap,  
120W or 30 Edge Lit Puck Lights combined two  
secondary taps.  
120W hardware  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

## NON-DIMMABLE PLUG IN DRIVERS

### LMS-24-18W

Max. 16W or 4 Edge Lit Puck Lights

### LMS-24-60W

Max. 56W or 14 Edge Lit Puck Lights

# Ceiling Lights

Ceiling Lights will compliment any designer look, at home or in your place of business. Typically, these fixtures will replace any existing traditional indoor ceiling fixtures, providing designer quality light solutions, while creating tremendous energy savings.



## FEATURES



- Elegant and energy efficient design
- Available in brushed nickel trim
- Suitable for damp location
- Input voltage 120VAC
- Dimmable with most ELV dimmers
- 50,000 hours life
- cETLus listed
- Easy installation
- Maintenance free
- Even light distribution
- 5 year warranty

## APPLICATIONS

- Kitchens
- Lobbies
- Hallways
- Banquet halls
- Retail
- Restaurants

## PRODUCT CODES

**CLD - 1625 - XXK - BN**

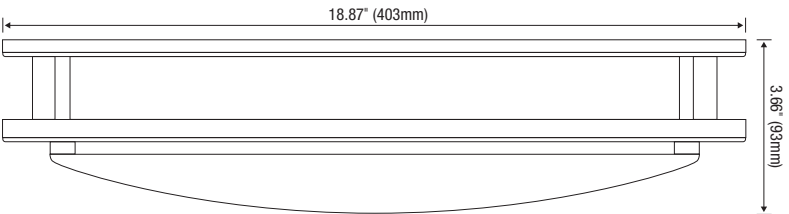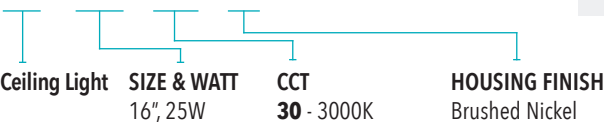

## SPECIFICATIONS

Electrical	120 VAC, 25W
LED Life	50,000 hours
Lumen Output	1875 Lumens
CRI	≥ 80
Color Temperature	3000K
Housing Finish	Brushed Nickel
Approvals	cETLus listed and Energy Star rated

NOTE: MOQ may apply

# Wall Sconces

Beautifully designed, elegant and a great addition to any decor, Wall Sconces will compliment any designer look. These fixtures can replace any existing indoor accent lighting, creating tremendous energy savings, at an extremely affordable price.



## FEATURES


- Elegant and energy efficient design
- Brushed nickel trim finish
- Input voltage 120V AC
- Dimmable with most ELV dimmers
- 50,000 hours life
- Suitable for damp location
- cETLus listed
- Easy installation
- Maintenance free
- Even light distribution
- 5 year warranty

## APPLICATIONS

- Hallways
- Lobbies
- Banquet halls
- Retail
- Restaurants

## PRODUCT CODES


### WSL - 15 - XXK - BN



NOTE: MOQ may apply

## SPECIFICATIONS

Electrical	120V AC, 15W
LED Life	50,000 hours
Lumen Output	1600 Lumens
CRI	≥ 80
Color Temperature	3000K
Housing Finish	Brushed Nickel
Approvals	cETLus listed and Energy Star rated

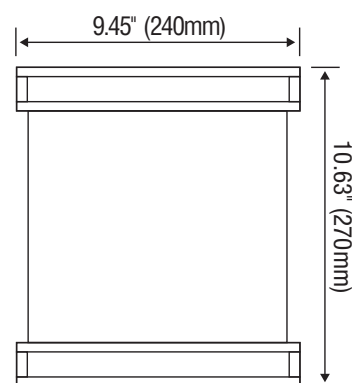

# LED Thin-Line Round Down Light

## GEN III

Thin-line LED Down Lights are a breakthrough in LED down light technology. Designed for remodel and new construction, wet locations listed, Thin-Line Down Lights are a versatile and affordable choice for countless applications.

### FEATURES

- Energy Star rated - up to 80% energy savings
- Dimmable to 5% with most ELV dimmers
- Ultra thin design
- Suitable for wet locations
- 120° beam spread
- No IC can required
- Temperature rating: -20°C-45°C
- Airtight
- The driver is wired for 120V input
- 50,000 hour life
- 5 year limited warranty
- Airtight
- cETLus and Energy Star listed
- White finish
- Interchangeable brushed nickel, black and bronze trim rings available (sold separately)



### APPLICATIONS

- Kitchens & Pantries
- Laundry Rooms
- Bathrooms
- Lobbies
- Hallways
- Banquet Halls
- Elevators
- Retail lighting
- Restaurants
- Offices

### SPECIFICATIONS

	3 inch	4 inch	6 inch	8 inch	10 inch
LED Color	White				
Color Temperature	3000K / 4000K				
Input Voltage	120V				
Power Consumption (W)	6	9	12	15	20
No. SMD2835 LEDs	36	48	72	96	120
Lumens					
WW	487	701	1046	1152	1776
NW	492	719	1079	1276	1786
CRI	80+				
Dimmable	120V only				
Life Span (hours)	50,000 hrs				
Appearance Size D1 x D2 x H	3.15" x 3.74" x 0.5" (80mm x 95mm x 13mm)	4.17" x 4.73" x 0.5" (106mm x 120mm x 13mm)	6.14" x 6.85" x 0.5" (156mm x 174mm x 13mm)	8.15" x 8.9" x 0.5" (207mm x 226mm x 13mm)	10" x 10.79" x 0.5" (254mm x 274mm x 13mm)
Installation Hole Size	3.35" (85mm)	4.33" (110mm)	6.3" (160mm)	8.27" (210mm)	10.16" (258mm)
Dimensions (J-Box) L x W x H	4.8" x 2.05" x 1.86" (122mm x 52mm x 47.3mm)	3.74" x 3.5" x 1.3" (95mm x 89mm x 33mm)	3.74" x 3.5" x 1.3" (95mm x 89mm x 33mm)	3.74" x 3.5" x 1.3" (95mm x 89mm x 33mm)	3.74" x 3.5" x 1.3" (95mm x 89mm x 33mm)

### PRODUCT CODES

#### ROUND

**LVL**DL - **YY** - **XX** - WH - R - L3

LED Thin Line  
Down Lights  
Gen III

**SIZE**  
**03** - 3"  
**04** - 4"  
**06** - 6"  
**08** - 8"  
**10** - 10"

**LED COLOR**  
**WW** - 3000K  
**NW** - 4000K

#### ROUND TRIM RINGS (Sold Separately)

LVLDL - **03** - TR - **XX** - L3  
LVLDL - **04** - TR - **XX** - L3  
LVLDL - **06** - TR - **XX** - L3  
LVLDL - **08** - TR - **XX** - L3  
LVLDL - **10** - TR - **XX** - L3

#### TRIM RING FINISH

**BK** - Black  
**BZ** - Bronze  
**BN** - Brushed Nickel

#### BEAUTY RINGS (Sold Separately)

LVLDL - BR - **3** - L3  
LVLDL - BR - **4** - L3  
LVLDL - BR - **6** - L3  
LVLDL - BR - **8** - L3  
LVLDL - BR - **10** - L3



† White finish only.

#### STEP-DOWN TRANSFORMERS


**DLT-277**  
Step-down transformer  
277/120V AC 25VA  
(non-dimmable)

#### EXTENSION CORDS (for remote driver placement)


**LV-DL-EX-10-L**  
10Ft extension cord  
**LV-DL-EX-30-L**  
30Ft extension cord

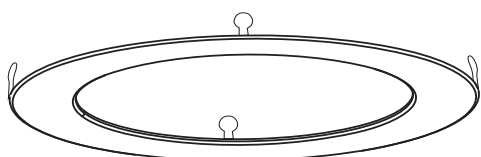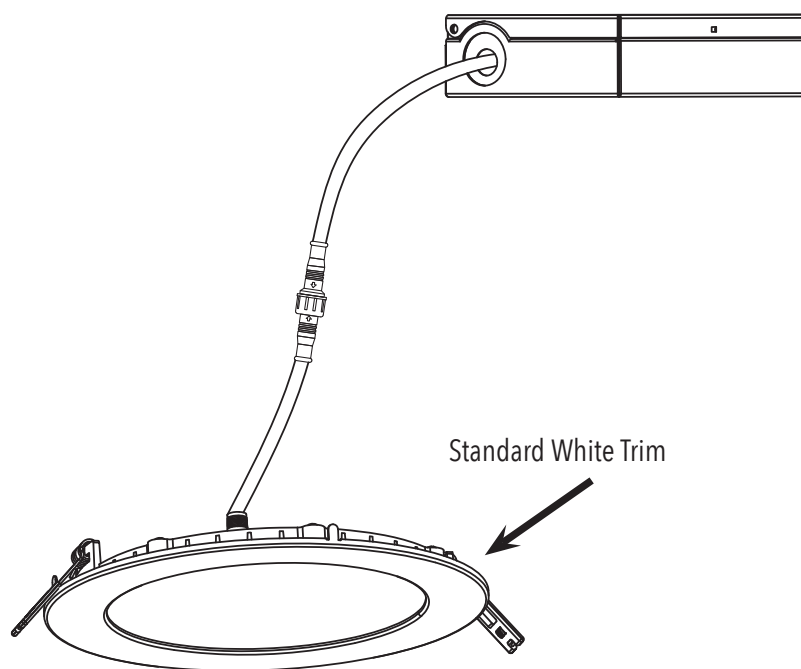


Interchangeable brushed nickel, black and bronze trim rings available (*sold separately*).

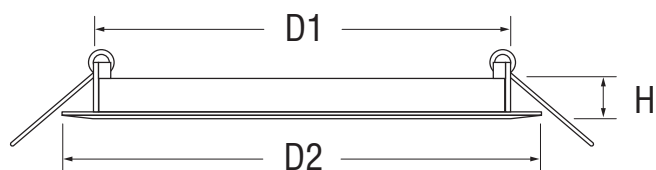




## BEAUTY RINGS


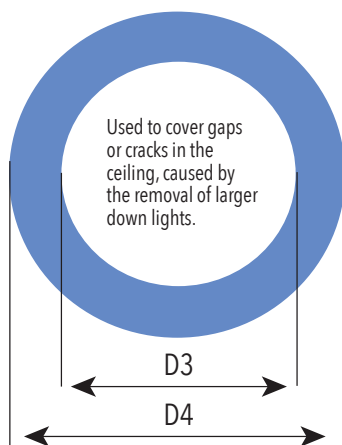


Size	D3	D4
3"	84mm (3.31")	114mm (4.49")
4"	109mm (4.29")	139mm (5.47")
6"	160mm (6.3")	194mm (7.64")
8"	210mm (8.27")	245mm (9.65")
10"	261mm (10.28")	293mm (11.54")

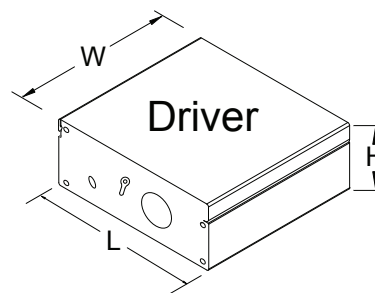

CONSTRUCTION PLATES

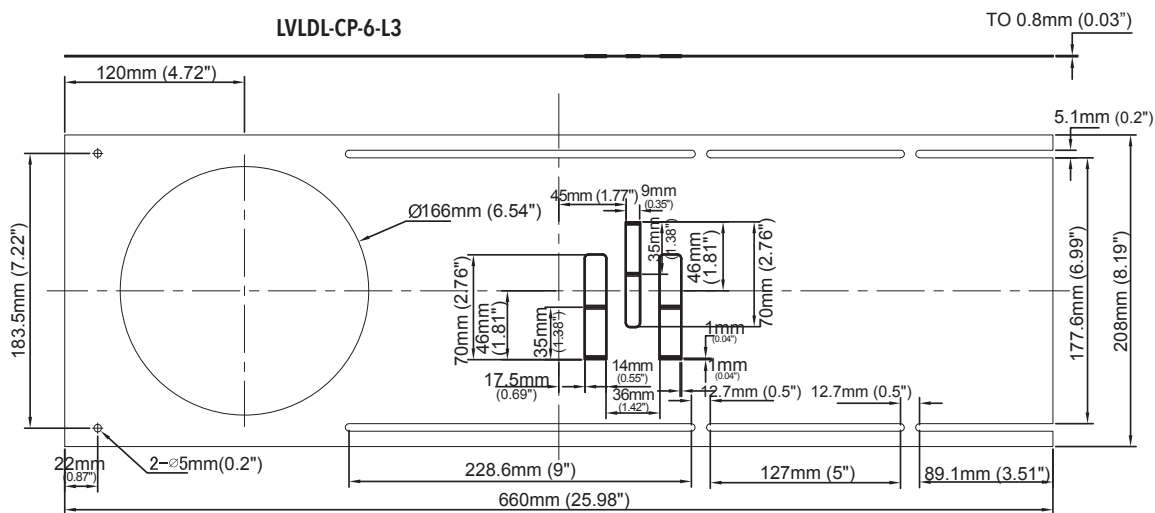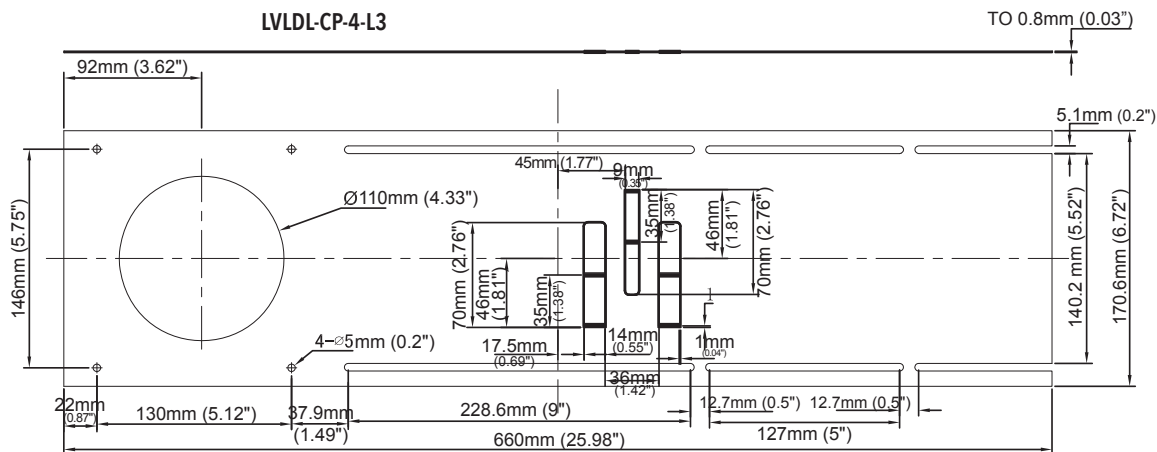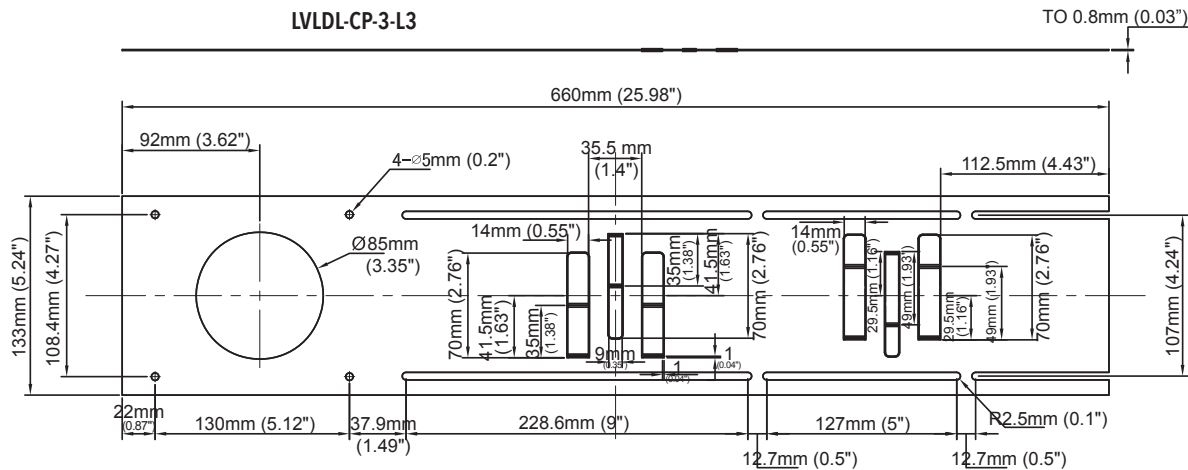

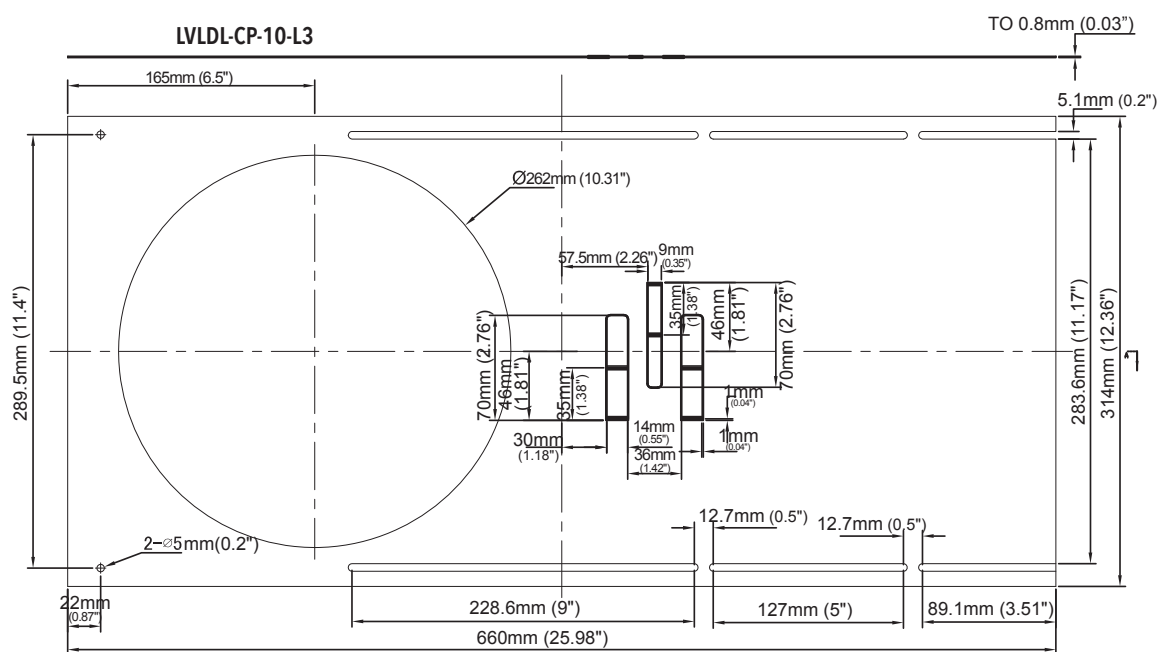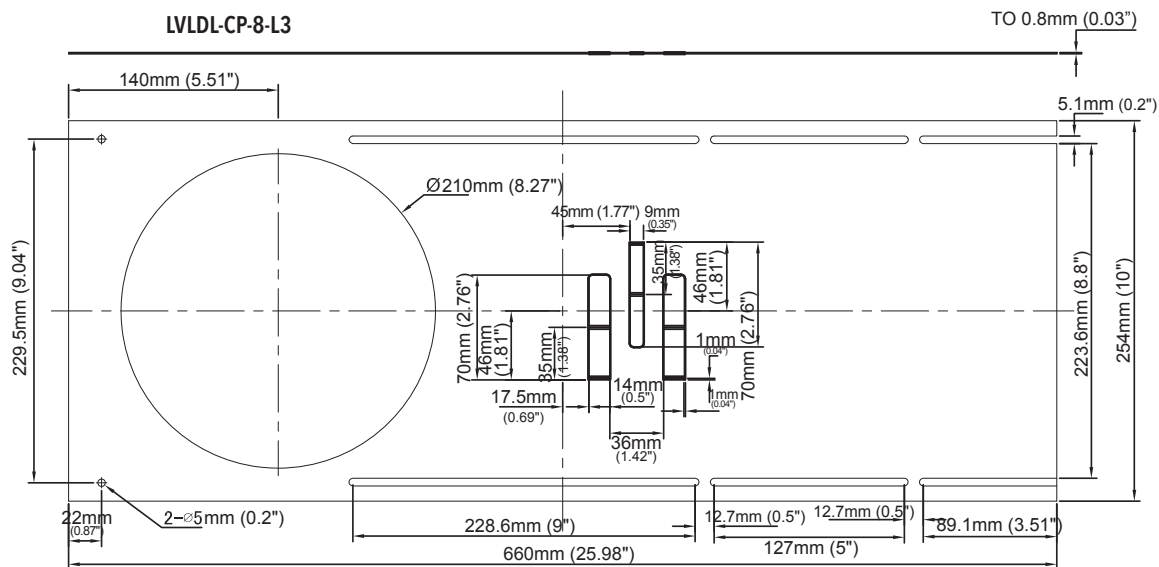



# LED Thin-Line Square Down Light GEN III

Designed for remodel and new construction, wet locations listed, Thin Line Down Lights are a versatile and affordable choice for countless applications.

## FEATURES

- Low profile, perfect for shallow ceiling plenums
- No IC can required, for direct contact with insulation and combustible materials
- Two spring loaded clips to attach to any ceiling material
- 120 degrees beam spread
- Edge lit technology eliminates hot spots
- 80+ CRI
- Temperature rating: -20°C-45°C
- 50,000 hours life
- Dimmable with most ELV dimmers
- cETLus listed for wet locations
- White finish
- Interchangeable brushed nickel, black and bronze trim rings available (sold separately)

## APPLICATIONS

- Kitchens & Pantries
- Laundry Rooms
- Bathrooms
- Lobbies
- Hallways
- Banquet Halls
- Elevators
- Retail lighting
- Restaurants
- Offices

## PRODUCT CODES

### SQUARE

**LVLDL - YYS - XX - WH - R - L3**

LED Thin Line  
Square Down  
Lights Gen III

SIZE  
**04** - 4"  
**06** - 6"

LED COLOR  
**WW** - 3000K  
**NW** - 4000K

### SQUARE TRIM RINGS

(Sold Separately)

LVLDL - **04S** - TR - **XX** - L3

LVLDL - **06S** - TR - **XX** - L3

### TRIM RING FINISH

**BK** - Black  
**BZ** - Bronze  
**BN** - Brushed Nickel

### STEP-DOWN TRANSFORMERS

#### DLT-277

Step-down transformer  
277/120V AC 25VA  
(non-dimmable)

### EXTENSION CORDS (for remote driver placement)

#### LV-DL-EX-10-L

10Ft extension cord




#### LV-DL-EX-30-L

30Ft extension cord



## SPECIFICATIONS


	4 inch	6 inch
Power Consumption (W)	9W	12W
Lumens		
3000K	627	962
4000K	704	1069
Dimming	Yes	
Appearance Size D1 x D2 x H	4.17" x 4.73" x 0.5" (106mm x 120mm x 13mm)	6.14" x 6.73" x 0.5" (156mm x 171mm x 13mm)
Dimensions (J-Box) D1 x D2 x H	3.74" x 3.5" x 1.3" (95mm x 89mm x 33mm)	
Installation Hole Size	4.33" (110mm)	6.3" (160mm)
Color Rendering Index	80+	
Input Voltage	120V	
Color Temperature	3000K / 4000K	
LEDs	Epistar	
Power Factor	0.95	

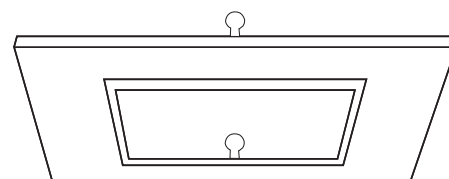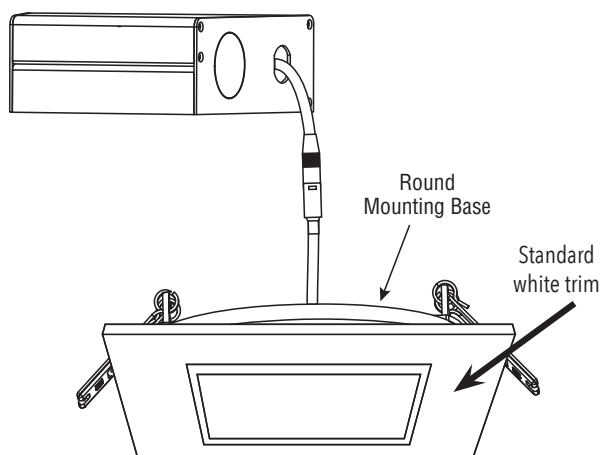


Interchangeable brushed nickel, black and bronze trim rings available (*sold separately*).

## CONSTRUCTION PLATES

LVLDL-CP-4-L3

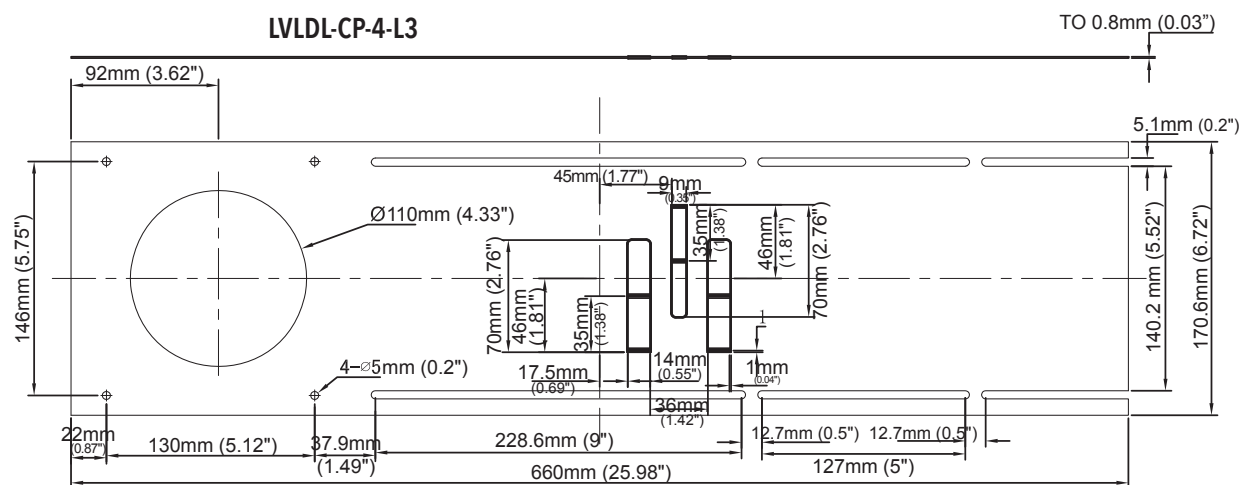

LVLDL-CP-6-L3

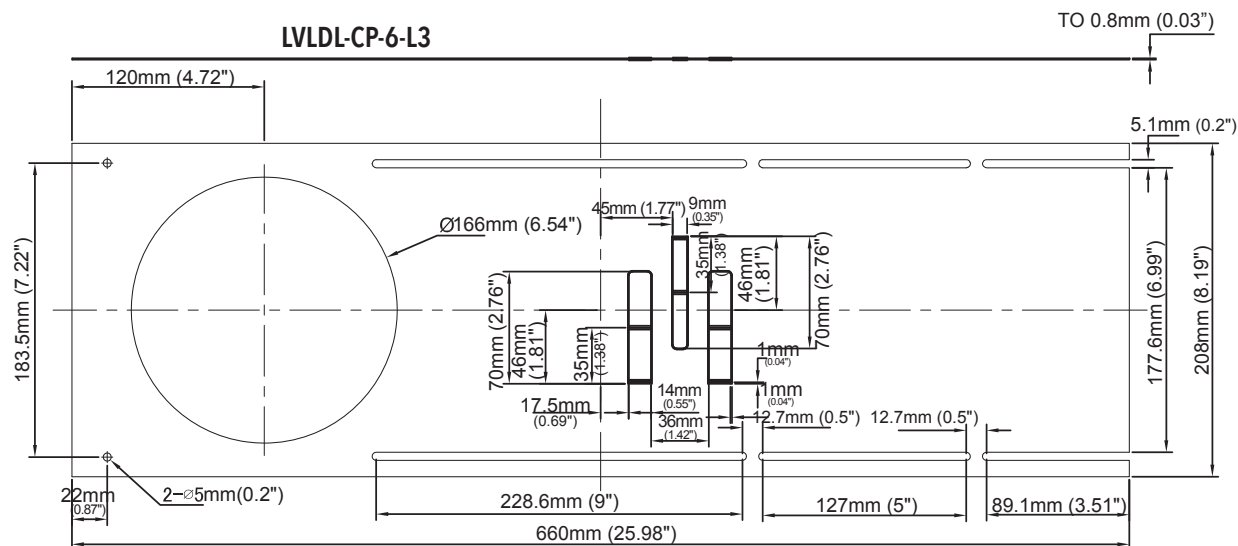

# 3-Color TEMPERATURE LED Thin-Line Down Light

Designed for remodel and new construction, wet locations listed, Thin-Line Down Lights are a versatile and affordable choice for countless applications.



## FEATURES

- Energy Star rated - up to 80% energy savings
- Dimmable to 5% with most ELV dimmers
- 120° beam spread
- Adjustable color temperature 2700K/3000K/4000K
- Two spring loaded clips to attach to any ceiling material
- Wet locations listed
- Temperature rating: -20°C-45°C
- No IC can required, for direct contact with insulation and combustible materials
- The driver is wired for 120V input
- 50,000 hour life
- 5 year limited warranty
- Airtight
- cETLus and Energy Star listed
- White finish
- Interchangeable brushed nickel, black and bronze trim rings available (sold separately)

## APPLICATIONS

- Kitchens & Pantries
- Laundry Rooms & Bathrooms
- Lobbies & Hallways
- Banquet Halls
- Elevators
- Retail lighting
- Restaurants
- Offices

## SPECIFICATIONS

	3 inch	4 inch	6 inch
Power Consumption (W)	6W	9W	12W
Lumens			
2700K	360	686	935
3000K	390	728	975
4000K	420	749	978
Dimming	Yes		
Appearance Size D1 x D2 x H	3.15" x 3.74" x 0.5" (80mm x 95mm x 13mm)	4.17" x 4.73" x 0.5" (106mm x 120mm x 13mm)	6.14" x 6.85" x 0.5" (156mm x 174mm x 13mm)
Dimensions (J-Box) D1 x D2 x H	4.72" x 2.05" x 1.83" (120mm x 52.1mm x 46.5mm)	5.1" x 3.5" x 1.3" (129.6mm x 89mm x 33mm)	
Installation Hole Size	3.35" (85mm)	4.33" (110mm)	6.3" (160mm)
Color Rendering Index	80+		
Input Voltage	120V		
Color Temperature	2700K 3000K 4000K		
Approved Location	Wet		

NOTE: Each fixture ships with one constant current power supply.

## PRODUCT CODES

**LVLDL - YY - CCT - WH - R - L3**

**3 Color Temperature  
LED Thin-Line Down  
Lights**

**SIZE**  
**03** - 3"  
**04** - 4"  
**06** - 6"

**ROUND TRIM RINGS  
(Sold Separately)**

LVLDL - **03** - TR - **XX** - L3  
LVLDL - **04** - TR - **XX** - L3  
LVLDL - **06** - TR - **XX** - L3

**TRIM RING FINISH**  
**BK** - Black  
**BZ** - Bronze  
**BN** - Brushed Nickel

**BEAUTY RINGS  
(Sold Separately)**




LVLDL - BR - **3** - L3  
LVLDL - BR - **4** - L3  
LVLDL - BR - **6** - L3

† White finish only.

**STEP-DOWN TRANSFORMERS**

**DLT-277**



Step-down transformer 277/120V AC  
25VA (non-dimmable)

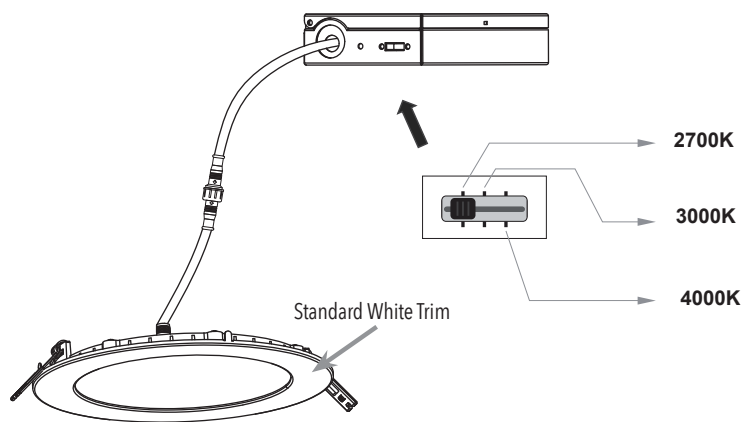



Interchangeable brushed nickel, black and bronze trim rings available (*sold separately*).

## CONSTRUCTION PLATES

## BEAUTY RINGS

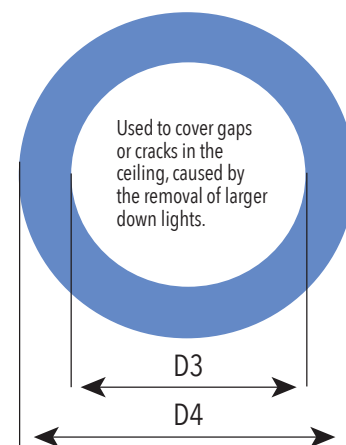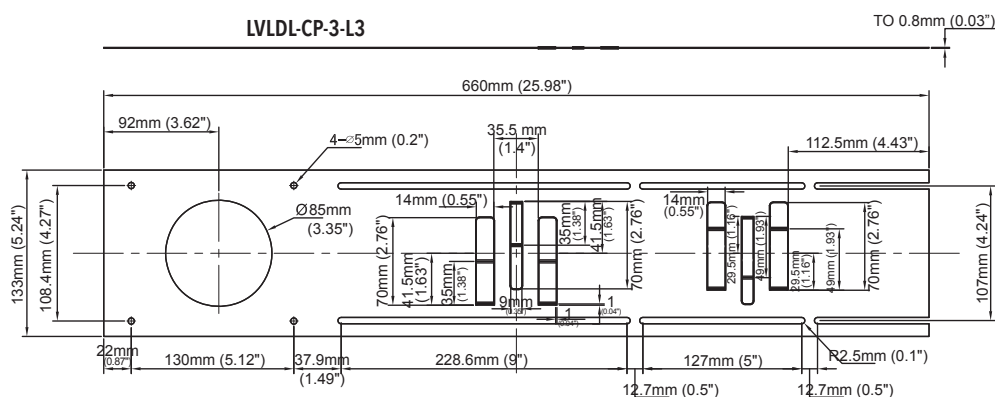

Size	D3	D4
3"	84mm (3.31")	114mm (4.49")
4"	109mm (4.29")	139mm (5.47")
6"	160mm (6.3")	194mm (7.64")
8"	210mm (8.27")	245mm (9.65")
10"	261mm (10.28")	293mm (11.54")

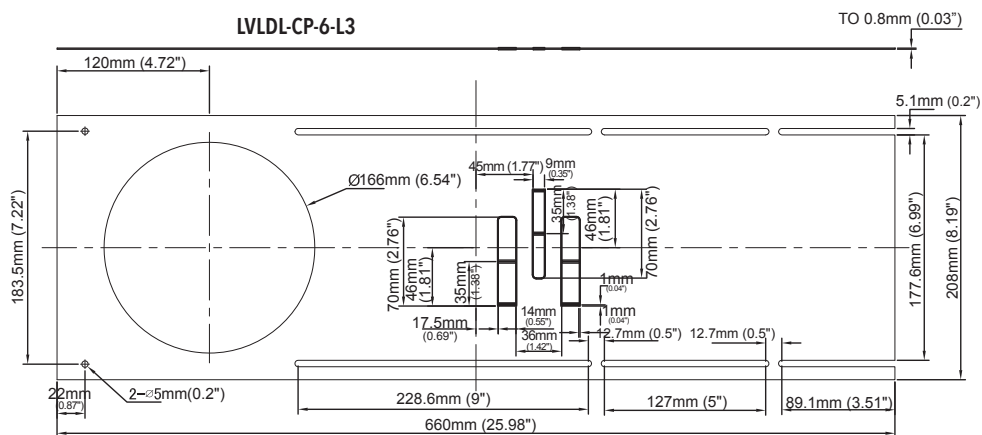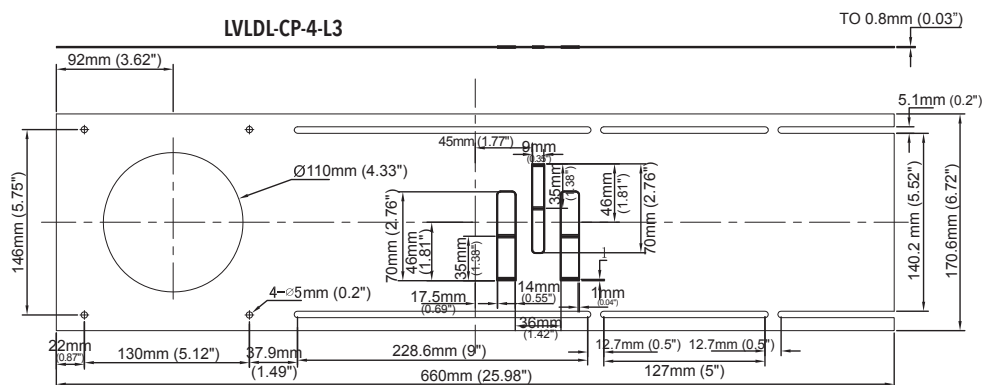

# LED Regressed Down Light CCT

Designed for remodel and new construction, LED Regressed Down Lights CCT are a versatile and affordable choice for countless applications. Available in two great options: CCT adjustable with slider selector switch (2700K/3000K/4000K) or CCT adjustable with bluetooth technology (2700K-5000K).



## FEATURES

- Two convenient options: Slider Switch CCT Adjustable (2700/3000/4000K) and Bluetooth CCT Adjustable (2700-5000K) through the free smartphone app
- 120° beam spread
- Dimmable: Slider Switch CCT Adjustable with Electronic Low Voltage (ELV) dimmers, and Bluetooth CCT Adjustable through the smartphone app
- Two spring loaded clips to attach to any ceiling material
- White finish. Interchangeable satin nickel, black and bronze trim rings available (sold separately).
- Bluetooth CCT Adjustable linkable up to 100 fixtures, individual and zonal control possible through the smartphone app
- Regressed design to reduce glare
- Suitable for damp locations
- Temperature rating: -20°C-45°C
- The driver is wired for 120V input
- Optional 347V Step-Down Transformer
- 90+ CRI
- 50,000 hour life
- 3 year limited warranty
- cETLus and Energy Star listed

## APPLICATIONS

- Kitchens & Pantries
- Lobbies & Hallways
- Banquet Halls
- Elevators
- Retail
- Restaurants
- Offices

## PRODUCT CODES

CCT SWITCH ADJUSTABLE  
RGL - 4B - 9W - SW  
RGL - 6B - 12W - SW

CCT BLUETOOTH ADJUSTABLE  
RGL - 4B - 9W - BT  
RGL - 6B - 12W - BT


TRIM RINGS (Sold Separately)  
RGL - 4 - TR - **XX**  
RGL - 6 - TR - **XX**

TRIM RING FINISH  
**BK** - Black  
**BZ** - Bronze  
**SN** - Satin Nickel

STEP-DOWN TRANSFORMERS  
**DLT-277**  
Step-down transformer 277/120V AC  
25VA (non-dimmable)

## SPECIFICATIONS


Color Temperature	Slider Switch CCT Adjustable: 2700/3000/4000K Bluetooth CCT Adjustable: 2700-5000K
Input Voltage	AC100-277V
Power Consumption (W)	4" = 9 watts 6" = 12 watts
Lumen Output	4" = 630LM 6" = 840LM
Luminous Efficacy	70LM/W
Operating Temperature	-20°C to 40°C
Color Rendering Index	90+
Installation Hole size	4" = 4.13" (105mm) 6" = 6.18" (157mm)
LED Life (hours)	50,000
Approvals	cETLus, Energy Star

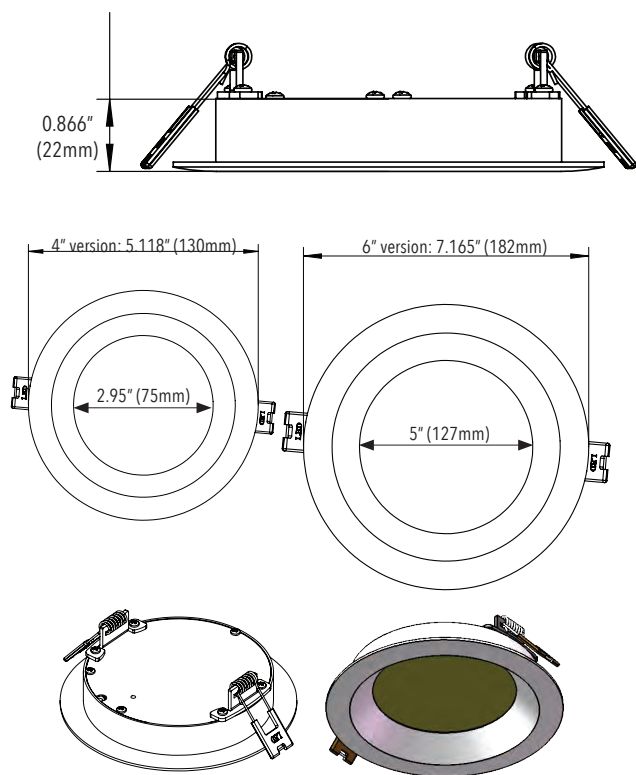


Available in Switch OR Bluetooth CCT control.



2700K-5000K

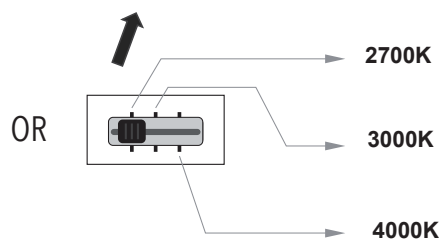

## CONSTRUCTION PLATES

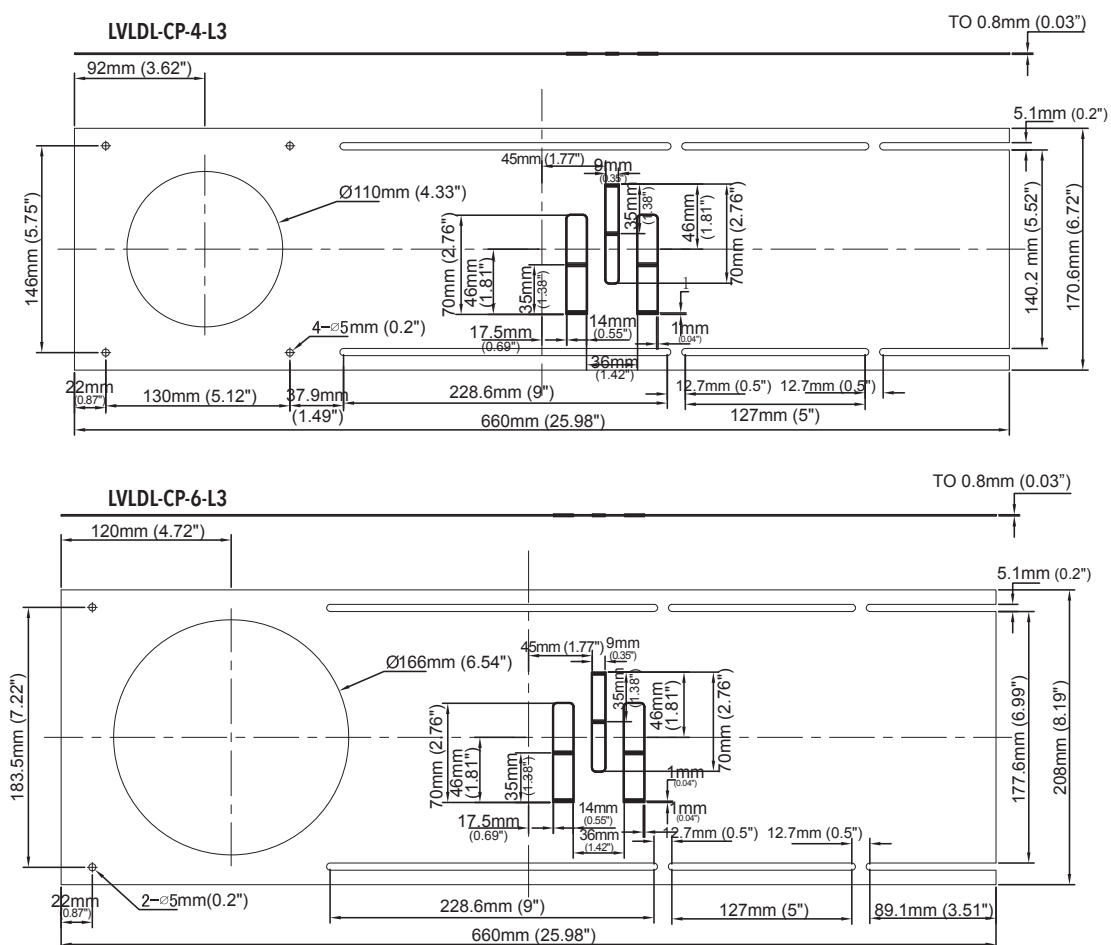

# High Power Thin-line LED Down Lights

High Power Thin-line LED Down Lights are a breakthrough in LED down light technology. Clever placement of SMD2835 LEDs around our diffusing glass lens provide brilliant and efficient LED lighting from a fixture that is only 1" (25mm) thick. High Power Thin-line LED Down Lights are designed for retrofit and new construction installations and are very simple to install. They are ideal for shallow ceiling plenums since no IC can or box is required above the fixture.



## FEATURES

- Energy Star rated - up to 80% energy savings
- Dimmable to 5% with most ELV dimmers
- 120° beam spread
- Warm White and Neutral White color temperatures
- Two spring loaded clips to attach to any ceiling material
- cETLus listed for damp locations
- No IC can required, for direct contact with insulation and combustible materials
- Connects directly to 120V power supply
- Optional 347V Step-Down Transformer (non-dimmable)
- 50,000 hour life
- 5 year limited warranty
- Airtight
- cETLus and Energy Star listed

## RESIDENTIAL APPLICATIONS

- Kitchens
- Pantries
- Laundry rooms
- Under soffits (outdoor)

## COMMERCIAL APPLICATIONS

- Lobbies
- Hallways
- Banquet halls
- Elevators
- Stairways
- Retail
- Restaurants
- Office lighting
- Under cabinet
- In cabinet
- Wall mount for egress lighting
- Under soffits (outdoor)

## SPECIFICATIONS

Electrical	Input: AC 100 - 120V
	4" = 11W, 42V DC, 280mA constant current
	6" = 15W, 42V DC, 350mA constant current
Number of SMD2835 LEDs	4" = 72
	6" = 120
	8" = 192
LED Life	50,000 hours
Lumen Output	4" = 1068 WW, 1072 NW
	6" = 1425 WW, 1483 NW
	8" = 2575 WW, 2648 NW
Lumen Efficacy (LPW)	4" = 97 WW, 97 NW
	6" = 95 WW, 99 NW
	8" = 103 WW, 106 NW
Color Temperature	3000K / 4000K
CRI	> 80
Approvals	cETLus listed for damp locations, Energy Star rated

NOTE: Each fixture ships with one constant current power supply.

## PRODUCT CODES

**LVL**DL - **HP** - **XX** - **YY** - **WH** - R

High Power  
Thin-line LED  
Down Light

SIZE  
04 - 4"  
06 - 6"  
08 - 8"

LED Color  
WW - 3000K  
NW - 4000K


TRIM Color  
WH - White Gloss  
Enamel

STEP-DOWN  
TRANSFORMERS  
**DLT-277**


Step-down transformer  
277/120V AC 25VA  
(non-dimmable)





### 4" High Power Thin-line LED Down Light

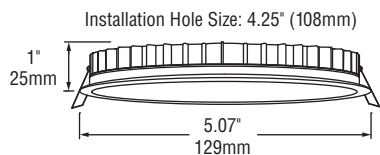

### 6" High Power Thin-line LED Down Light


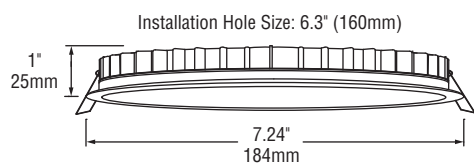


### 8" High Power Thin-line LED Down Light

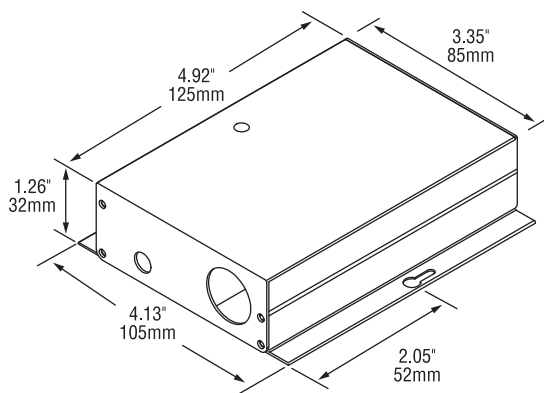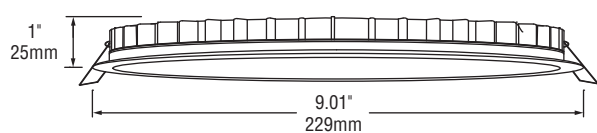

High Power Remote Driver

## CONSTRUCTION PLATES

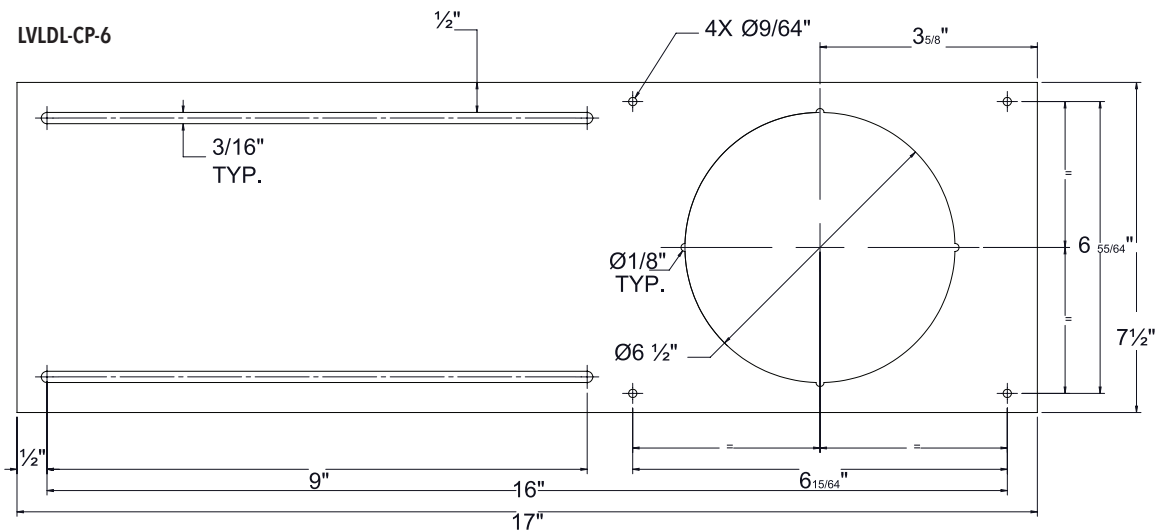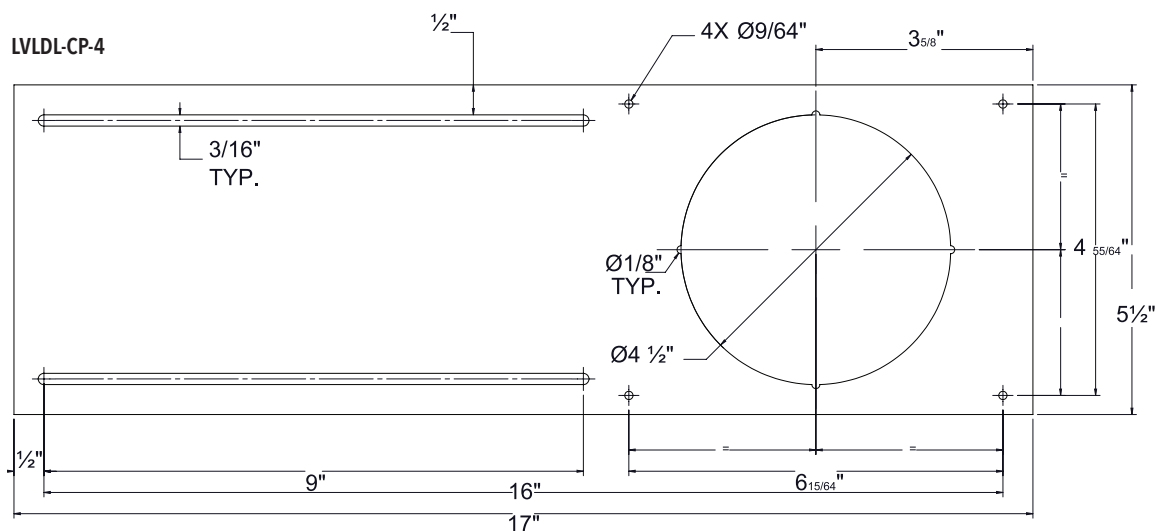

# LED Gimbal Down Lights

Our new and improved directional LED Gimbal Down Lights, are the perfect solution for a multitude of residential and commercial applications. The adjustable LED gimbal fixtures are 80% more efficient than incandescent luminaires and they are available in multiple trim finish options to match any style of décor.

## GDL-3

### FEATURES

- Energy efficient – up to 80% energy savings
- High Brightness COB LED's
- Low power consumption
- Warm White and Neutral White color temperatures
- Available in two beam angles
- New Construction, IC and remote installations
- cETLus listed for direct contact with insulation and combustible materials
- Easy to install, modular design
- 50,000 hour life
- 3 year limited warranty

### RESIDENTIAL APPLICATIONS

- Kitchens
- Pantries
- Laundry rooms
- Bathrooms

### COMMERCIAL APPLICATIONS

- Lobbies
- Hallways
- Elevators
- Stairways
- Retail
- Restaurants
- Office lighting

### PRODUCT CODES

**GDL - 3 - 9W - ZZ - XX - YY**

LED	BEAM ANGLE	LED Color	TRIM FINISH
Gimbal	25° - 25°	WW - 3000K	WH - White Gloss Enamel
Down	36° - 36°	NW - 4000K	BK - Black
Light			BZ - Bronze
			SN - Satin Nickel


Note : WH finish is stock, all other options are special order, MOQ required.




### SPECIFICATIONS

Power Consumption	9W
Input Voltage	21V DC*, 320mA constant current
Beam Angle	25/36°
Color Temperature	
WW	3000K
NW	4000K
Lumens	
WW	650
NW	700
Size (mm)	43 X 95.5
Approvals	cETLus listed for damp locations

\* Each fixture ships with one constant current power supply.

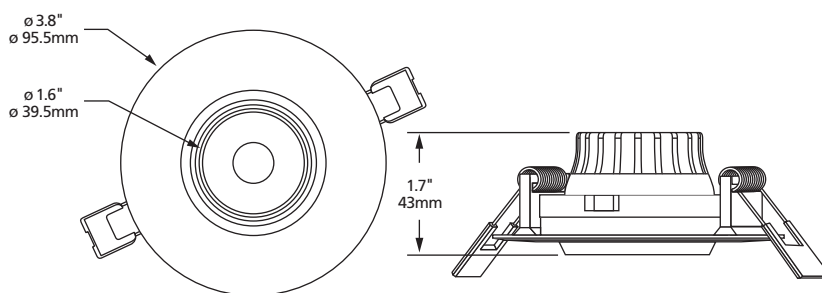

### LVLDL-CP-3

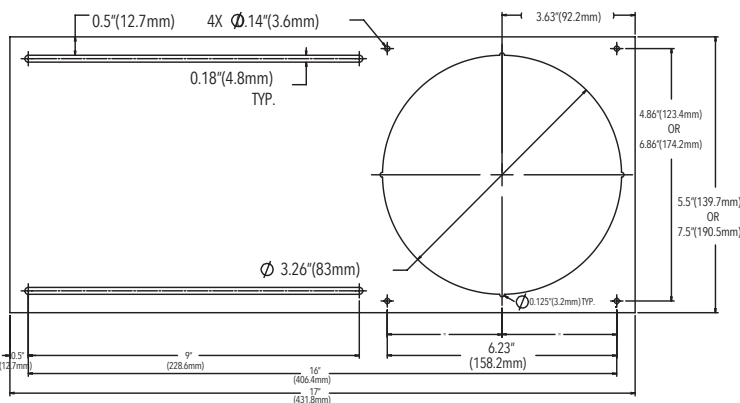

# LED Gimbal Down Lights

Our new and improved directional LED Gimbal Down Lights, are the perfect solution for a multitude of residential and commercial applications. The adjustable LED gimbal fixtures are 80% more efficient than incandescent luminaires and they are available in multiple trim finish options to match any style of décor.

## GDL-4



### FEATURES

- Energy efficient – up to 80% energy savings
- High Brightness COB LED's
- Low power consumption
- Warm White and Neutral White color temperatures
- Available in two beam angles
- New Construction, IC and remote installations
- cETLus listed for direct contact with insulation and combustible materials
- Easy to install, modular design
- 50,000 hour life
- 3 year limited warranty

### RESIDENTIAL APPLICATIONS

- Kitchens
- Pantries
- Laundry rooms
- Bathrooms

### COMMERCIAL APPLICATIONS

- Lobbies
- Hallways
- Elevators
- Stairways
- Retail
- Restaurants
- Office lighting

### PRODUCT CODES

**GDL - 4 - 12W - ZZ - XX - YY**

**LED**  
Gimbal  
Down  
Light

**BEAM ANGLE**  
25 - 25°  
36 - 36°

**LED Color**  
WW - 3000K  
NW - 4000K


**TRIM FINISH**  
WH - White Gloss  
Enamel  
BK - Black  
BZ - Bronze  
SN - Satin Nickel

Note : WH finish is stock, all other options are special order, MOQ required.


### SPECIFICATIONS

Power Consumption	12W
Input Voltage	30V DC*, 320mA constant current
Beam Angle	25/36°
Color Temperature	
WW	3000K
NW	4000K
Lumens	
WW	870
NW	930
Size (mm)	50 X 129.5
Approvals	cETLus listed for damp locations

\* Each fixture ships with one constant current power supply.

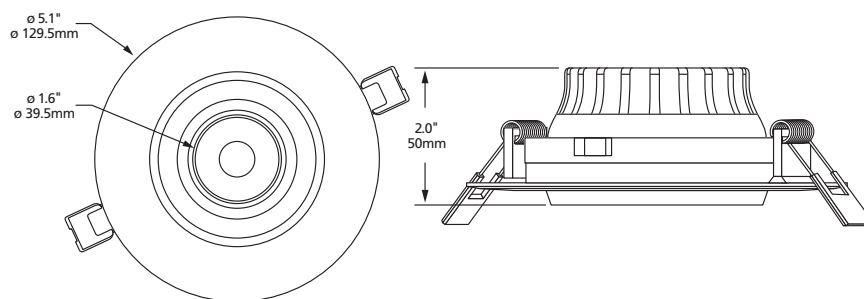

### LVLDL-CP-4

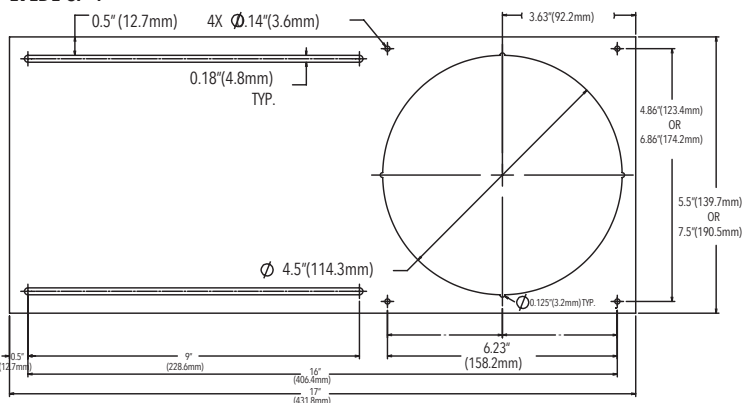

# Round LED Surface Mount Down Lights

LED Surface Mount Down Light is a low-profile down light intended for ceiling mount applications. Features driver on board (DOB) technology, with no external driver needed. These flush mount LED ceiling lights mount directly into a 4" junction box. Ideal for general LED Lighting in residential and commercial applications.



## FEATURES

- Driver on Board Technology, provides a 120V alternating current source and eliminates the need for traditional LED driver
- Quick & easy to install on standard junction box, ceiling mount with mounting plate
- Temperature rating: -20°C-40°C
- Die-cast aluminum housing
- Smooth and continuous dimming, dimmable with most ELV dimmers
- Rated for 50,000 hours
- No light bulbs to replace or dispose
- Instant full brightness (including in sub-zero temperatures)
- 80+ CRI
- cETLus listed for wet locations
- 5 year limited warranty

## RESIDENTIAL APPLICATIONS

- Kitchens
- Pantries
- Laundry rooms
- Under soffits (outdoor)

## COMMERCIAL APPLICATIONS

- Lobbies
- Hallways
- Banquet halls
- Elevators
- Stairways
- Retail
- Restaurants
- Office lighting
- Under cabinet
- In cabinet
- Wall mount for egress lighting
- Under soffits (outdoor)

## SPECIFICATIONS

	LVLDL-SR-06-XX-WH-L	LVLDL-SR-08-XX-WH-L	LVLDL-SR-10-XX-WH-L	LVLDL-SR-12-XX-WH-L
LED Color	White			
Color Temperature CCT	3000K / 4000K			
Input Voltage	120V			
Power Consumption (W)	11	14	17	22
Lumens				
WW	880	1000	1200	1800
NW	900	1050	1250	1850
Luminous Efficacy (LPW)				
WW	80	71	70	82
NW	82	75	73	84
Color Rendering Index	>80			
Dimmable	Yes			
Life Span (hours)	50,000 hrs			
LEDs	Epistar			
Appearance Size	6" D x 1" H (152mm D x 25mm H)	8" D x 1" H (203mm D x 25mm H)	10" D x 1" H (254mm D x 25mm H)	12" D x 1" H (305mm D x 25mm H)

## PRODUCT CODES

LVLDL - SR - YY - XX - WH - L

Round LED  
Surface Mount  
Down Light

SIZE  
06 - 6"  
08 - 8"  
10 - 10"  
12 - 12"


LED Color  
WW - 3000K  
NW - 4000K

ROUND TRIM RINGS (Sold Separately)

LVLDL - SR - **06** - TR - **XX** - L  
LVLDL - SR - **08** - TR - **XX** - L  
LVLDL - SR - **10** - TR - **XX** - L  
LVLDL - SR - **12** - TR - **XX** - L


TRIM RING FINISH

BK - Black  
BZ - Bronze  
BN - Brushed Nickel

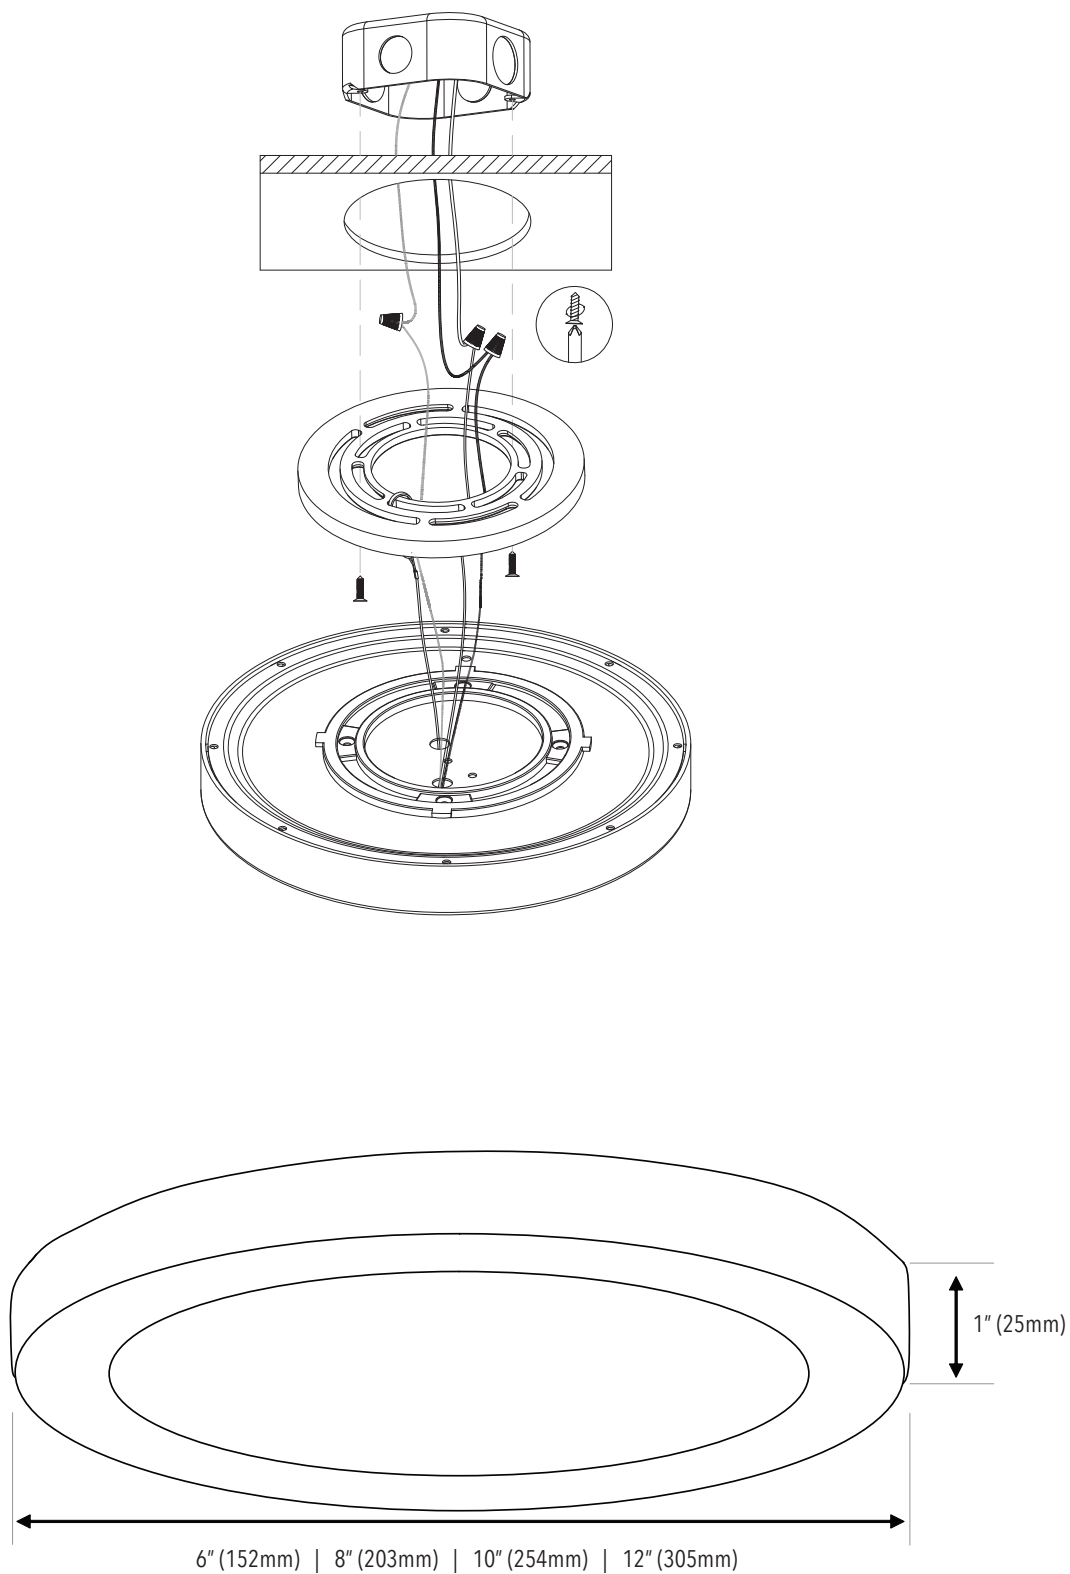

# Square LED Surface Mount Down Lights

LED Surface Mount Down Light is a low-profile down light intended for ceiling mount applications. Features driver on board (DOB) technology, with no external driver needed. These flush mount LED ceiling lights mount directly into a 4" junction box. Ideal for general LED Lighting in residential and commercial applications.

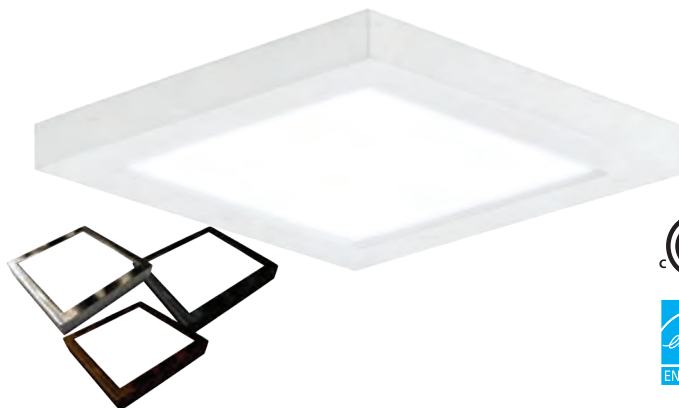

## FEATURES

- Driver on Board Technology, provides a 120V alternating current source and eliminates the need for traditional LED driver
- Quick & easy to install on standard junction box, ceiling mount with mounting plate
- Die-cast aluminum housing
- Smooth and continuous dimming, dimmable with most ELV dimmers
- Temperature rating: -20°C-40°C
- No light bulbs to replace or dispose
- Instant full brightness (including in sub-zero temperatures)
- 80+ CRI
- cETLus listed for wet locations
- Interchangeable brushed nickel, black and bronze trim rings available (sold separately)

## RESIDENTIAL APPLICATIONS

- Kitchens
- Pantries
- Laundry rooms
- Under soffits (outdoor)

## COMMERCIAL APPLICATIONS

- Lobbies
- Hallways
- Banquet halls
- Elevators
- Stairways
- Retail
- Restaurants
- Office lighting
- Under cabinet
- In cabinet
- Wall mount for egress lighting
- Under soffits (outdoor)

## SPECIFICATIONS

	LVLDL-SS-06-XX-WH-L	LVLDL-SS-08-XX-WH-L	LVLDL-SS-10-XX-WH-L	LVLDL-SS-12-XX-WH-L
LED Color	White			
Color Temperature CCT	3000K / 4000K			
Input Voltage	120V			
Power Consumption (W)	11	14	17	22
Lumens				
WW	880	1000	1200	1800
NW	900	1050	1250	1850
Luminous Efficacy (LPW)				
WW	80	71	70	82
NW	82	75	73	84
Color Rendering Index	>80			
Dimmable	Yes			
Life Span (hours)	50,000 hrs			
LEDs	Epistar			
Appearance Size	6" D x 1" H (152mm D x 25mm H)	8" D x 1" H (203mm D x 25mm H)	10" D x 1" H (254mm D x 25mm H)	12" D x 1" H (305mm D x 25mm H)

## PRODUCT CODES

LVLDL - SS - YY - XX - WH - L

Square LED  
Surface Mount  
Down Light

SIZE  
06 - 6"  
08 - 8"  
10 - 10"  
12 - 12"



LED Color  
WW - 3000K  
NW - 4000K

SQUARE TRIM RINGS (Sold Separately)

LVLDL - SS - 06 - TR - XX - L  
LVLDL - SS - 08 - TR - XX - L  
LVLDL - SS - 10 - TR - XX - L  
LVLDL - SS - 12 - TR - XX - L


TRIM RING FINISH

BK - Black  
BZ - Bronze  
BN - Brushed Nickel

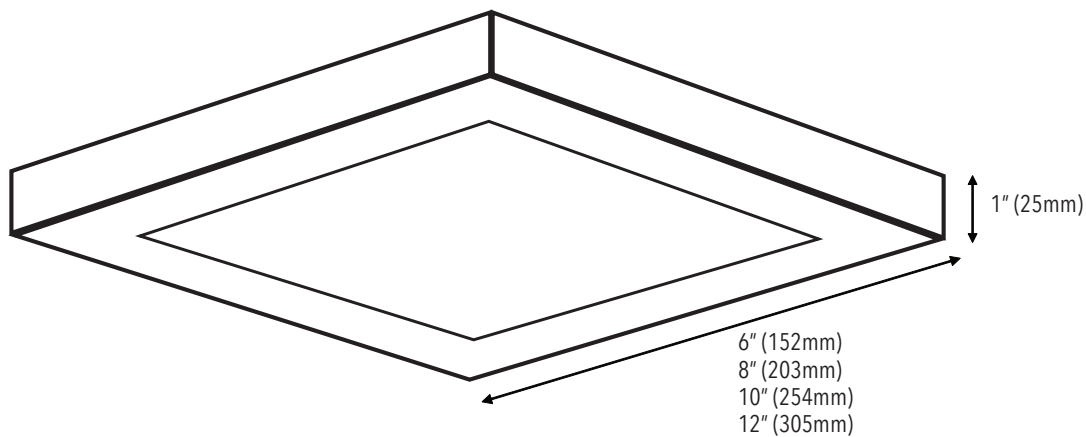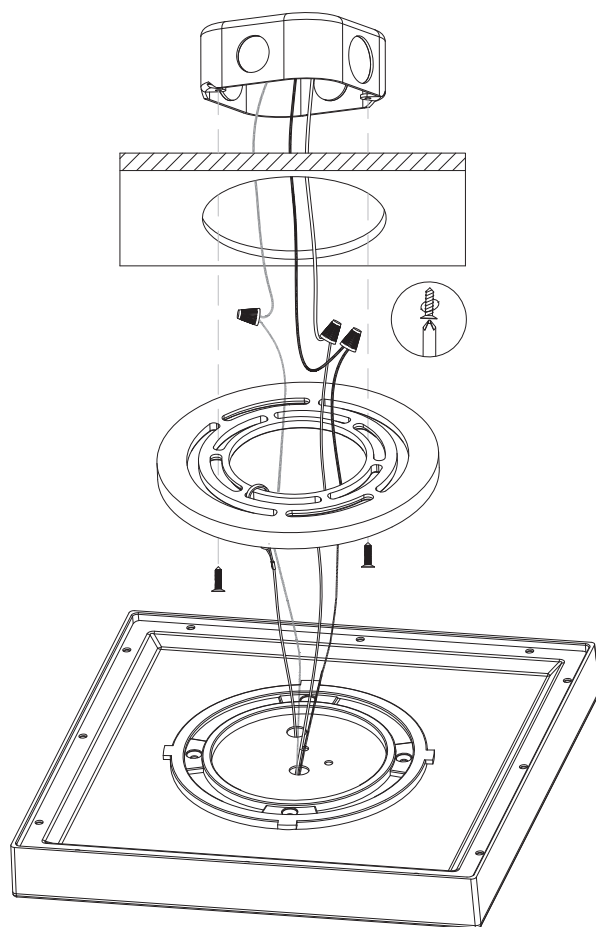

# T-LED Edge Light

T-LED Edge Light is an innovative solution for general and accent lighting in offices, hallways and commercial applications. Its perimeter illumination offers a unique edge lit look, replacing the traditional flat panels and troffers at a fraction of the cost.

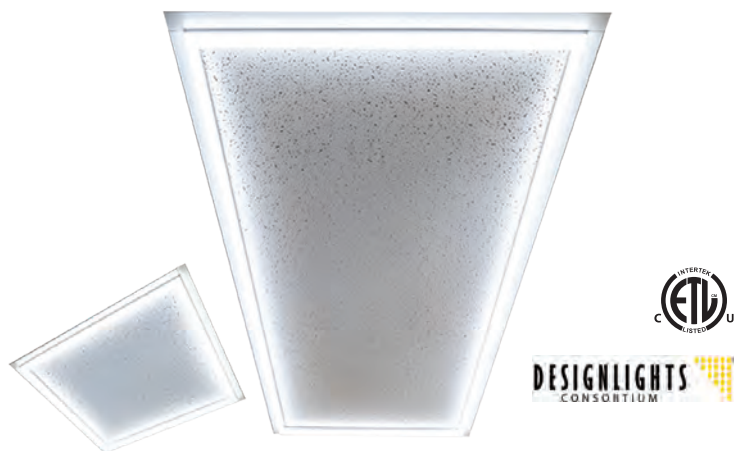

## FEATURES

- Ideal replacement for traditional flat panels and troffers at a fraction of the cost
- Non-flicker, no dark spots
- Installs in minutes
- AC100-277V, 0-10V dimmable
- cETLus, DLC premium
- Ambient temperature: -20°C - 45°C
- Available in 2X2 and 2X4 versions
- Available in 3000K and 4000K
- Dry locations
- 5 year limited warranty

## APPLICATIONS

- Retail
- Offices
- Hallways
- Elevators
- Banquet Halls
- Restaurants

## SPECIFICATIONS

Color Temperature	3000K or 4000K
Input Voltage	AC100-277V
Power Consumption (W)	2X2=40 Watts 2X4=55 Watts
Lumen Output	2X2=4800LM 2X4=6600LM
LED Type	Integral SMD 2835 LEDs
Luminous Efficacy	120 Lumens per watt
Beam angle	120°
Color Rendering Index	>80
LED Life (hours)	50,000
Dimmable	0-10V
Approvals	cETLus, DLC

## PRODUCT CODES

TLE - **2X2 - 40 - 30**

TLE - **2X2 - 40 - 40**

TLE - **2X4 - 55 - 30**

TLE - **2X4 - 55 - 40**

SIZE      WATTS      Color TEMPERATURE

EXTENSION CORDS  
(for remote driver placement)



**TLE-EX-10**

10 Ft extension cord

**TLE-EX-30**

30Ft extension cord



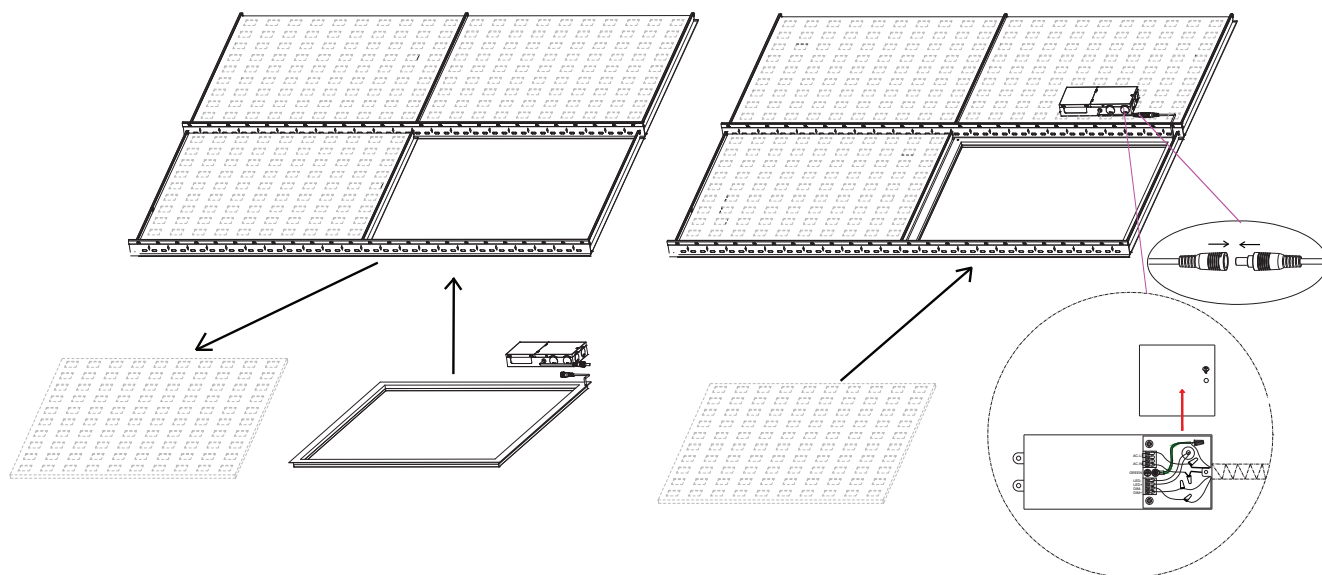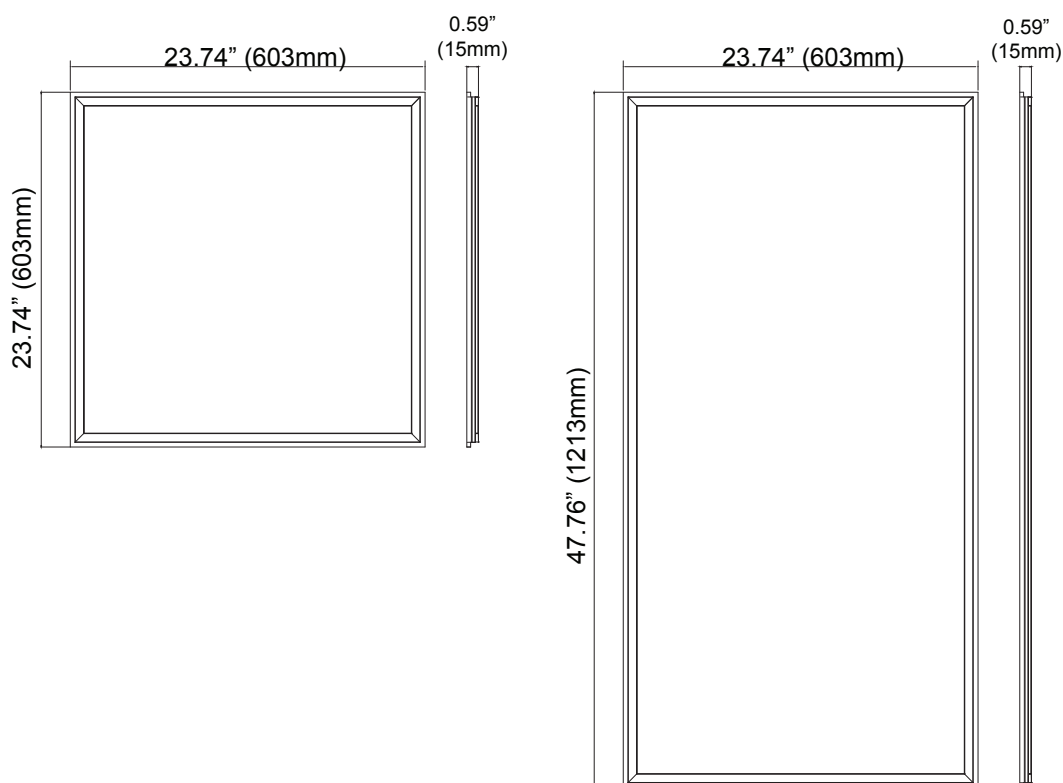

## ACCESSORIES



### TLE-DM

Driver mount bracket (for mounting the bracket to the T-BAR)



### TLE-MC

Mounting clips (for fixture wire suspension)



### YT20E-XXL

Emergency LED Driver  
Input voltage: 120-277V AC  
Output voltage: 30-60V DC  
Output power: 20W  
Emergency functioning time: >1.5 hours  
Dimensions: 17.7"x1.26"x0.83" (450mm x 32mm x 21mm)

NOTE: driver mount bracket (TLE-DM), and mounting clips (TLE-MC) are available (sold separately). Please check your local building codes, if these accessories are required.

# T-LED Edge Light CCT

T-LED Edge Light CCT is an innovative solution for general and accent lighting in offices, hallways and commercial applications. Its perimeter illumination offers a unique edge lit look, replacing the traditional flat panels and troffers at a fraction of the cost. Our CCT and wattage adjust features make T-LED all the more versatile.

AC100-277V, 0-10V dimmable technology that offers an ideal replacement for traditional flat panels and troffers.

## FEATURES


- Ideal replacement for traditional flat panels and troffers at a fraction of the cost
- Non-flicker, no dark spots
- Installs in minutes
- AC100-277V, 0-10V dimmable
- cETLus, DLC premium
- Ambient temperature: -20°C - 45°C
- Available in 2X2 and 2X4 versions
- Adjustable wattage: 2X2: 20W/30W/40W  
2X4: 40W/50W/60W
- Adjustable color temperature: 3500K/4000K/5000K
- Dry locations
- 5 year limited warranty

## APPLICATIONS

- Retail
- Offices
- Hallways
- Elevators
- Banquet Halls
- Restaurants


## PRODUCT CODES

TLE-2X2-K40-3050  
TLE-2X4-K60-3050

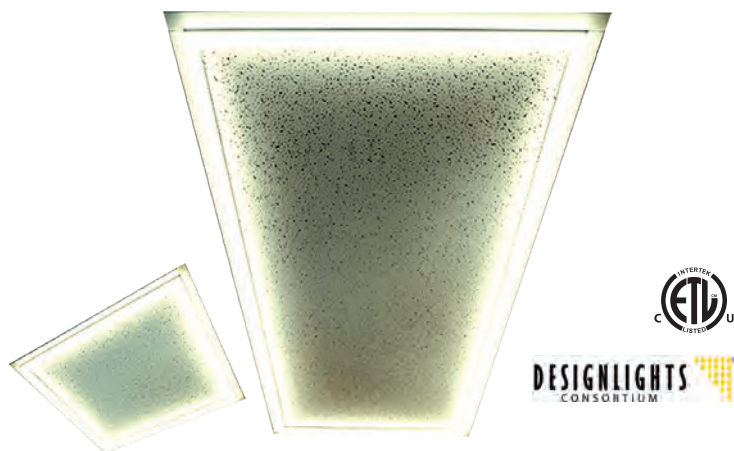


## SPECIFICATIONS

Color Temperature	3500/4000/5000K adjustable
Input Voltage	AC100-277V
Power Consumption (W)	2X2=20/30/40 watts adjustable 2X4=40/50/60 watts adjustable
Lumen Output	2X2=2200-4400LM 2X4=4400-6600LM
LED Type	Integral SMD 2835 LEDs
Luminous Efficacy	120 Lumens per watt
Beam angle	120°
Color Rendering Index	>80, >95 for 3500K
LED Life (hours)	50,000
Dimmable	0-10V
Approvals	cETLus, DLC

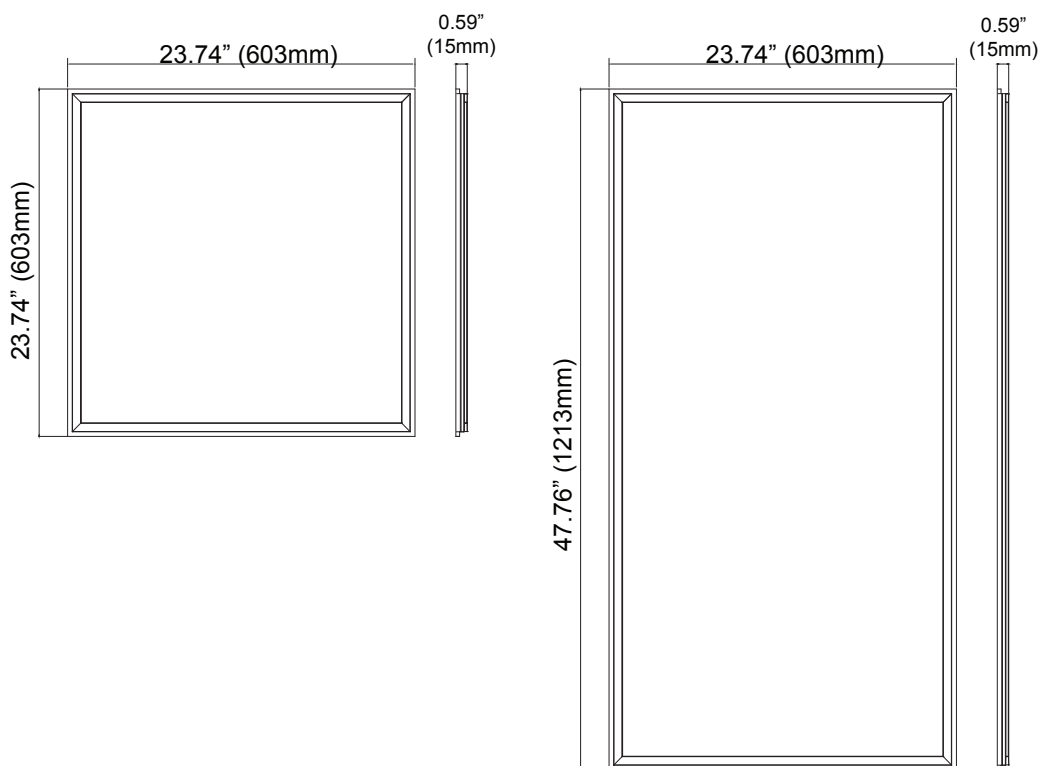

- Easy installation:
1. Remove existing ceiling tile.
  2. Place T-LED Edge Light in T Bar ceiling frame and connect to power.
  3. Replace ceiling tile.

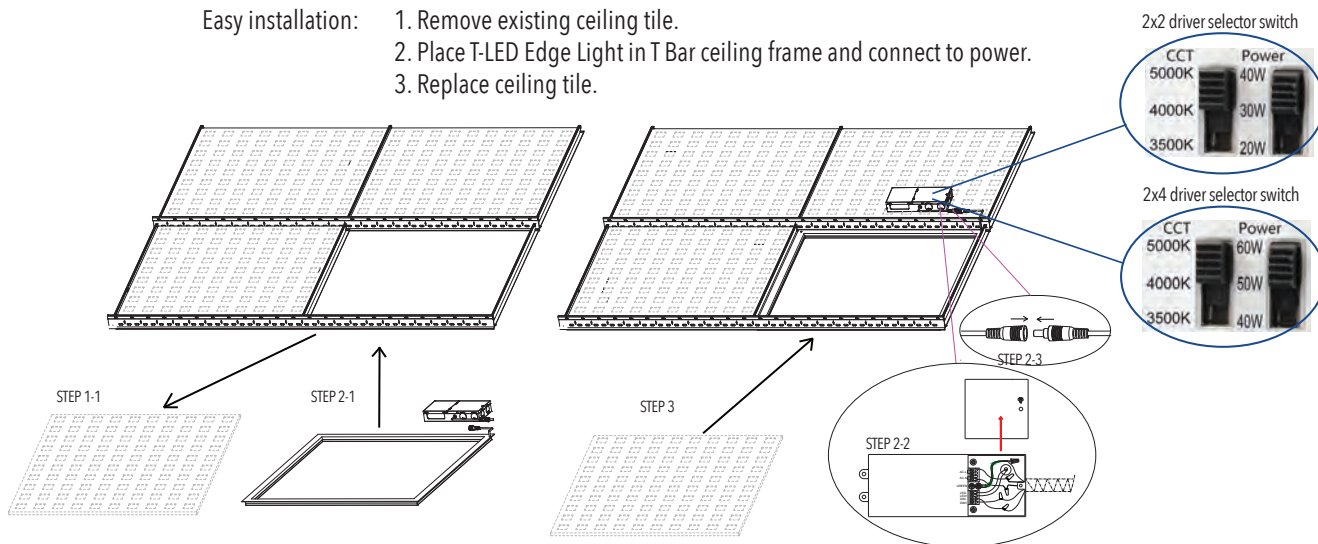

## ACCESSORIES



### TLE-DM

Driver mount bracket (for mounting the bracket to the T-BAR)



### TLE-MC

Mounting clips (for fixture wire suspension)



UL US  
LISTED  
E493915

### YT20E-XXL

Emergency LED Driver  
Input voltage: 120-277V AC  
Output voltage: 30-60V DC  
Output power: 20W  
Emergency functioning time: >1.5 hours  
Dimensions: 17.7"x1.26"x0.83" (450mm x 32mm x 21mm)

NOTE: driver mount bracket (TLE-DM), and mounting clips (TLE-MC) are available (sold separately). Please check your local building codes, if these accessories are required.

# Tri-Proof Lights

Tri-Proof Lights are an attractive and durable lighting solution that can replace traditional linear fluorescent luminaires. Tri-Proof Lights are extremely rugged, resistant to heavy impacts, dust proof, water proof and vandal resistant making them ideal for environments such as factories, warehouses, parking garages and car washes yet stylish enough for commercial and residential applications like stairwells, hallways, schools, supermarkets, apartment and condo complexes.



## FEATURES

- Water-proof (IP66), Dust-proof, Pressure-proof (IK10)
- Luminous Efficacy (LPW): 110-120
- Available in 4 ft. length / 40W version
- Excellent heat dissipation
- 50,000 hours life
- Energy efficient - up to 80% energy savings
- Operating Temperature -22°F - 113°F (-30°C - 45°C)
- Vandal Resistant
- cETLus
- 5 year limited warranty

## APPLICATIONS

- Parking garages
- Tunnels
- Airports
- Exhibition halls
- Railway, bus and subway stations
- Warehouses and factories
- Supermarkets
- Schools

## PRODUCT CODES

**SL66** - 4FT - 40W - **XX**





Note: MOQ may apply.

## SPECIFICATIONS


Electrical	100-240V/277V
Working Voltage	34-40V DC, 40W
Power Efficiency	90%
LEDs	High bright SMD2835
Number of LEDs	240
Luminous Efficacy	110-120 LM/W
THD	< 15%
CRI	> 80
Beam Angle	120°
Approvals	cETLus listed

\* Each fixture ships with two strain relief connectors


Dimensions

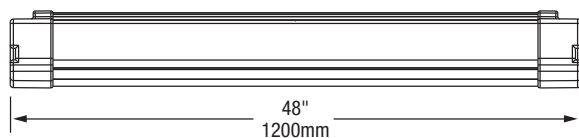



Surface Ceiling Mounting (Standard)

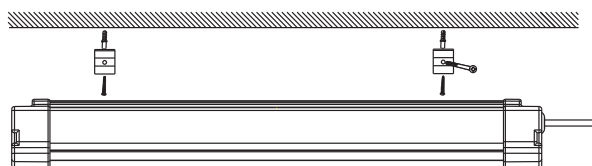

Swivel Mount Kit  
(Part# SL66-AD-MC) Sold Separately

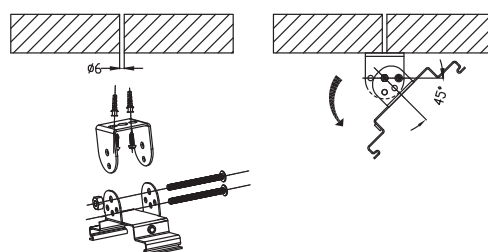

Suspended Mounting (Suspension Kit - Part# SL66-SUS-KIT) Sold Separately

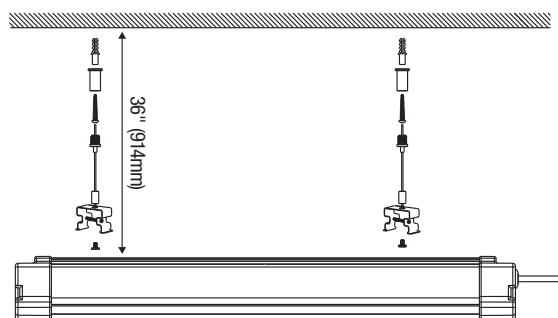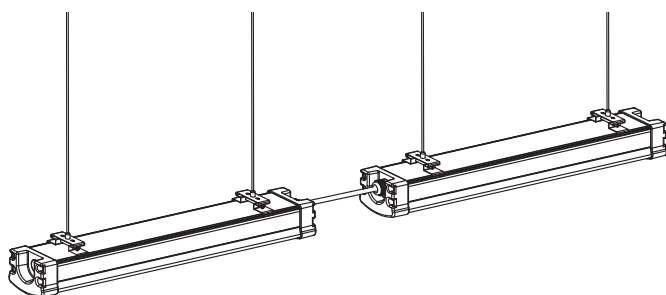

# 100W LED Work Light

The LED Work Light is an energy savings, impact resistant long life temporary lighting solution for illuminating workplaces, shops, garages, and warehouses.



## FEATURES

- Spring Loaded Hook
- 10ft power cord with plug
- 6KV/10KV surge protection
- Hidden, built-in hidden socket
- Eye-catching housing
- Stainless steel guard
- Epistar LEDs
- Hollow Heat Sink
- Silicone gaskets for damp location use
- 5 year limited warranty


## PRODUCT CODES

LWL-100W-50

## SPECIFICATIONS

Electrical	AC100-277V, 100W, 50-60Hz
Surge Protection	6KV
Driver	Internal Driver
LEDs	Epistar 2835
Number of LEDs	408
Life Span	50,000 hours
Lumen Output	12,500 lumens
Luminous Efficacy	125 LM/W
CRI	>80
CCT	5000 K
Beam Angle	360°
Dimensions	6.5" x 11.5" H (165 mm x 292 mm)
Net Weight	2.8 kg
Approvals	DLC, cUL, listed for damp location

## Dimensions

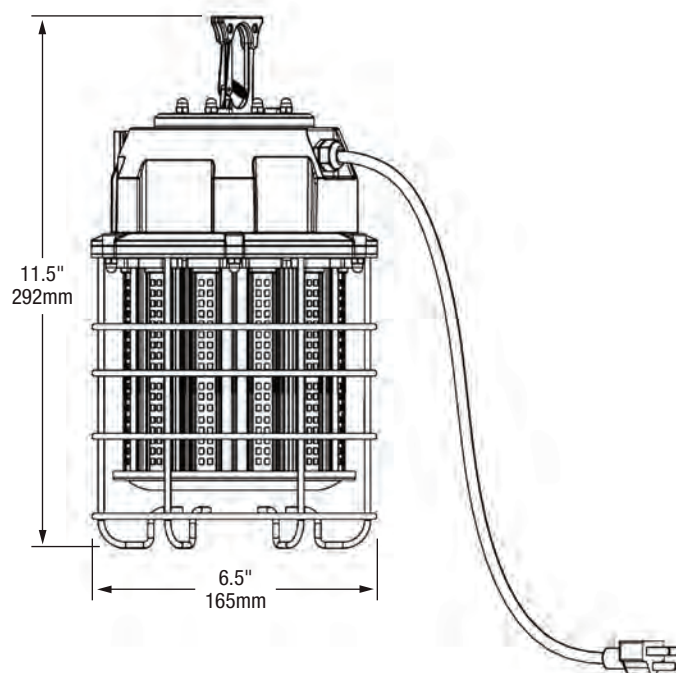

## ACCESSORIES



**LWL-MM**  
Magnet mount kit



**LWL-FM**  
Floor mount kit



**LWL-TM**  
Tripod mount kit

# 60W LED Work Light

60W LED Work Light offers energy-saving, impact-resistant, long-life, temporary lighting solutions for illuminating construction sites, shops, garages, and warehouses.



## FEATURES


- 5ft power cord with plug
- Lumen output: 7200LM
- Built-in hidden socket
- Up to 10 LED Work Lights per 120V AC tap
- Stainless steel guard
- LED color: 5000K
- Damp locations
- 5 year limited warranty
- Optional tripod, floor mount and magnet mount accessories

## PRODUCT CODES

LWL-60W-50

## SPECIFICATIONS

Electrical	AC120V, 60W, 50-60Hz
CRI	>80
LED Lifetime	50,000 hrs.
CCT	5000K
Lumen (lm)	7,200
Luminous Efficacy	120 LM/W
Appearance Size	5.12"W x 10.4"H (130mm x 265mm)
Approvals	cETLus

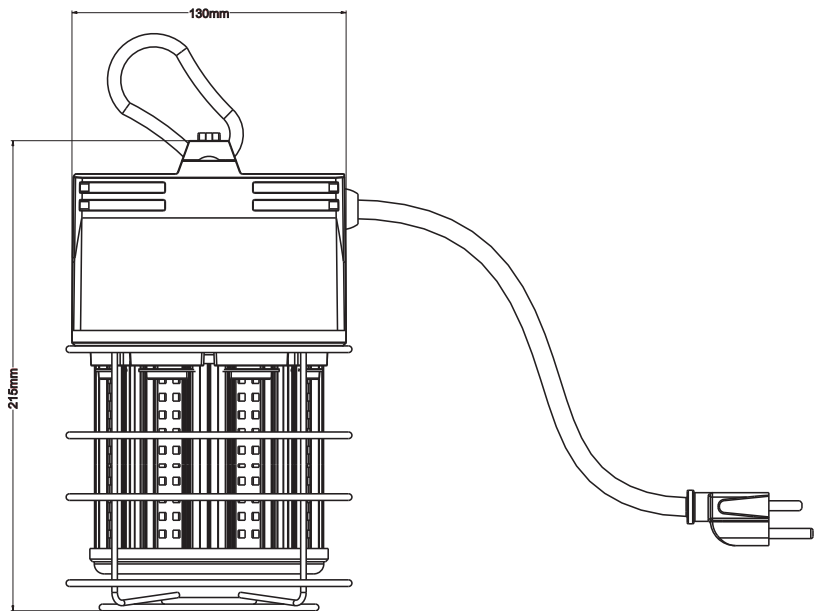



# LED String Work Light

5 x 8 watts LED fixtures in a 50FT string to illuminate your construction site, shop, garage or warehouse with portable, efficient lighting.



## FEATURES


- Length: 50ft
- Lumen output: 5000LM
- Wet locations
- LED color: 5000K
- 40 Watts per string
- Up to 10 LED String Work Lights per 120V AC tap
- Metal wire guard around each fixture
- Carabiner clip on each fixture
- 5 year limited warranty

## PRODUCT CODES

SWL-40W-50

## SPECIFICATIONS

Electrical	AC120V, 60W, 50-60Hz
CRI	>80
LED Lifetime	50,000 hrs.
CCT	5000K
Lumen (lm)	5,000
Luminous Efficacy	112.5 LM/W
Appearance Size	4.4"W x 3"H (112mm x 78mm)
Approvals	cETLus

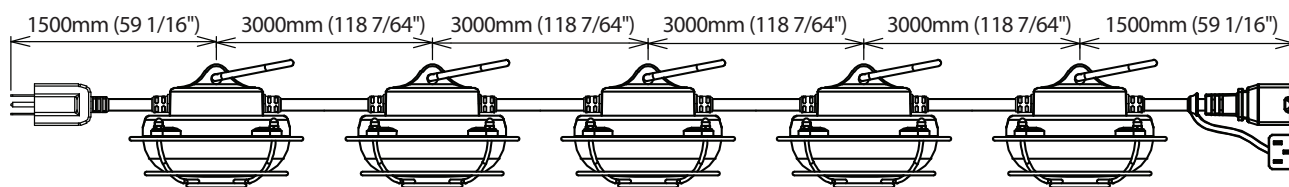

# LED Disc Light

A robust LED marker light ideal for public or residential applications, indoor or outdoor.



## FEATURES

- Fully dimmable with dimmable power supply (sold separately)
- Long life - 50,000 hours
- Low power consumption of 3 watts per fixture
- Safe 12 volt, Class 2 power supply (not included)
- Up to 30 fixtures per power supply
- cETLus listed for in-wall, IC ceiling, in-floor, outdoor wet, and outdoor burial applications
- Fits in any 1.5" diameter hole, 4" long
- No UV, no infrared, no radiated heat
- 3 year limited warranty


## APPLICATIONS

- Steps
- Aisles
- Paths
- Driveways
- Direction lighting
- Information lighting
- Decorative lighting
- Merchandising
- Landscape accents

## PRODUCT CODES


### ROUND

#### LEDD - Y - XX

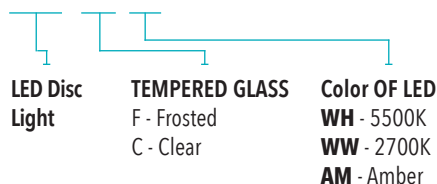

### SQUARE

#### LEDD - Y - XX - SQ

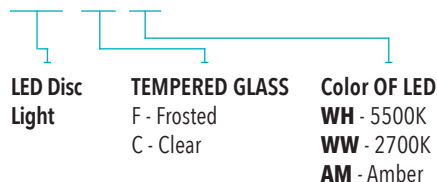

## SPECIFICATIONS

Electrical	12V DC, 3.0W
Wiring Options	Fixtures can be parallel wired or "Daisy chained" together with up to 18 fixtures on our largest driver. See adjacent power supply chart for details. NOTE: Use LW-18G-CL2 for all in-wall applications. Use LW-18G-BUR for all burial applications.
LED Specs	5050
LED Life	50,000 hours
Lumen Output and Color Options	WH 98 lumens @ 5500K WW 95 lumens @ 2700K
CRI	> 80
Cover Finish	Stainless Steel
Barrel Finish	Stainless Steel
Lens	Frosted or Clear Tempered Glass
Approvals	cETLus listed and labeled for wet, IC, ceiling, wall and direct burial applications.

## REPLACEMENT LED MODULES

### LEDD-MOD-WH

LED Disc Light module, 12V, white LED 5500K

### LEDD-MOD-WW

LED Disc Light module, 12V, warm white LED 2700K

## INSTALLATION WIRE


### LW-18G-BUR

For outdoor burial connections

### LW-18G-CL2

For indoor through wall connections

NOTE: One of the above wires MUST be used in order to maintain product warranty.

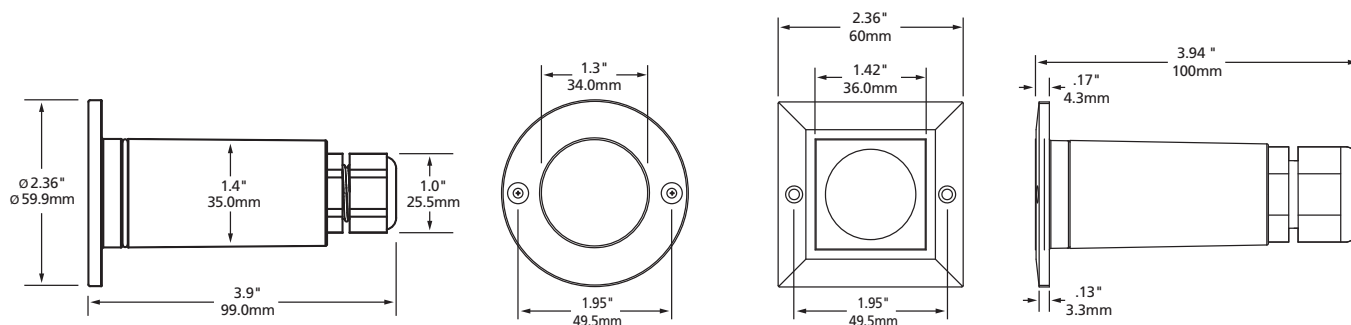

## ACCESSORIES



### LEDD-CF

LED Disc Light concrete form for concrete pour applications. Fits over most 3/4" conduit junction boxes.

### LEDD-CF-SQ

LED Disc Light Square concrete form for concrete pour applications. Fits over most 3/4" conduit junction boxes.

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE12L20DC

20 Watts

Max. recommended load 18 W or 6 LED Disc Lights

Min. recommended load 8 W or 3 LED Disc Lights

6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE12L60DC

60 Watts

Max. recommended load 54 W or 18 LED Disc Lights

Min. recommended load 8 W or 3 LED Disc Lights

6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

## NON DIMMABLE DRIVERS

### LEDDR-12-60W

Indoor/Outdoor driver

60W hardwire

Input: 100 - 240V AC


Output: 12V DC

Max. 18 LED Disc Lights

9 11/16" x 2 9/16" x 2 1/16" (246 x 65 x 52mm)

## 100% LED Light Output Chart


With every foot of lead wire and every light fixture, there is voltage loss. With too much voltage loss all light fixtures will not develop 100% of their potential output. Below is a chart of acceptable voltage loss which will maintain 100% of the potential light output of the LED Disc Light. Simply plot the number of LED Disc Light you wish to place on one lead on the horizontal axis, with the total distance from the LED Driver to the last LED Disc Light on the vertical axis. If the resulting plot is at or below the line shown, you will have acceptable voltage loss and your LED Disc Light will output 100% of their potential.

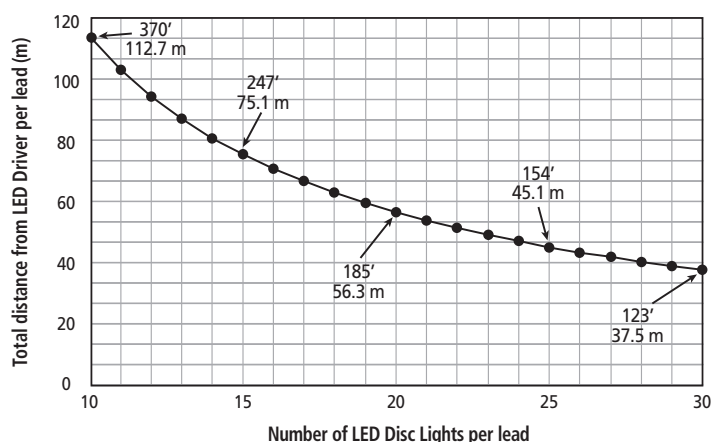

NOTE: No more than 18 LED Disc Lights per LEDDR-12-60W.



## WARNING: LACK OF DRAINAGE WILL VOID THE WARRANTY

To maintain the warranty, a proper drainage system **MUST** be installed (drainage material or drainage pipe), when the product is installed in soil or concrete.

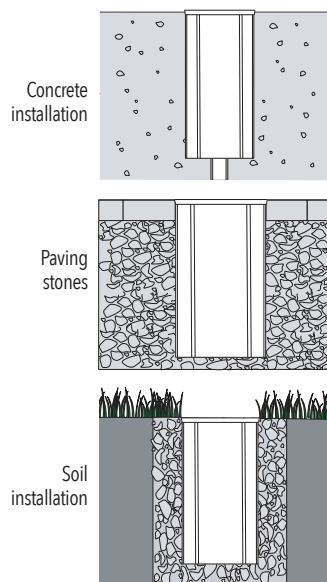

### Test drainage prior to installation.

A quantity of water equal to the volume of the mounting hole should drain in 15 minutes or less.

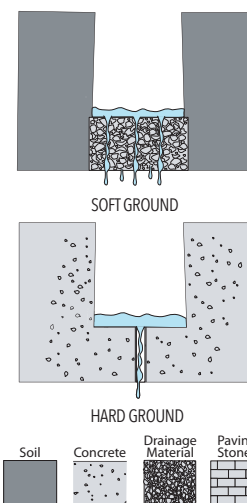

# LED Disc Light Dome

## STAINLESS STEEL CONSTRUCTION

A robust LED marker light ideal for public or residential applications, indoor or outdoor.

### FEATURES

- Dimmable with dimmable power supplies
- Long life - 50,000 hours
- Low power consumption 3 watts per fixture
- Safe 12 volt, Class 2 power supply (not included)
- Up to 30 fixtures per power supply
- cETLus listed for in-wall, in-floor, outdoor wet, and outdoor burial applications
- Fits in any 1.5" diameter hole, 4" long
- Stainless steel construction (SUS 316)
- Available concrete form for concrete pour applications
- 3 year limited warranty

### APPLICATIONS

- Steps
- Aisles
- Paths
- Driveways
- Direction lighting
- Decorative lighting
- Landscape accents

### PRODUCT CODES

**LEDD - C - XX - D**

LED Disc  
Light Dome

Color OF LED  
**WH** - 5500K  
**WW** - 2700K



### SPECIFICATIONS

Voltage	12V DC
Power Consumption (W)	3 watts
LED Life	50,000 hours
LED Colors	WH 98 lumens @ 5500K WW 95 lumens @ 2700K
Wiring Options	Fixtures can be parallel wired or "Daisy chained" together with up to 18 fixtures on our largest dimmable driver. <b>NOTE: Use LW-18G-CL2 for all in-wall applications. Use LW-18G-BUR for all burial applications.</b>
LED Life	50,000 hours
CRI	80+
Cover Finish	Stainless Steel SUS316
Barrel Finish	Stainless Steel SUS316
LED Type	5050
Lens	Clear Tempered Glass
Approvals	cETLus listed for wet, IC, wall and direct burial applications

### REPLACEMENT LED MODULES

#### LEDD-MOD-WH

LED Disc Light module, 12V, white LED 5500K

#### LEDD-MOD-WW

LED Disc Light module, 12V, warm white LED 2700K

### INSTALLATION WIRE


#### LW-18G-BUR

For outdoor burial connections

#### LW-18G-CL2

For indoor through wall connections

NOTE: One of the above wires MUST be used in order to maintain product warranty.

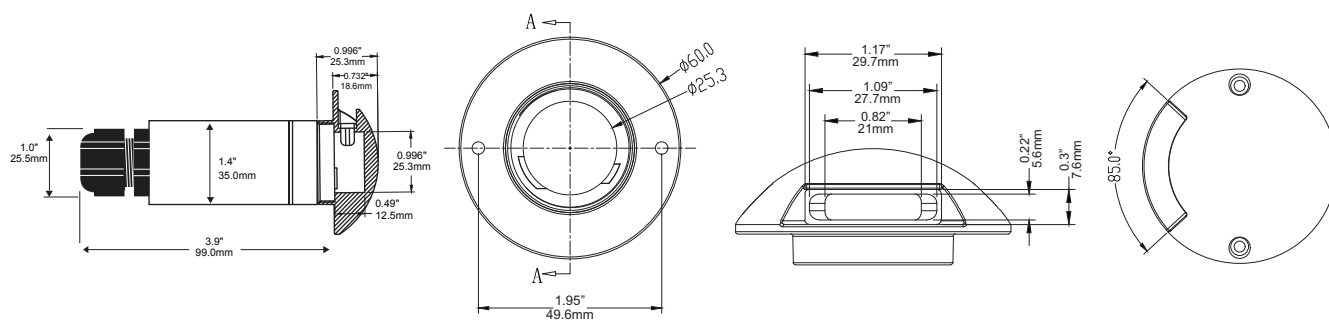

## ACCESSORIES



### LEDD-CF

Recommended for easy installation in concrete pour applications.

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE12L20DC

20 Watts

Max. recommended load 18 W or 6 LED Disc Lights

Min. recommended load 8 W or 3 LED Disc Lights

6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE12L60DC

60 Watts

Max. recommended load 54 W or 18 LED Disc Lights

Min. recommended load 8 W or 3 LED Disc Lights

6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

NOTE: For outdoor installations, please add E-KO-SR strain relief.

## NON DIMMABLE DRIVERS

### LEDDR-12-60W

Indoor/Outdoor driver

60W hardwire

Input: 100 - 240V AC


Output: 12V DC

Max. 18 LED Disc Lights

9 11/16" x 2 9/16" x 2 1/16" (246 x 65 x 52mm)


## WARNING: LACK OF DRAINAGE WILL VOID THE WARRANTY

To maintain the warranty, a proper drainage system **MUST** be installed (drainage material or drainage pipe), when the product is installed in soil or concrete.

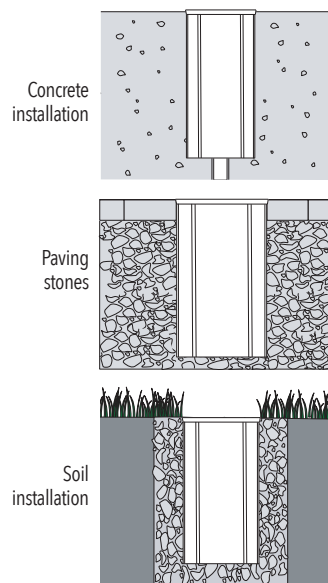

### Test drainage prior to installation.

A quantity of water equal to the volume of the mounting hole should drain in 15 minutes or less.

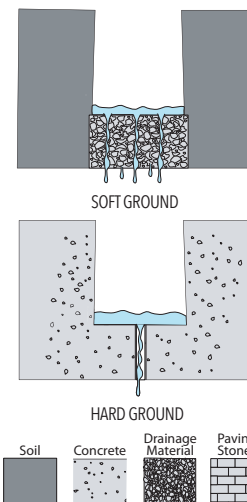

# LED MiniDisc Light

A robust LED marker light ideal for public or residential applications, indoor or outdoor.

## FEATURES

- Now dimmable on the primary power supply side with our new dimmable LED Drivers!
- Long life - 50,000 hours
- Low power consumption of 0.24 watts per fixture
- Safe 12 volt, Class 2 power supply (not included)
- Up to 100 fixtures per power supply
- cETLus listed for in-wall, IC ceiling, in-floor, outdoor wet, and outdoor burial applications
- Fits in any 1" diameter hole, 3 1/2" long
- 2 year limited warranty, 3 years on stainless steel

## APPLICATIONS

- Steps
- Aisles
- Paths
- Driveways
- Direction lighting
- Information lighting
- Decorative lighting
- Merchandising
- Landscape accents

NOTE: When installing Mini Disc Lights in harsh environments (such as limestone, salted areas, coastal environments, etc.) please use the stainless steel version to avoid the risk of corrosion to the body of the fixture.

## PRODUCT CODES

### ROUND

#### LEDMD - XX - YY

LED MiniDisc  
Light

**Color OF LED**  
**CW** - 5400K  
**WW** - 2900K  
**AM** - Amber  
**BL** - Blue  
**GR** - Green  
**RD** - Red

#### FINISH

**AL** - Aluminum  
**WH** - White  
**BZ** - Bronze  
**BK** - Black  
**SS** - Stainless Steel

### SQUARE

#### LEDMD - XX - YY - SQ

LED MiniDisc  
Light

**COLOR OF LED**  
**CW** - 5400K  
**WW** - 2900K  
**AM** - Amber  
**BL** - Blue  
**GR** - Green  
**RD** - Red

#### FINISH

**SS** - Stainless Steel



## SPECIFICATIONS

Electrical	12V DC, 20mA, 0.24W
Wiring Options	Each LED Driver can power up to 200 LED MiniDisc Lights by parallel wiring ("daisy chain") between fixtures. NOTE: Use LW-18G-CL2 for all in-wall applications. Use LW-18G-BUR for all burial applications.
LED Life	50,000 hours
LED Colors	CW 5400K, WW 2900K, Blue, Green, Amber, Red
Construction	Both cover and barrel are die cast aluminum or stainless steel for corrosion protection, strength, weight and consistency of finish
Cover Finish	Aluminum, White, Bronze, Black, Stainless Steel
Barrel Finish	Aluminum, White, Bronze, Black, Stainless Steel
Lens	Frosted Tempered Glass
Approvals	cETLus listed and labeled for wet, IC, ceiling, wall and direct burial applications.

## REPLACEMENT LED MODULES

### LCL-LEDMOD-CW

LED Mini Disc Light module, 12V, cool white LED 5400K

### LCL-LEDMOD-WW

LED Mini Disc Light module, 12V, warm white LED 2900K

## INSTALLATION WIRE





### LW-18G-BUR

For outdoor burial connections

### LW-18G-CL2

For indoor through wall connections

NOTE: One of the above wires MUST be used in order to maintain product warranty.

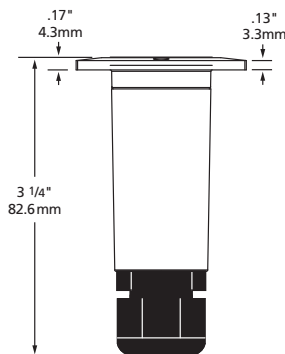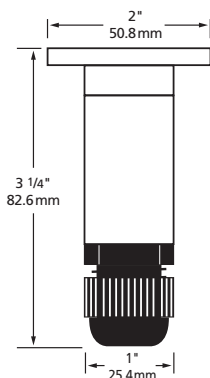

## ACCESSORIES



### LEDMD-CF

LED MiniDisc Light concrete form for concrete pour applications. Fits over most 1/2" (12.7mm) conduit junction boxes.

### LEDMD-CF-SQ

LED MiniDisc Light Square concrete form for concrete pour applications. Fits over most 1/2" (12.7mm) conduit junction boxes.

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE12L20DC

20 Watts

Max. recommended load 18 W or 75 LED MiniDisc Lights  
Min. recommended load 8 W or 34 LED MiniDisc Lights  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE12L60DC

60 Watts

Max. recommended load 54 W or 200 LED MiniDisc Lights  
Min. recommended load 8 W or 34 LED MiniDisc Lights  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

NOTE: For outdoor installations, please add E-KO-SR strain relief.

## NON DIMMABLE DRIVERS

### LEDDR-12-60W

Indoor/Outdoor driver

60W hardwire


Input: 100 - 240V AC

Output: 12V DC; Max. 200 MiniDisc Lights

9 11/16" x 2 9/16" x 2 1/16" (246 x 65 x 52mm)



## 100% LED Light Output Chart

With every foot of lead wire and every light fixture, there is voltage loss. With too much voltage loss all light fixtures will not develop 100% of their potential output. Below is a chart of acceptable voltage loss which will maintain 100% of the potential light output of the LED MiniDisc Light. Simply plot the number of LED MiniDiscs you wish to place on one lead on the horizontal axis, with the total distance from the LED Driver to the last LED MiniDisc on the vertical axis. If the resulting plot is at or below the line shown, you will have acceptable voltage loss and your LED MiniDisc will output 100% of their potential.

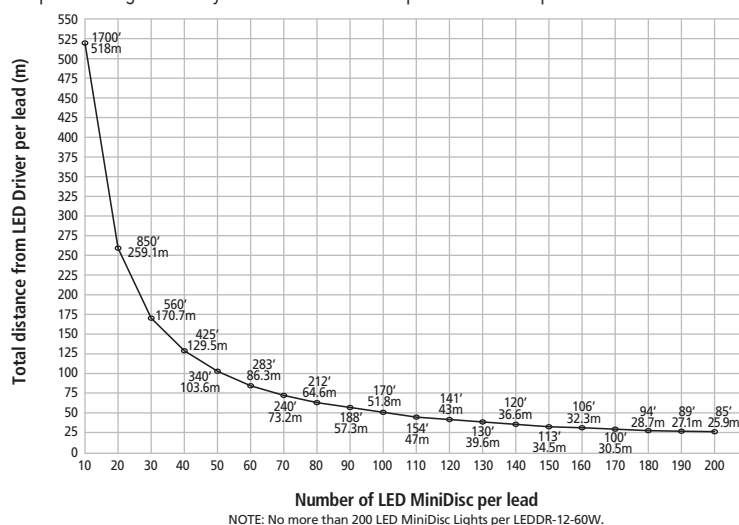




## WARNING: LACK OF DRAINAGE WILL VOID THE WARRANTY

To maintain the warranty, a proper drainage system **MUST** be installed (drainage material or drainage pipe), when the product is installed in soil or concrete.



### Test drainage prior to installation.

A quantity of water equal to the volume of the mounting hole should drain in 15 minutes or less.





# LED MiniDisc Light (Scoop)

LED MiniDisc Scoop is designed to direct light where you want it. Ideal for stair lighting when placed on risers to avoid glare. Great for theatre aisle ways.

## FEATURES

- Now dimmable on the primary power supply side with our new dimmable LED Drivers!
- Long life - 50,000 hours
- Low power consumption of 0.24 watts per fixture
- Safe 12 volt, Class 2 power supply (not included)
- Up to 100 fixtures per power supply
- cETLus listed for in-wall, IC ceiling, in-floor, outdoor wet, and outdoor burial applications
- Fits in any 1" diameter hole, 3 1/2" long
- 2 year limited warranty, 3 years on stainless steel

## APPLICATIONS

- Steps
- Aisles
- Paths
- Driveways
- Direction lighting
- Information lighting
- Decorative lighting
- Merchandising
- Landscape accents

NOTE: It is not recommended to install Mini Disc Lights Scoop in harsh environments (such as limestone, salted areas, coastal environments, etc.) to avoid the risk of corrosion to the body of the fixture.

## PRODUCT CODES

### LEDMD - S - XX - YY

LED MiniDisc  
Light - Scoop

Color OF LED  
**CW** - 5400K  
**WW** - 2900K  
**AM** - Amber  
**BL** - Blue  
**GR** - Green  
**RD** - Red

FINISH  
**AL** - Aluminum  
**WH** - White  
**BZ** - Bronze  
**BK** - Black



## SPECIFICATIONS

Electrical	12V DC, 20mA, 0.24W
Wiring Options	Each LED Driver can power up to 200 LED MiniDisc Lights by parallel wiring ("daisy chain") between fixtures. NOTE: Use LW-18G-CL2 for all in-wall applications. Use LW-18G-BUR for all burial applications.
LED Life	50,000 hours
LED Colors	CW 5400K, WW 2900K, Blue, Green, Amber, Red
Construction	Both cover and barrel are die cast aluminum or stainless steel for corrosion protection, strength, weight and consistency of finish.
Cover Finish	Aluminum, White, Bronze, Black
Barrel Finish	Aluminum, White, Bronze, Black
Lens	Frosted Tempered Glass
Approvals	cETLus listed and labeled for wet, IC, ceiling, wall and direct burial applications.

## REPLACEMENT LED MODULES

### LCL-LEDMOD-CW

LED Mini Disc Light module, 12V, cool white LED 5400K

### LCL-LEDMOD-WW

LED Mini Disc Light module, 12V, warm white LED 2900K

## INSTALLATION WIRE

### LW-18G-BUR



For outdoor burial connections

### LW-18G-CL2

For indoor through wall connections

NOTE: One of the above wires MUST be used in order to maintain product warranty.



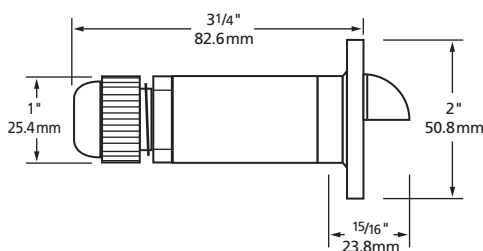

## ACCESSORIES




### LEDMD-CF

LED MiniDisc Light concrete form for concrete pour applications. Fits over most 1/2" (12.7mm) conduit junction boxes.

## 100% LED Light Output Chart

With every foot of lead wire and every light fixture, there is voltage loss. With too much voltage loss all light fixtures will not develop 100% of their potential output. Below is a chart of acceptable voltage loss which will maintain 100% of the potential light output of the LED MiniDisc Light. Simply plot the number of LED MiniDiscs you wish to place on one lead on the horizontal axis, with the total distance from the LED Driver to the last LED MiniDisc on the vertical axis. If the resulting plot is at or below the line shown, you will have acceptable voltage loss and your LED MiniDisc will output 100% of their potential.

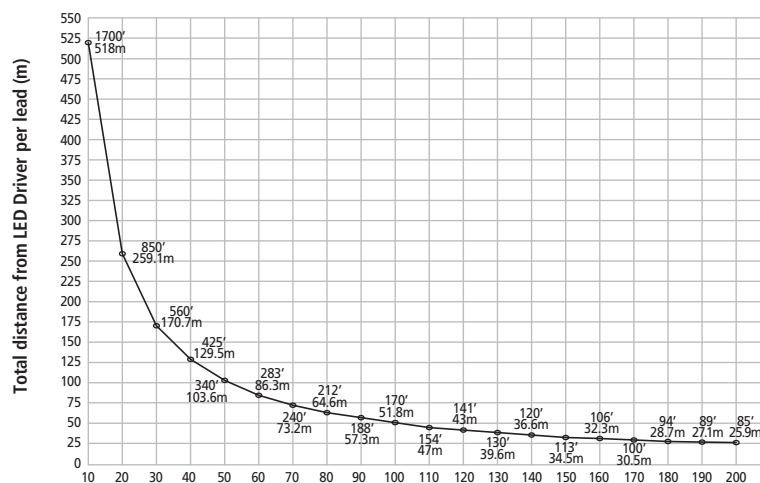

Number of LED MiniDisc per lead

NOTE: No more than 200 LED MiniDisc Lights per LEDDR-12-60W.

## INDOOR/OUTDOOR DIMMABLE DRIVERS

### TRE12L20DC

20 Watts

Max. recommended load 18 W or 75 LED MiniDisc Lights

Min. recommended load 8 W or 34 LED MiniDisc Lights

6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

### TRE12L60DC

60 Watts

Max. recommended load 54 W or 200 LED MiniDisc Lights

Min. recommended load 8 W or 34 LED MiniDisc Lights

6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

NOTE: For outdoor installations, please add E-KO-SR strain relief.

## NON DIMMABLE DRIVERS

### LEDDR-12-60W

Indoor/Outdoor driver

60W hardwire

Input: 100 - 240V AC

Output: 12V DC

Max. 200 MiniDisc Lights

9 11/16" x 2 9/16" x 2 1/16" (246 x 65 x 52mm)

# LED Switch Star

Suitable for indoor or outdoor use, LED Switch Star is the perfect fixture for security or egress lighting. There are no remote drivers to deal with – LED Switch Star connects directly to 120V and is extremely easy to install. Decorative covers available include louver, scoop or prism in both horizontal as well as vertical mount options.



## FEATURES

- Low power consumption (1.4 watts)
- Easy installation – mounts to standard 2" x 4" electrical box
- Indoor or outdoor applications
- 3 colors to choose from
- Dimmable
- 40,000 hour life
- cETLus listed
- 3 year warranty

## APPLICATIONS

- Hallways
- Stairways
- Night Light
- Decks and Patios
- Parking garages
- Elevators
- Exterior commercial or residential

## SPECIFICATIONS

Electrical	120V AC, 1.4W, .012A
LED Type	AC LED
LED Life	40,000 hours to 70% Lumen output
Lumen Output	80
Lumen Efficacy (LPW)	57
Color Temperature	2700K or Amber
CRI	≥ 80
Beam Pattern	120°
Operating Temperature	-30°C – +60°C
Construction	Polycarbonate (5VA flame rated, F1 UV rated) & Glass
Approvals	cETLus listed

## PRODUCT CODES

### LED - SW - X - Y

LED Switch Star	COVER	COLOR
	<b>S</b> - Scoop	<b>WH</b> - White
	<b>P</b> - Prism	<b>LA</b> - Light Almond
	<b>L</b> - Louver	<b>BWG</b> - Brown Wood Grain

### REPLACEMENT COVER *(Sold Separately)*


### LED - SW - X - Y - COV

LED Switch Star	COVER	Color	REPLACEMENT COVER
	<b>S</b> - Scoop	<b>WH</b> - White	
	<b>P</b> - Prism	<b>LA</b> - Light Almond	
	<b>L</b> - Louver	<b>BWG</b> - Brown Wood Grain	


Note: Add (-AM) on the part number for Amber LED fixture  
Scoop and Louver covers are supplied in both horizontal and vertical.

## Cover Styles


Horizontal  
Louver




Horizontal/Vertical  
Prism




Horizontal  
Scoop



Vertical  
Scoop

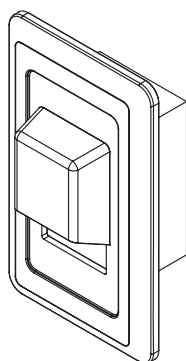


Vertical  
Louver




## Cover Dimensions


Prism




Vertical  
Scoop




Vertical  
Louver





Horizontal  
Louver





Horizontal  
Scoop



Prism & Louver Side and Top



Scoop Side and Top



# LED Step Star

## GEN II

LED Step Star provides a safe, attractive and affordable way to light stairs, hallways and aisles. LED Step Star is a highly effective and energy efficient recessed fixture suitable for indoor and outdoor use. LED Step Stars are made of cast aluminum for strength and corrosion protection and are suitable for concrete pour installations.



**Anywhere that requires security or safety lighting in an aesthetically pleasing manner!**

### FEATURES

- 40,000-hour LED life
- Ultra low 5.2 watt energy usage per fixture
- CRI 80+
- Lumen output: 468LM
- 120VAC power input
- Up to 150 LED Step Star lights per 120VAC tap
- Die cast aluminum can and cover
- cETLus listed for indoor and outdoor applications including wet, IC, concrete pour, ceiling and shower locations
- Dimmable with most forward phase TRIAC dimming systems
- 3 year limited warranty

### APPLICATIONS

- Interior stairs
- Exterior stairs
- Aisles
- Hallways
- Paths
- Emergency lighting
- Theaters
- Public areas
- Patios
- Decks

### SPECIFICATIONS

Electrical	120V AC, 5.2W
Wiring Options	120V AC hardwire - can be daisy chained up to 150 fixtures per 15A circuit
LED Life	40,000 hours
Lumen Output	468LM
Color Temperature	3000K +/-200
CRI	≥ 80
LED Colors	White
Cover Finish	White, Black, Bronze, and Aluminum
Can Finish	Powder Coated White
Lens	Frosted Tempered Glass
Approvals	cETLus listed for wall, ceiling, wet and IC locations

### PRODUCT CODES

**LST - II - X - WH - YY**

**LED Step Star**  
Gen II

**COVER**  
**P** - Prism  
**S** - Scoop  
**L** - Louver

**COLOR OF LED**  
3000K



**COVER FINISH**  
**WH** - White  
**BK** - Black  
**BZ** - Bronze  
**AL** - Aluminum

**REPLACEMENT KIT**  
**LST-II-KIT**

**CONCRETE CAP**  
**SL-CC**

Concrete cap for concrete pour installations




NOTE: For outdoor installations, a 1/2" liquid tight strain relief is recommended

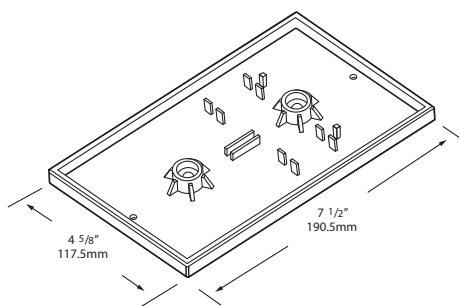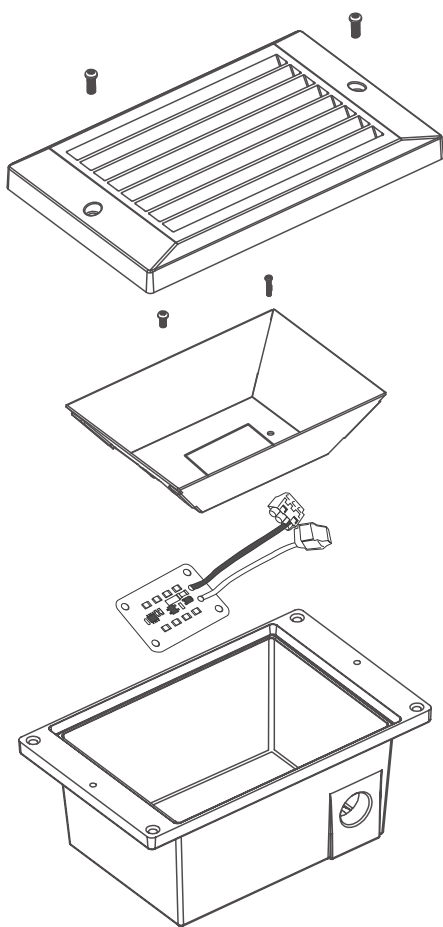

### Concrete Cap for concrete pour installations

Product Code: **SL-CC**

**IMPORTANT:** It is recommended that you use National Specialty Lighting's Concrete Cap for concrete pour installations. These caps assist in providing a proper reveal for flush mount of fixture cover after concrete is dry.

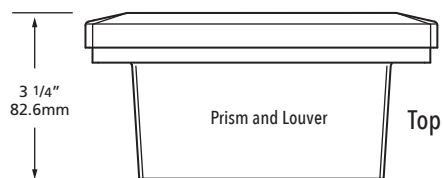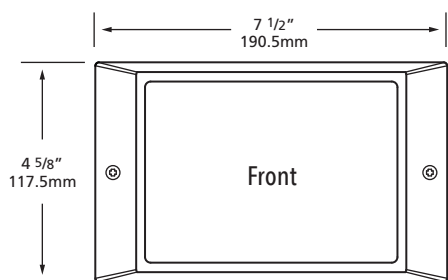

# LED Brick Star

## GEN II

LED Brick Star provides a safe, attractive and affordable way to light stairs, aisles, paths and entrance ways. LED Brick Star delivers excellent performance at an affordable price. The LED Brick Star has been uniquely designed to the specific size of a standard brick. This provides the perfect solution for those applications where a more linear fixture is required.



**Anywhere that requires security or safety lighting in an aesthetically pleasing manner!**

### FEATURES

- 40,000-hour LED life
- Ultra low 5.2 watt energy usage per fixture
- CRI 80+
- Lumen output: 468LM
- 120VAC power input
- Up to 150 LED Brick Star lights per 120VAC tap
- Die cast aluminum can and cover
- Available in fluorocarbon can with stainless steel louver cover
- Fits into any standard brick, or in any void sized 7 3/4" x 2 1/2" x 3 1/4" (196.6mm x 63.5mm x 82.6mm)
- cETLus listed for indoor and outdoor applications including wet, IC, concrete pour, ceiling and shower locations
- Dimmable with most forward phase TRIAC dimming systems
- 3 year limited warranty

### APPLICATIONS

- Brick walls
- Exterior steps
- Interior steps
- Aisles
- Halls
- Paths
- Patio lighting
- Entry lighting
- Ceilings
- Showers

**NOTE:** When installing LED Brick Star in harsh environments (such as limestone, salted areas, coastal environments, etc.) please use the stainless steel version to avoid the risk of corrosion to the body of the fixture.

### SPECIFICATIONS

Electrical	120V AC, 5.2W
Wiring Options	120V AC hardwire - can be daisy chained up to 150 fixtures per 15A circuit
LED Life	40,000 hours
Lumen Output	468LM
Color Temperature	3000K +/-200
CRI	80+
LED Colors	White
Can Finish	Powder Coated White or Fluorocarbon Lacquer (Stainless Steel)
Cover Finish	White, Black, Bronze, Aluminum or Stainless Steel finish only available in Louver cover
Lens	Frosted Tempered Glass
Approvals	cETLus listed for wall, ceiling, wet and IC locations

### PRODUCT CODES

**LBR - II - X - WH - YY**

**LED Brick Star**  
**Gen II**

**COVER**  
**P** - Prism  
**S** - Scoop  
**L** - Louver

**COLOR OF LED**  
3000K

**COVER FINISH**  
**WH** - White  
**BK** - Black  
**BZ** - Bronze  
**AL** - Aluminum  
**SS** - Stainless Steel



**REPLACEMENT KIT**  
**LBR-II-KIT**

**CONCRETE CAP**  
**BL-CC**

Concrete cap for concrete pour installations

**NOTE:** For outdoor installations, a 1/2" liquid tight strain relief is recommended




**NOTE:** Stainless Steel finish available in Louver cover only.

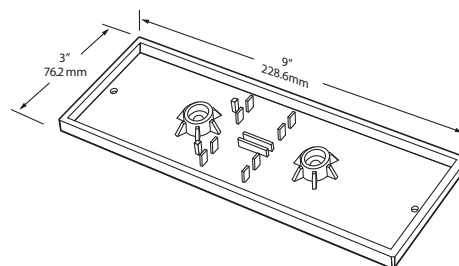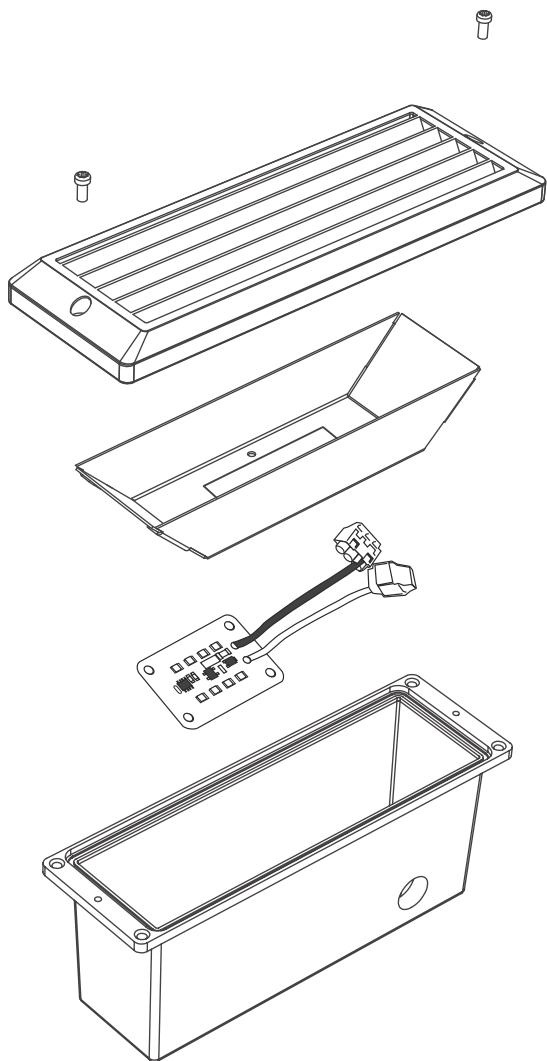

### Concrete Cap for concrete pour installations

Product Code: **BL-CC**

**IMPORTANT:** It is recommended that you use National Specialty Lighting's Concrete Cap for concrete pour installations. These caps assist in providing a proper reveal for flush mount of fixture cover after concrete is dry.

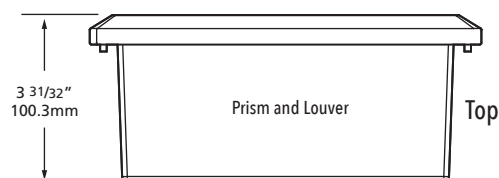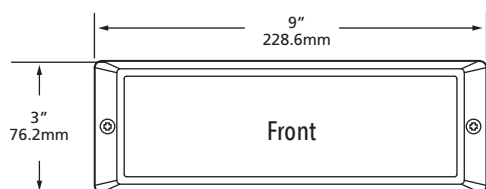

# LED Outdoor Sconce

A contemporary style wall sconce suitable for interior and exterior use. Available in three finishes and three interchangeable covers to suit a variety of applications, while keeping balance between budget and aesthetics.

## FEATURES

- Housing - Rugged aluminum construction
- 120V - 277V AC input voltage
- Lumen output 1300LM
- CRI 80+
- LED life: 50,000 hours
- Powder coated finish
- 120° beam angle
- Internal driver
- ADA compliant
- Available in three finishes: Brown, Black and Silver
- Three interchangeable covers: Wave, Wing and Scoop
- cULus listed for wet locations
- 5 year limited warranty

## APPLICATIONS

- Exterior residential
- Exterior commercial
- Entrance ways
- Hallway lighting
- Outside elevators
- Patio Lights
- Deck Lights
- Hotel hallways
- Restaurants
- Stairways
- Lobbies

## PRODUCT CODES

### TLWMV15XWMZZ

**LED**  
Outdoor  
Sconce

**Color OF LED**  
**3** - 3000K  
**4** - 4000K


**FINISH**  
**BR** - Brown  
**BK** - Black  
**SV** - Silver



## SPECIFICATIONS

Input Voltage	120V - 277V AC
LED Color	3000K, 4000K
Power Consumption (W)	15
LED Type	LUMILED 3030
Lumen Output	1300LM
Ambient Temperature	-20C - 40C
CRI	80+
Life Span (hours)	50,000
Appearance Size	4 3/8" W x 8" D (111mm W x 203mm D)
Approvals	cULus listed for wet locations

3 cover options (sold separately)

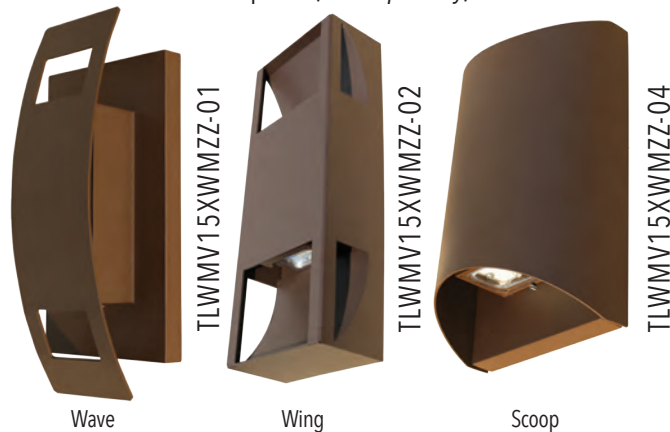


Wave

Wing


Scoop




LED Outdoor Sconce

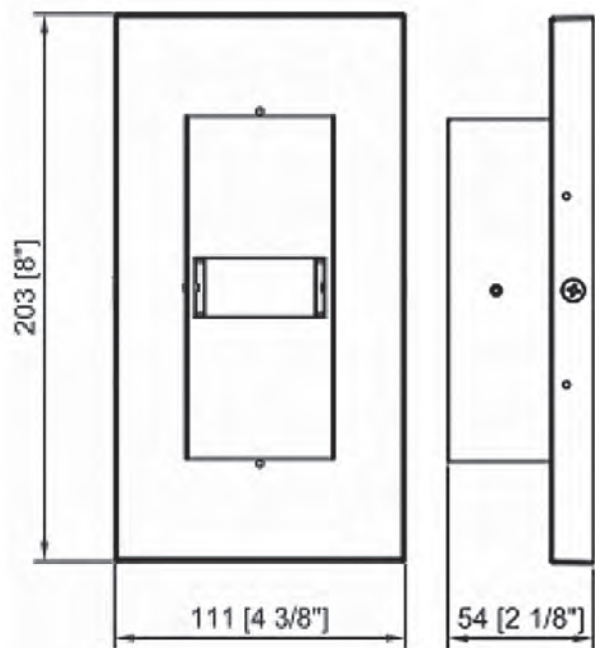


Covers (sold separately)

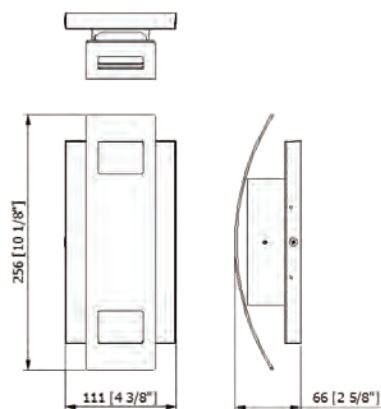

WAVE TLWMV15XWMZZ-01

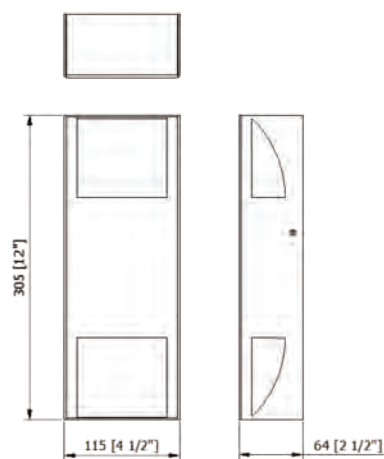

WING TLWMV15XWMZZ-02

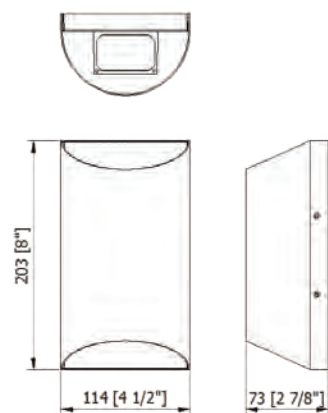

SCOOP TLWMV15XWMZZ-04

# CCT Adjust Mini Flood Light

CCT Adjust Mini Flood Lights provide exceptional illumination for architectural, signage and landscape applications. CCT adjustable with a push of a button 3000K/4000K/5000K.



Change the color temperature, with a push of a button

## FEATURES

- Compact size
- CCT adjustable 3000K/4000K/5000K
- High lumen output
- Easy to install and operate
- Very wide flood 150° x 120° (7H6V)
- Long life 50,000 hours
- Instant start, no flickering
- Available in 15W, 30W or 50W
- cULus listed for wet locations
- 5 year limited warranty

## APPLICATIONS

- Architectural lighting
- Signage
- Landscape lighting
- Exterior commercial


## PRODUCT CODES

- FL - 15 - CT
- FL - 30 - CT
- FL - 50 - CT


## SPECIFICATIONS

Input Voltage	100 -277VAC
Adjustable Color Temperature	Warm White (3000K) Neutral White (4000K) Cool White (5000K)
Power Consumption (W)	15W / 30W / 50W
Lumen Output	15W: 3000K=1725-1950LM / 4000K=2025-2250LM / 5000K=1875-2100LM 30W: 3000K=3450-3900LM / 4000K=4050-4500LM / 5000K=3750-4200LM 50W: 3000K=5750-6500LM / 4000K=6750-7500LM / 5000K=6250-7000LM
LED Type	SMD3030 (1W)
Beam Angle	150° x 120° (7H6V)
Operating Temperature	-20°C to 50°C
Color Rendering Index	>80
Approvals	cULus listed for wet locations


15W and 30W

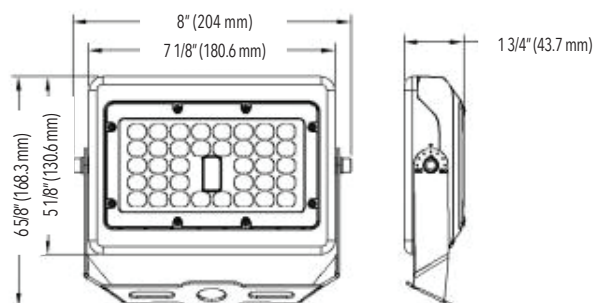

50W

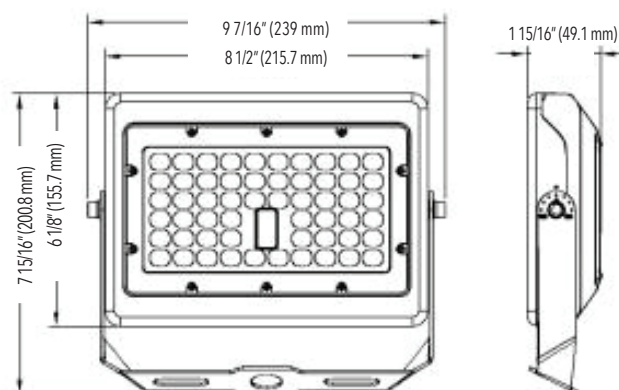


## MOUNTING ACCESSORIES




**FL-TR**  
Trunnion mount bracket  
To use for wall and ground mount



**FL-Y-15/30, FL-Y-50**  
Yoke mount bracket  
To use for wall and ground mount

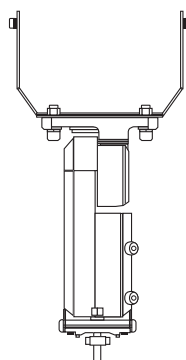

**FL-ADM-15/30, FL-ADM-50**  
Universal mount bracket  
For use on poles



**FL-SH-15/30**  
**FL-SH-50**  
Glare shield



**FL-WG-15/30**  
**FL-WG-50**  
Wire guard


# Switchex®

## LED DRIVER + DIMMER IN ONE

SWITCHEX® is a dimmer with an integrated driver that converts 120VAC to either 12VDC or 24VDC. This means SWITCHEX® is all you need between your line voltage and low voltage LED lighting. Best of all, it fits in a standard electrical box.

SWITCHEX® solves two of the most common LED lighting challenges:

- Poor dimming performance that often results when a dimmer and LED driver are made by different manufacturers
- Finding a place to fit the LED driver

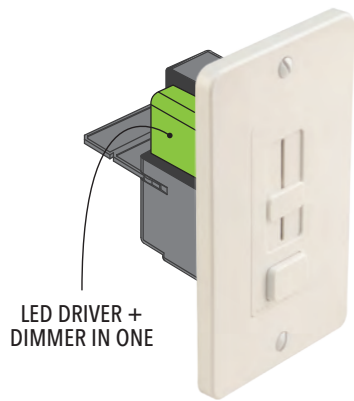

3 switch plate faces included - Glossy Dark Brown, Glossy Light Almond, Glossy White. Glossy Black option sold separately. Electrical box not included.



### FEATURES

- Eliminates driver/switch compatibility issues
- Easy in-line installation
- Integrated LED driver
- Excellent dimming performance
- Fits in a standard electrical box
- Preset dimmer with on/off switch
- 100W, 24V DC capacity
- 60W, 12V DC capacity (separate model)
- 2 year limited warranty

### SPECIFICATIONS

Electrical	SX-12V-DD-60W = 120V AC input, 12V DC output SX-24V-DD-100W = 120V AC input, 24V DC output
Environment	Indoor
Connection Type	Hardwire
Mounting	Single-Gang Box
Approvals	UL Listed 2108

### PRODUCT CODES

#### SX - XXV - DD - YYW

Switchex	OUTPUT VOLTAGE	WATTAGE
	12 - 12VDC	60 - 60W
	24 - 24VDC	100 - 100W

#### TRIM PLATE (Sold Separately)



#### SX - TP - XX

Switchex Trim Plate	FINISH
	BR - Glossy Dark Brown
	LA - Glossy Light Almond
	WH - Glossy White
	BL - Glossy Black



## The Driver Is Inside

SWITCHEX® is all you need between your line voltage and low voltage LED lighting. The integrated driver converts 120VAC to either 12VDC or 24VDC and it fits in a standard electrical box.

No Remote  
Driver Required

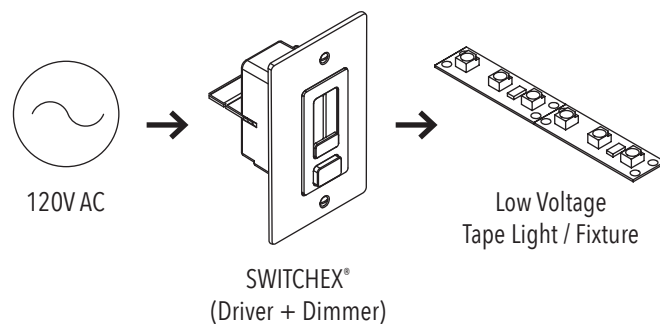

## SWITCHEX® Driver and Dimmer Switch Diagram

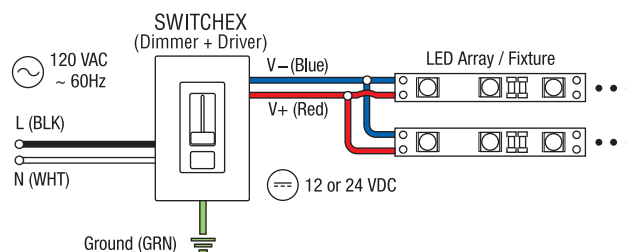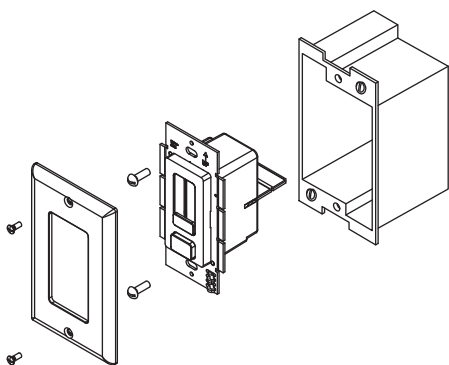


# LED Drivers Selector Chart

## NON DIMMABLE DRIVERS



## DIMMABLE DRIVERS



Indoor, Non-Dimmable	LED Neon Flex	LED Mini Star II	LED Tape Light*	LED Globe Light
LMS-24-18W 24V, 18W, plug in	-	Max. 4 LEDMS II	-	-
LMS-24-60W 24V, 60W plug in	-	Max. 16 LEDMS II	-	-
LTH-24-65W 24V, 60W, plug in	-	-	-	-

Indoor/Outdoor Non-Dimmable				
LEDDR-12-60W 12V, 60W, hardwire, outdoor, Max. 60W	-	-	-	-
LEDDR-24-120W 24V, 120W, hardwire, outdoor, Max. 120W	Max 40' (12.1m) per single tap, Max 48' (14.6m) combined 2 secondary taps	Max. 32 LEDMS II 16 per single secondary tap	LED Tape Light: Max. recommended load 90W or 20' (6.1m) per single tap, 120W or 27' (8.23m) combined two secondary taps. CCT series: 16' (4.88m) per single tap, 20' (6.1m) combined two secondary taps.	Max. 180 Globes per single tap, max. 120 combined two secondary taps.

Indoor/Outdoor Dimmable				
TRE12L20DC†† 12V, 20W, hardwire, outdoor, dimmable, Max. 18W, Min. 10W	-	-	-	-
TRE12L60DC†† 12V, 60W, hardwire, outdoor, dimmable, Max. 54W, Min. 30W	-	-	-	-
TRE24L40DC†† 24V, 40W, hardwire, outdoor, dimmable, Max. 36W, Min. 20W	Max 14.5' (4.4m) Min 8 watts, 3.3' (1m) LED Neon Flex	Max. 10, Min. load 10W or 3 LED Mini Star II	LED Tape Light: Max. recommended load 36W or 8' (2.44m), Min. 8W or 2' (.61m).	Max. 80 Globes
TRE24L96DC†† 24V, 100W, hardwire, outdoor, dimmable, Max. 90W, Min. 50W	Max 40' (12.1m) Min 8 watts, 3.3' (1m) LED Neon Flex	Max. 25, Min. load 10W or 3 LED Mini Star II	LED Tape Light: Max. recommended load 90W or 20' (6.1m), Min. 8W or 2' (.61m).	Max. 180 Globes

† Note: Above maximum and minimum lengths are for Standard Tape. You may double these when using LP, Low Power Tape.

†† TRE drivers require E-KO-SR for outdoor applications

\* Please refer to catalog for # of LEDs per fixture.

LED Wedge Light	LED Hard Strip	LED Thin Star	LED Britestrip	LED eSTRIP	LED Disc Light	LED MiniDisc Light
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	Max. total 60 Thin Star LEDs*	-	-	-	-

Max. 200 Globes	-	-	-	-	Max. 18 LEDD	Max. 200 LEDMD
-	-	-	Festoon .52W LED modules: Max. 110 per single secondary tap, max. 185 total	Max. 90" (27.43m) per single secondary tap, max. 120' (36.58m) combined two secondary taps. RGB eStrip & HP eStrip: 40' (12.1m) per single secondary tap, 50' (15.24m) combined secondary taps	-	-

Max. 80 Globes	-	-	-	-	Max. recommended load 18W or 6 LEDD Min. recommended load 8W or 3 LED Disc Lights	Max. 75 LEDMD Min. recommended load 8W or 34 LED MiniDisc Lights
Max. 200 Globes	-	-	-	-	Max. recommended load 54W or 18 LEDD Min. recommended load 8W or 3 LED Disc Lights	Max. 200 LEDMD Min. recommended load 8W or 34 LED MiniDisc Lights
-	Max. recommended load 36W, min. 8W LED Hard Strip	Max. total 60 Thin Star LEDs* Min. recommended load 8W or 18 Thin Star LEDs	Max. 76 LED lamps Min. 16 LED lamps	LED eStrip: Max. 37.5' (11.43m), Min. 8W, 9' LED eStrip (2.44m). High Power: Max. 18' (5.49m), Min. 4' (1.2m)	-	-
-	Max. recommended load 90W, min. 8W LED Hard Strip	-	Max. 180 LED lamps Min. 16 LED lamps	LED eSTRIP: Max. 90' (27.4m), Min. 8W, 9' LED eStrip (2.44m). High Power: Max. 40' (12.19m), Min. 4' (1.2m)	-	-

† Note: Above maximum and minimum lengths are for Standard Tape. You may double these when using LP, Low Power Tape.

†† TRE drivers require E-KO-SR for outdoor applications

\* Please refer to catalog for # of LEDs per fixture.

# LED Controllers List

DMX DECODER	Description
LV-DMX-IP-RGB-3CH	3CH DMX Decoder 12/24V DC output, <4A MAX, 12<144W, 24v<288W
LV-DMX-IP-RGB-4CH	4CH DMX Decoder 12/24V DC output, <4A MAX, 12<192W, 24v<384W
DMX CABLE	Description
LVL-DMX-3PIN-1FT	1ft Long power cable with XLR waterproof connector
LVL-DMX-3PIN-5FT	5ft Long power cable with XLR waterproof connector
LVL-DMX-3PIN-10FT	10ft Long power cable with XLR waterproof connector
LVL-DMX-3PIN-25ft	25ft Long power cable with XLR waterproof connector
LVL-DMX-3PIN-50FT	50ft Long power cable with XLR waterproof connector
LVL-DMX-3PIN-60FT	60ft Long power cable with XLR waterproof connector
LVL-DMX-3PIN-100FT	100ft Long power cable with XLR waterproof connector
DMX CONTROLLERS	Description
SLESA-U9	Entry level, USB 256 channels
STICK-GA2	Mid range, touch control pad 512 channels
STICK-GU2	DMX, touch control pad, 128 channels
STICK-DE3	Professional, touch control Pad 1024 channels
DMX ACCESSORIES	Description
LV-DMX-XLR3-ST	XLR3 Signal terminator
LV-DMX-3PIN	Power cable XLR waterproof connector
SENSOR	Description
LV-SPIR-1CH-LV	PIR Motion sensor, 1 channel, 12/24V DC
CONTROLLERS & AMPLIFIERS	Description
LT-09S-RF	6 Key RGB "touch" controller 12/24V DC, 432W
LT-390A	Signal amplifier for RGB 12/24V DC, 3 channel, indoor, 288W
LT-031-RF	6 Key CCT Adjustable "touch" controller 12/24V DC, 288W
LT-290A	Signal amplifier for CCT color adjust Tape Light 12/24V DC, 288W
LT-032-RF	6 Key Dimming "touch" controller 12/24V DC, 432W
LT-190A	Dimming signal amplifier
LV-ZJFFS-3CH-6INW	WD Signal amplifier for RGB 12/24V DC, 3 channel, outdoor, 288W
LV-RF103	Wireless RF mini RGB controller 24V, 96W
LV-RF103-EXHS	6" Tape Light extension connector for LV-RF103 controller
LN-WIFI-CTRL	3 in 1 LED Strip Controller (WiFi+2.4G)
LT-10S-WH	Wall mount RGB controller, 288W
LT-11S-RF	RGBW controller, 576W
LN-WIFI-RM	4-Zone RGB+CCT Remote





LN-WIFI-CTRL



LN-WIFI-RM



STICK-DE3



STICK-J GA2



SLESA-U9



STICK-GU2



LV-RF103



LV-SPIR-1CH-LV

LT-390A  
NOT SHOWN: LT-290A

LV-ZJFFS-3CH-6INW

LV-DMX-IP-RGB-3CH  
LV-DMX-IP-RGB-4CH

LT-031-RF



LT-032-RF



LT-09S-RF

LVL-DMX-3PIN



LVL-DMX-3PIN-1FT  
LVL-DMX-3PIN-5FT  
LVL-DMX-3PIN-10FT  
LVL-DMX-3PIN-25FT  
LVL-DMX-3PIN-50FT  
LVL-DMX-3PIN-60FT  
LVL-DMX-3PIN-100FT



LV-DMX-XLR-ST



LV-HS-CN-3DC



LT-10S-WH



LT-11S-RF

# Transformers - Magnetic

ETL listed indoor and outdoor

## TR-12-150

10" x 3.1" x 3"  
1 circuit at 150 watts for 12V AC



## TR-12-240

10" x 4.25" x 3.6"  
1 circuit at 240 watts for 12V AC



## TR-12-300 or TR-24-300

10" x 4.25" x 3.6"  
2 circuits at 150 watts each for 12V AC  
1 circuit at 300 watts for 24V AC



## TR-24-480

11.1" x 4.75" x 4.25"  
1 circuit at 480 watts for 24V AC



## TR-24-600

11.1" x 4.75" x 4.25"  
2 circuits at 300 watts each for 24V AC



## TR-24-960

12.5" x 7.0" x 4.75"  
2 circuits at 480 watts each for 24V AC



### NOTE:

- All transformer and LED driver dimensions are Length x Width x Height
- All transformer dimensions are of enclosure including mounting flanges and included strain relief
- All transformers should be totally enclosed, and must ventilate
- All LED drivers, dimmers and transformers carry a two year warranty

# Transformers - Electronic

UL listed as a component ("RU" Marking).

TER-12-60/W (white)  
TER-12-60/B (black)


3.5" x 1.5" x 1"  
1 circuit at 60 watts, class 2,  
for 11.6V AC



TE-12-75

2.08" x 1.30" x 0.79"  
1 circuit at 75 watts for 11.5V AC

NOTE: Must use a minimum of  
20 watts when using dimmers.

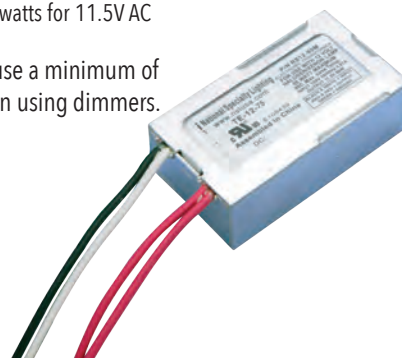

TE-12-105

3.0" x 1.25" x 0.75"  
1 circuit at 105 watts for 11.6V AC



TE-12-150

4.0" x 1.6" x 1"  
1 circuit at 150 watts for 11.6V AC



# Transformers - Electronic

ETL listed as a stand alone power supply ("ETL" Marking).

TECLT-12-60

6.5" x 1.5" x 1.5"  
Class 2, 1 circuit at 60 watts,  
for 11.7V AC



TECLT-12-150

7.1" x 1.75" x 1.75"  
1 circuit at 150 watts,  
for 11.7V AC



Each transformer is enclosed in a painted steel enclosure with 1/2" knockouts for the incoming 120V AC and the 11.7V AC output.

# WARRANTY

NATIONAL SPECIALTY LIGHTING (NSL) warrants this lighting system to be free from defects in material and/or workmanship, under normal use and service, for a period of TWO to SIX YEARS (see specifics on product specifications) from the date of original purchase.

In the event of a defect in material or workmanship during the warranty period, NSL will repair or replace (at its option) your Lighting System under the conditions of warranty. NSL will do this at its expense for the cost of materials but not for shipping. THIS REMEDY IS THE SOLE AND EXCLUSIVE REMEDY FOR ANY AND ALL CLAIMS RELATING TO ANY BREACH OF WARRANTY BY NSL.

## LIMITATIONS, EXCLUSIONS AND OTHER RIGHTS

- A. Except as provided herein, NSL makes no other warranties express or implied, including but not limited to the implied warranties of merchantability or fitness for a particular purpose, and all such warranties are expressly disclaimed.
- B. In no event shall NSL be liable for indirect, incidental or consequential damages, even if NSL has been advised of the possibility of such damage. This disclaimer applies during and after warranty period.
- C. NSL is not responsible for malfunctions in and/or damage to Lighting Systems where a sale is specifically made without warranty. In such an event the disclaimers of warrant and liability, set forth above, shall continue to apply.
- D. This warranty covers normal consumer use and does not cover damage which occurs during shipment or failure which results from alteration, accident, theft, misuse, abuse, abnormal use, negligent installation, improper maintenance or where adequate care has not been taken to prevent ice or snow damage to the lighting system.
- E. Specifically, when installing mini disc lights in harsh environments such as limestone, salted areas, coastal environments etc. Please use the stainless steel version to avoid the risk of corrosion to body of fixture and voiding warranty.

If you discover a defect or malfunction during the period to which this warranty applies, call or email NSL for information or to receive warranty service.

**Note: You must contact our office for a RETURN GOODS AUTHORIZATION number before returning product. After inspection it will be determined whether a credit is due.**



**NATIONAL SPECIALTY LIGHTING**  
YOUR TRUSTED LIGHTING PARTNER

## DID YOU KNOW?



Once a customer has reached a cumulative purchase level of \$3,000.00 they are entitled to free normal UPS ground freight charges within the 48 contiguous states on every order\* (*residential deliveries excluded*) \*Minimum \$100.00 order to qualify for free freight. With our prompt delivery pledge National Specialty Lighting offers same day shipping on all non-custom orders placed before 12:00pm Eastern Time.



365 day return policy allow customers to take advantage of new National Specialty Lighting products, define new markets and help to build their business. A National Specialty Lighting Stocking Distributor may return any current stock item within 12 months of purchase date for a restocking fee of 50%. Restocking fee will be waived if distributor places a stock order of equal value or greater than the value of the items being returned. No special catches or exceptions. Items are sent back to National Specialty Lighting prepaid in the original packaging, and merchandise is in resalable condition.



National Specialty Lighting does not have a minimum order requirement, and never will. Some companies require you to purchase large quantities of product or meet a specific spending target. Companies use the excuse that it's the cost to process the order. National Specialty Lighting orders are filled regardless of how large or small it is! If you want to purchase just one item to finish a project no problem, your order is always treated as a priority.



Tracking Your Order has never been easier, simply provide us with an email address and you will automatically be notified when your order has been shipped. All orders are shipped though UPS. Send your email address to **[nslsales@nslusa.com](mailto:nslsales@nslusa.com)**





YOUR TRUSTED LIGHTING PARTNER

Tel: 303.926.1100 • Toll-free: 1.800.527.2923 • [nslsales@nslusa.com](mailto:nslsales@nslusa.com) • [nslusa.com](http://nslusa.com)  
2299 Kenmore Avenue, Tonawanda, New York, USA 14207