
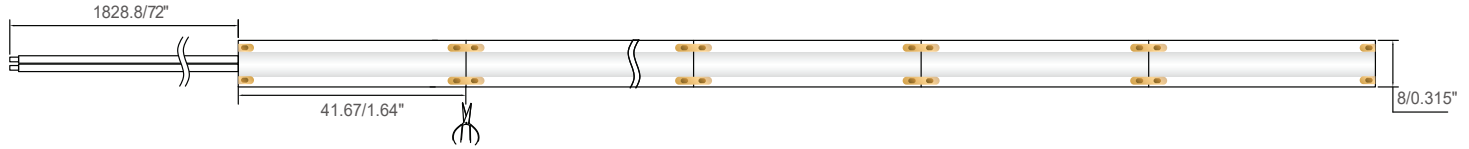


## Tunable CCT Indoor, High Power & Low Power



### ACCESSORIES

| 6' Powerfeed  | 6" Jumper    | Splice     | L-shaped Connector | T-shaped Connector |
|---------------|--------------|------------|--------------------|--------------------|
| SL-ID-W2BC-72 | SL-ID-BWBC-6 | SL-ID-B2BC | SL-ID-LC           | SL-ID-TC           |

### CONTROLLERS

|  |  |
|--|--|
| <b>2 Wire CCT Controller</b>                   | CNTRL-2W-CCT   |
| <b>Rotating CCT Scene Remote White / Black</b> | <ul style="list-style-type: none"> <li>• CNTRL-4Z-CCT-RWP-WH</li> <li>• CNTRL-4Z-CCT-RWP-BK</li> </ul> |
| <b>4 Zone CCT Remote</b>                       | CNTRL-4Z-CCT-RM  |

### DRIVERS

| Non-Dimmable                  |  |
|-------------------------------|--|
| <b>Plug-in Driver 48W/96W</b> | <ul style="list-style-type: none"> <li>• PGID2448</li> <li>• PGID2496</li> </ul> |
| <b>Indoor/Outdoor driver</b>  | LEDDR-24-120W  |

### Specifications

|                   |  |                          |                 |
|-------------------|--|--------------------------|-----------------|
| Input Voltage     | 24V DC   | Binning                  | 1BIN            |
| Power Consumption | <ul style="list-style-type: none"> <li>• 2.74 W/ft (9W/m)</li> <li>• 1.22 W/ft (4W/m)</li> </ul>     | SDCM                     | <3              |
| Efficacy          | 110 Lm/w   | Lifespan                 | 50,000 Hours    |
| Color Temperature | 2700K-6500K  | Dimensions (Inches)      | .31" W          |
| Lumen Output      | <ul style="list-style-type: none"> <li>• 301Lm/ft (990Lm/m)</li> <li>• 134Lm/ft (440Lm/m)</li> </ul> | Dimensions (Millimeters) | 8mm W           |
| Beam Angle        | 140°   | Max Length               | 20Ft (6M)       |
| Dimmable          | Yes (PWM / 0-10V / 1-10V)  | Custom Cuttable          | 1.64" (41.67mm) |
| Chip Type         | 2219   | IP Rating                | IP40            |
| CRI               | 90   | Approved Location        | Indoor          |
| # per meter       | 384  | Warranty                 | 5 Years         |

### Ordering Code(s)

- SL-ID-CCT-HP-XX-A8 [XX: Length in feet; A: 2219 LED; 8: 8mm PCB]  
Available in 20 or 100 feet; For 20 feet: SL-ID-CCT-HP-20-A8; For 100 feet: SL-ID-CCT-HP-100-A8
- SL-ID-CCT-LP-XX-A8 [XX: Length in feet; A: 2219 LED; 8: 8mm PCB]  
Available in 20 or 100 feet; For 20 feet: SL-ID-CCT-LP-20-A8; For 100 feet: SL-ID-CCT-LP-100-A8

|         |  |         |  |
|---------|--|---------|--|
| Project |  | Type    |  |
| Date    |  | Contact |  |
| Notes   |  |         |  |