


Outdoor/Indoor RGBW (RGB+3000K)

This performance-driven Red, Green, Blue, White (RGBW) tape light offers vibrant RGB and 3000K warm white options with 252 LEDs per meter for smooth, even illumination. With a durable 3OZ PCB and IP67 rating, it's built for all weather conditions. It comes with power feeds on both ends, allowing you to cut and cap it, using the remaining piece without waste.

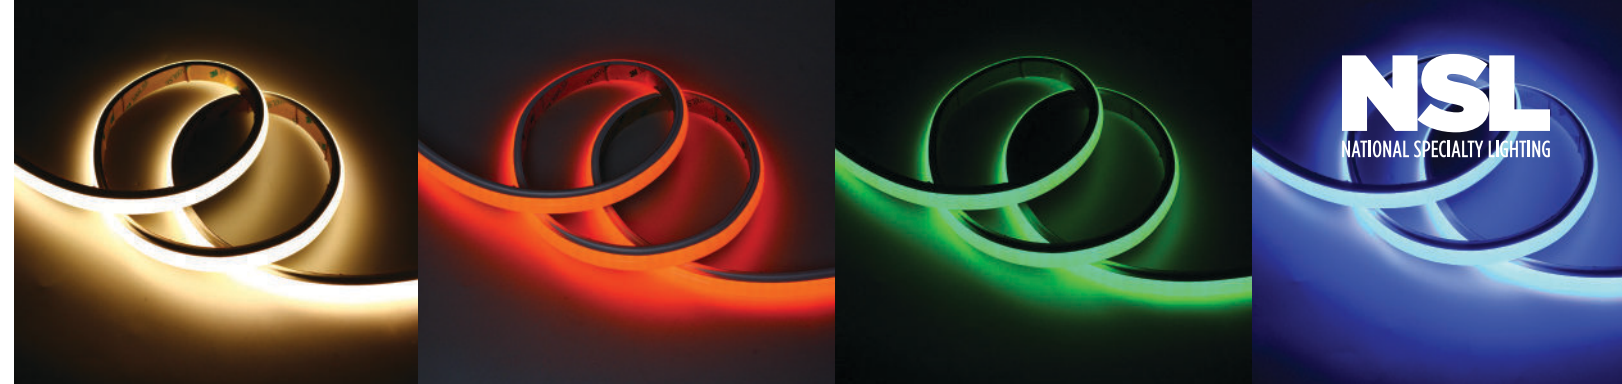

FEATURES


- Dual RGB and 3000K lighting options for versatile use.
- Power feeds on both ends allow cutting and reuse without waste.
- IP67 rating ensures protection against dust and water in outdoor environments.
- Supported by a 5-year warranty for reliable, long-term performance.
- End caps included.

APPLICATIONS

- Architectural
- Entertainment
- Retail

SPECIFICATIONS

Product Code		<ul style="list-style-type: none"> • SL-OD-RGB30K-XX-BA8 [XX: Length in feet; BA: 2835+2219 LED; 8: 8mm PCB]; • Available in 20 feet: SL-OD-RGB30K-20-BA8
Electrical	Input Voltage	24V DC
	Power Consumption	2.19W/ft (7.2W/m) for RGB, 2.19W/ft (7.2W/m) for 3000K
	Efficacy	70Lm/w
Specs	Color Temperature	RGB + 3000K
	Lumen Output	153Lm/ft (504Lm/m)
	Beam Angle	160°
LED	Chip Type	2835RGB + 2219WW
	CRI	90
	# per meter	252
	Binning	1BIN
	SDCM	<3
	Lifespan	50,000 Hours
Design	Dimensions (Inches)	.37" W
	Dimensions (Millimeters)	9.5mm W
	Max Length	40Ft (12M)
	Custom Cuttable	2.19" (55.56mm)
	IP Rating	IP67
	Approved Location	Outdoor/Indoor
Warranty	5 Years	
Approvals	cULus	

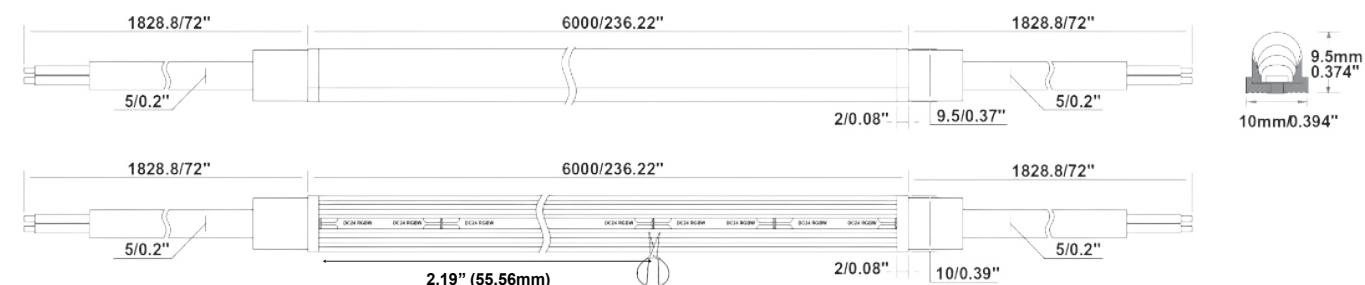

ACCESSORIES



SL-RGBW-MC
Mounting Clips



NFLX-GLUE
Silicone Glue



SL-RGBW-EX-39
1M Solid Mounting Extrusion

DRIVERS

Non-Dimmable



LEDDR-24-120W
Indoor/Outdoor driver
Max. recommended load:
90W;
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)



**PGID2448/
PGID2496**
Plug-in Driver

CONTROLLERS



CNTRL-AMP
5-Channel
High Performance Amplifier



CNTRL-RGBCCT
3 in 1 LED Strip Controller



CNTRL-4Z-RGBCCT-RM
4-Zone RGB+CCT Remote



CNTRL-8Z-RGBCCT-WP
8 Zone RGB+CCT
Wall Panel Remote