



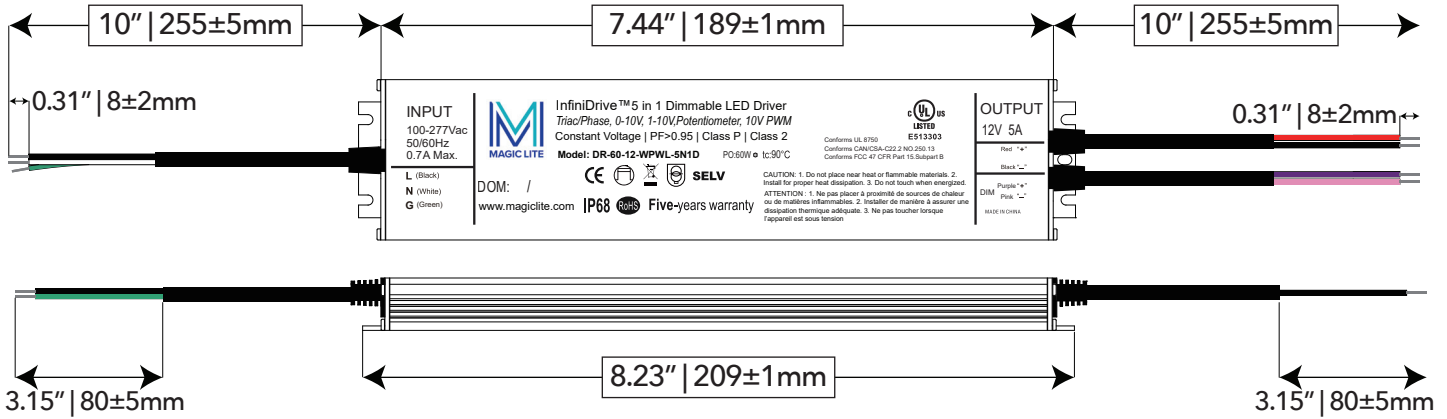

FEATURES

- Meet U.S., Canada standard
- Universal input range: 100-277Vac
- Short circuit, over voltage and overload protection
- Applied to LED advertising signs, cabinet
- Suitable for dry, damp, wet locations
- UL/cUL, FCC, Class P & 5 years warranty

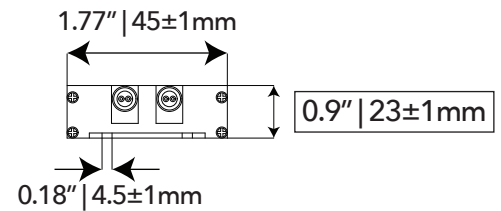

SPECIFICATIONS

Output Voltage	12Vdc ±0.5Vdc	Storage Temp.	-35°C to +85°C
Output Current	5A Max	Humidity Range	Working: up to 95% RH
Lifetime	50,000 hours @ Tc ≤ 80°C	Power Factor	≥0.7
Input Voltage Range	100-277Vac	MTBF	200,000 hours (25°C)
Approved Location	For dry, damp, wet locations	Output Power	60W Max
Dimensions	8.23"×1.77"×0.9" (209×45×23 mm)	Efficiency	85% (typ.)
Dimming Compatibility	5-in-1: MLV/TRIAC, 0-10V, PWM	Weight	0.4 kg
IP Rating	IP68 (Do not submerge)	Input Frequency	50/60Hz
Protection	Short Circuit, Over Voltage/Load	Warranty	5 Years
Certifications	UL/cUL, FCC, Class P	Working Temp.	-30°C to +50°C

Ordering Code(s) • **DR-60-12-WPWL-5N1D**

Project		Type	
Date		Contact	
Notes			