

# LED THIN STAR





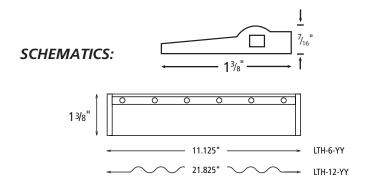



## **DESCRIPTION:**


Elegant, low profile LED under cabinet light fixture. Fixture vertical profile of only 7/16" for cabinets with little reveal. Available in four finishes of white, bronze, aluminum and black. Two fixture sizes of 6 LEDS and 12 LEDs per fixture. System scalable to a maximum combination of fixtures of 60 LEDs total per single run. Molded accessories provide 'plug-and-play' installation. System is dimmable with the appropriate LED Magnetic power supply and dimmer. ETL listed for indoor applications.

## **APPLICATIONS**

- ▶ Under Counter
- ▶ Work Stations
- Display Cases
- ▶ Cabinet Interiors
- **Podiums**
- ▶ Consoles

# **FEATURES**

- Low energy usage of 3.2w and 6.4w
- Pleasingly warm color temperature of 3000K
- Max. fixtures per LED Driver 5 pcs of 12-LED fixtures 10 pcs of 6-LED fixture or 60 total LEDs max. per driver
- Dimmable
- Mini USB connectors
- Easy mounting with either double-sided tape or wood screws



Fixture Colors: White, Bronze, Aluminum, Black

7/16" low profile

- Easy wiring with pre-molded extension cords and joiner sections
- Safe 24 Volt, Class 2 power supply (ordered separately)



Mini USB Connector on all cords



Fixture Joiner



#### Suitable for

• Surface mounted indoor applications

# ORDERING LOGIC:

LTH-X-YY

# X = NUMBER OF LEDS

### YY = FIXTURE FINISH

WH = WhiteBZ = Bronze

BK = BlackAL = Aluminum

## **SPECIFICATIONS:**

Voltage 24VDC

6 LED = 3.2 watts, 12 LED = 6.4 watts Wattage

LEDs rated at 40,000 hours LED Life

**LED Color Temperature** 3,000K +/- 200K

**Fixture Finish** White, bronze, aluminum, black 6 LED = 11.125", 12 LED = 21.825" **Fixture Length** Included double-sided tape and wood screws Mounting

Indoor listed SPT-1 cords allow wire to pass through cabinets with access, but not walls. Indoor listed CL2 cords Connection

allow wire to be passed through cabinets and walls to/between fixtures. See instructions for details.

Male/male: 1.5', 3', 6'. Maximum 91' total of extension cords per driver **Extension Cords** 

0.875" after installation Joiner White, Brown, Black **Cord Colors** 

White, Brown, Black, Aluminum **Joiner Colors** 

Dimmable with appropriate LED Magnetic Power Supply and dimmer. See instructions for details. **Dimming** 

ETL Listed for indoor applications Agency Approval Three years. See website for details. Warranty



PROJECT:	ТҮРЕ:
NOTES:	