


GDL-4 LED Gimbal Down Lights



DIMMABLE



The adjustable LED gimbal fixtures are 80% more efficient than incandescent luminaires and they are available in multiple trim finish options to match any style of decor.



Features

- Energy efficient – up to 80% energy savings
- High Brightness COB LED's
- Low power consumption
- Warm White and Neutral White color temperatures
- Available in two beam angles
- New Construction, IC and remote installations
- cETLus listed for direct contact with insulation and combustible materials
- Easy to install, modular design
- 50,000 hour life
- 3 year limited warranty

Specifications

Power Consumption	12W
Input Voltage	30V DC*, 320mA constant current
Beam Angle	25/36°
Color Temperature	
Warm White	3000 K
Neutral White	4000 K
Lumens	
Warm White	870
Neutral White	930
Size	1.97" x 5.1" (50 x 129.5mm)
Approvals	cETLus listed for damp locations

Ordering Code

GDL - 4 - 12W - - -

Beam Angle LED Color Finish


25 - 25 degrees WW - Warm White WH - White Gloss Enamel
36 - 36 degrees NW - Neutral White BL - Black
BZ - Bronze
SN - Satin Nickel

NOTE: WH finish is stock, all other options are special order, MOQ required.

Project		Type	
Date		Contact	
Notes			



Construction Plate

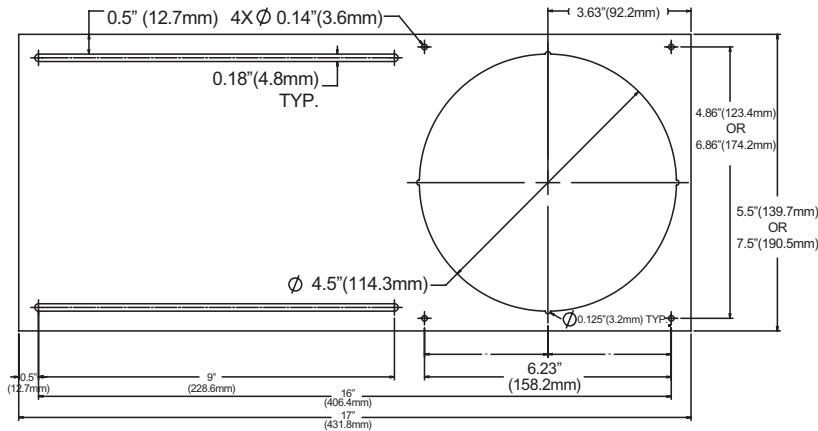

Note: this item is sold separately.

Compatible dimmers

Dimmable to 5% with most standard dimmers

Lutron

C.L™ Dimmers

DVELV-300

SELV-3600P

NTELV-300/600

MAELV-300/600

MRF2-6ND-120

Leviton

VPE04

6615

VPE06

VRE06

6672

6674

IPE04

